


1 320' FIELD POLE LOCATION PLAN
ES-3 NOT TO SCALE

- NOTES:**
- ALL WIRE AND CONDUIT IS 2#8, 1#10, 1-1/4" C UNLESS NOTED OTHERWISE.
 - ALL PULLBOXES ARE NO. 3-1/2 UNLESS OTHERWISE.
 - VERIFY LOCATION OF IRRIGATION CONTROLLER WITH IRRIGATION DRAWINGS.
 - SEE ONELINE DIAGRAM FOR CONDUIT AND WIRE SIZES.
 - TIMELOCKS, LIGHTING CONTROLLERS AND CONTACTORS SHALL BE LOCATED IN ELECTRICAL ROOM (TIMELOCKS AND LIGHTING CONTROLLERS TO 5, 6; CONTACTORS TO 6).
 - PROVIDE REMOTE METERING AT PANEL HB PER NPCO REQUIREMENTS.
 - PROVIDE PULLBOX PER NPCO REQUIREMENTS. SEE NPCO DWS. # WR-74032 FOR ADDITIONAL WORK.
 - PROVIDE 1-1/4" C.O. FROM PULLBOX TO BALLFIELD IRRIGATION CONTROLLER. SEE SHEET ES-2 FOR CONNECTION TO CCU ACROSS HYDE AVENUE.
 - PROVIDE ONE 30A, 1-POLE CIRCUIT BREAKER IN PANEL LB IN RESTROOM FOR SCOREBOARD POWER. SEE ARCHITECTURE DRAWINGS FOR RESTROOM ELECTRICAL INFORMATION.
 - PROVIDE FLUSH MOUNTED RECEPTACLE AND J-BOX IN BACKSTOP WALL.

BASE BID INCLUDES:

- ALL WORK SHOWN ON THIS SHEET. SEE SHEET ES-2 ALSO.

ENTIRE SHEET

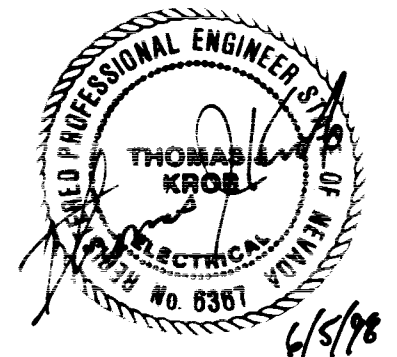

TJ KROB CONSULTING ENGINEERS, INC.
1919 S. JONES BLVD. SUITE B
LAS VEGAS, NEVADA 89102
(702) 871-3621
ELECTRICAL ENGINEERING

ELECTRICAL SITE PLAN
SCALE: 1"=30'-0"

DATE	10-1-97
REVISIONS	REVISED PER NPCO DRAWING WR-74032 9-2-97
	ADD CONDUIT FOR CCU CONNECTION 10-1-97
	ADD CONDUIT FOR SPRINT DWS NO. 47538 11-7-97
	ADD NOTES FOR BASE BID 1-16-98
	ADD PATH RELOCATION SCOREBOARD WIRING 6-4-98
CHECK BY	TOM KROB
DESIGN BY	DSW/KM
JOB NO.	7104/SITE 2
DATE	07/15/97
PROJECT	DEPARTMENT OF PARKS & LEISURE ACTIVITIES
FLD. BK. #	
SCALE (H) AS SHOWN	
PROJECT	TORREY PINES PARK AND BALLFIELD
SHEET	BALLFIELD SITE ELECTRICAL PLAN
DESIGNER	GLANVILLE ASSOCIATES LANDSCAPE ARCHITECTURE 25 MAGNOLIA AVE. SAN ANSELMO, CA 94960 PH. 415/453-9006
DRAWING NO.	ES-3
	650-41
	83

