

WHISPERING PINES - UNIT 2

A PORTION OF THE SE1/4 OF SECTION 36, T. 19 S., R. 60 E., M.D.M., CITY OF LAS VEGAS, CLARK COUNTY, NEVADA.

OWNER'S CERTIFICATE

VISTA HILLS, INC., A NEVADA CORPORATION
DOES HEREBY CERTIFY THAT IT IS THE OWNER OF THE PARCEL OF LAND WHICH IS SHOWN UPON THE PLAT OF WHISPERING PINES - UNIT 2
AND DOES HEREBY CONSENT TO THE PREPARATION AND RECORDATION OF THE PLAT AND DOES HEREBY OFFER AND DEDICATE TO THE CITY OF LAS VEGAS ALL THE STREETS AND PUBLIC RIGHTS-OF-WAY AS INDICATED AND OUTLINED HEREON FOR THE USE OF THE PUBLIC; FURTHERMORE, WE THE UNDERSIGNED OWNERS OF THE WITHIN PLATTED LANDS, HEREBY GRANT AND CONVEY TO NEVADA POWER COMPANY AND CENTRAL TELEPHONE COMPANY, JOINTLY AND SEVERALLY, AND TO THE CITY OF LAS VEGAS, SOUTHWEST GAS CORPORATION, THE LAS VEGAS VALLEY WATER DISTRICT AND COMMUNITY CABLE T.V., INC. AND TO THEIR SUCCESSORS AND ASSIGNS, A THREE FOOT WIDE EASEMENT ON ALL SIDE PROPERTY LINES AND UNDERGROUND SERVICES TO METER PANELS, A FIVE FOOT WIDE EASEMENT ON ALL PROPERTY LINES ABUTTING PUBLIC AND PRIVATE STREETS, INCLUDING ABOVE GROUND TRANSFORMER PADS AND AN ADDITIONAL TWO FEET AROUND TRANSFORMER PADS WITHIN THE PLATTED LANDS, FOR THE CONSTRUCTION, MAINTENANCE, OPERATION, AND FINAL REMOVAL OF STREET LIGHTS AND FIRE HYDRANTS, AND UNDERGROUND POWER, TELEPHONE, GAS, WATER AND CABLE T.V. LINES AND APPURTENANCES, TOGETHER WITH THE RIGHT OF INGRESS AND EGRESS THERETO.
DATED THIS 12TH DAY OF NOVEMBER, 1987.

VISTA HILLS, INC., A NEVADA CORPORATION, BY:

Ralph Henley
RALPH HENLEY, VICE PRESIDENT

WE, THE HEREIN NAMED UTILITY COMPANIES AND AGENCIES, APPROVE THE GRANT OF THE DESIGNATED EASEMENTS.

Robert J. Owen 8-10-87
COMMUNITY CABLE T.V., INC. - ROBERT J. OWEN DATE

Joseph P. Fielding 8/7/87
NEVADA POWER COMPANY - JOSEPH P. FIELDING DATE

Dean T. Whitman 08-06-87
CENTRAL TELEPHONE COMPANY - DEAN T. WHITMAN DATE

Thomas J. Hosea 8/6/87
SOUTHWEST GAS CORPORATION - THOMAS J. HOSEA DATE

Leanne L. Miller 8/4/87
LAS VEGAS VALLEY WATER DISTRICT - LEANNE L. MILLER DATE

Gary A. Presswood 3-10-88
CITY OF LAS VEGAS - GARY A. PRESSWOOD DATE


ACKNOWLEDGEMENT

STATE OF NEVADA SS
COUNTY OF CLARK

ON THIS 12TH DAY OF NOVEMBER, 1987, PERSONALLY APPEARED BEFORE ME
VICKY S. TROY, A NOTARY PUBLIC IN AND FOR SAID COUNTY AND STATE
RALPH HENLEY, VICE PRESIDENT

WHO EXECUTED THE FOREGOING INSTRUMENTS, WHO ACKNOWLEDGED TO ME THAT (THEY HE SHE) EXECUTED THE SAME FREELY AND VOLUNTARILY AND FOR THE USES AND PURPOSES THEREIN MENTIONED.

Vicky S. Troy
VICKY S. TROY
NOTARY PUBLIC IN AND FOR SAID COUNTY AND STATE
MY COMMISSION EXPIRES MAR 18, 1991



CITY ENGINEER'S CERTIFICATE

I, GARY A. PRESSWOOD, CITY ENGINEER OF THE CITY OF LAS VEGAS, DO HEREBY CERTIFY THAT I HAVE EXAMINED THE FINAL SUBDIVISION MAP OF WHISPERING PINES - UNIT 2
AND AM SATISFIED THAT THE MAP IS TECHNICALLY CORRECT. MONUMENTS HAVE NOT BEEN SET, BUT A PROPER PERFORMANCE BOND HAS BEEN DEPOSITED TO GUARANTEE THEIR SETTING ON OR BEFORE APRIL 1, 1989.

Gary A. Presswood
GARY A. PRESSWOOD
CITY ENGINEER, LAS VEGAS, NEVADA
R.P.E. 7569

3-10-88
DATE

DIVISION OF WATER RESOURCES CERTIFICATE

THIS FINAL MAP IS APPROVED BY THE DIVISION OF WATER RESOURCES OF THE DEPARTMENT OF CONSERVATION AND NATURAL RESOURCES CONCERNING WATER QUANTITY SUBJECT TO THE REVIEW OF APPROVAL ON FILE IN THIS OFFICE.

George W. Quinn 31 August 1987
DIVISION OF WATER RESOURCES - GEORGE W. QUINN DATE

CLARK COUNTY HEALTH DISTRICT CERTIFICATION

THIS FINAL MAP IS APPROVED BY THE CLARK COUNTY HEALTH DISTRICT FOR THE HEALTH DIVISION OF THE DEPARTMENT OF HUMAN RESOURCES. THIS APPROVAL CONCERNS SEWAGE DISPOSAL, WATER POLLUTION, WATER QUALITY AND WATER SUPPLY FACILITIES AND IS PRECATED UPON PLANS FOR A (PUBLIC, PRIVATE) WATER SUPPLY AND A (COMMUNITY, INDIVIDUAL) SYSTEM FOR DISPOSAL OF SEWAGE.

Lonnie C. Empey 11-4-87
CLARK COUNTY HEALTH DISTRICT - LONNIE C. EMPEY DATE

APPROVAL

I CERTIFY THAT THIS FINAL MAP SUBSTANTIALLY COMPLIES WITH THE TENTATIVE MAP AND ANY APPROVED ALTERATIONS THERETO; THAT THE MAP COMPLIES WITH APPLICABLE STATUTORY AND ORDINANCE PROVISIONS; AND THAT ALL CONDITIONS IMPOSED UPON THE FINAL MAP HAVE BEEN MET.

Harold P. Foster 8/5/87
HAROLD P. FOSTER
DIRECTOR OF COMMUNITY PLANNING AND DEVELOPMENT
CITY OF LAS VEGAS DATE

APPROVAL

THIS MAP IS APPROVED AND THE PARCELS HEREIN OFFERED FOR DEDICATION ARE ACCEPTED THIS 5TH DAY OF AUGUST, 1987, BY THE CITY COUNCIL OF THE CITY OF LAS VEGAS.

Ron Lurie 8/5/87
RON LURIE
MAYOR DATE
Kathleen M. Tighe 8/5/87
KATHLEEN M. TIGHE
CITY CLERK DATE



BASIS OF BEARINGS


N.87°34'40"E., being the South line of the Southeast Quarter (SE1/4) of Section 36, T. 19 S., R. 60 E., M.D.M., as shown by a map on file in the Office of the County Recorder, Clark County, Nevada, in File 45 of Records of Surveys, Page 33.

SURVEYOR'S CERTIFICATE

I, GENE D. KRAMETBAUER, A REGISTERED LAND SURVEYOR IN THE STATE OF NEVADA, CERTIFY THAT:

- THIS IS A TRUE AND ACCURATE REPRESENTATION OF THE LANDS SURVEYED UNDER MY SUPERVISION AT THE INSTANCE OF VISTA HILLS, INC.
- THE LANDS SURVEYED LIE WITHIN THE SE1/4 OF SECTION 36, T. 19 S., R. 60 E., M.D.M.
AND THE SURVEY WAS COMPLETED ON 10/12/84
- THIS PLAT COMPLIES WITH THE APPLICABLE STATE STATUTES AND ANY LOCAL ORDINANCES.
- THE MONUMENTS WILL BE OF THE CHARACTER SHOWN AND OCCUPY THE POSITIONS INDICATED BY APRIL 1, 1989, AND THAT AN APPROPRIATE PERFORMANCE BOND HAS BEEN POSTED WITH THE GOVERNING BODY TO ASSURE THEIR INSTALLATION.

Gene D. Krametbauer
GENE D. KRAMETBAUER, R.L.S.
NEVADA CERTIFICATE NO. 6201

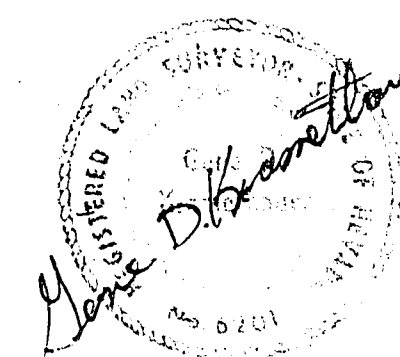

LEGAL DESCRIPTION

That portion of the Southeast Quarter (SE1/4) of Section 36, T. 19 S., R. 60 E., M.D.M., City of Las Vegas, Clark County, Nevada, described as follows:

COMMENCING at the Southeast Corner (SE Cor.) of said Southeast Quarter (SE1/4), thence S.87°34'40"W., along the South line thereof, 1525.70 feet; thence N.02°25'20"W., 450.00 feet to the TRUE POINT OF BEGINNING; thence S.87°34'40"W., 300.00 feet; thence N.02°25'20"W., 293.06 feet to a point on a curve concave Northwesterly and having a radius of 4450.00 feet, a radial line to said point bears S.43°08'20"E.; thence Northeasterly along said curve, through a central angle of 98°51'51", an arc distance of 688.45 feet to a point; thence S.52°00'11"E., along a radial line, 105.00 feet to a point on a curve concave Northwesterly and having a radius of 4555.00 feet; thence Northeasterly along said curve through a central angle of 90°18'27", an arc distance of 24.44 feet to a point; thence S.52°18'37"E., along a radial line, 50.00 feet to a point on a curve concave Easterly and having a radius of 15.00 feet; thence Southerly along said curve, through a central angle of 86°13'31", an arc distance of 22.57 feet to a point of tangency; thence S.48°32'08"E., 182.04 feet to a point of tangency with a curve concave Northerly and having a radius of 15.00 feet; thence Easterly along said curve, through a central angle of 85°08'45", an arc distance of 24.91 feet to a point; thence S.53°40'53"E., along a radial line, 50.00 feet; thence S.36°19'07"W., 11.79 feet to a point of tangency with a curve concave Easterly and having a radius of 15.00 feet; thence Southerly along said curve, through a central angle of 76°20'33", an arc distance of 19.99 feet to a point of reverse curvature with a curve concave Southwesterly and having a radius of 400.00 feet, a radial line to said point bears S.49°58'34"W.; thence Southeasterly along said curve, through a central angle of 02°36'42", an arc distance of 18.23 feet to a point of tangency; thence S.37°24'44"E., 82.73 feet; thence N.52°35'16"E., 75.00 feet; thence N.03°59'06"W., 37.87 feet; thence N.36°19'07"E., 200.00 feet; thence N.59°24'54"E., 52.98 feet; thence N.87°34'40"E., 153.12 feet; thence S.02°25'20"E., 294.12 feet; thence N.87°34'40"E., 29.64 feet; thence S.02°25'20"E., 105.00 feet; thence S.87°34'40"W., 146.31 feet; thence S.00°05'20"W., 6.55 feet; thence S.67°33'43"W., along a radial line, 155.48 feet to a point on a curve concave Southwesterly and having a radius of 375.00 feet; thence Northwesterly along said curve, through a central angle of 02°16'36", an arc distance of 14.90 feet to a point; thence S.65°17'07"W., along a radial line, 167.73 feet; thence N.18°44'28"W., 35.29 feet; thence S.68°19'03"W., along a radial line, 167.50 feet to a point on a curve concave Southwesterly and having a radius of 325.00 feet; thence Southeasterly along said curve, through a central angle of 02°49'08", an arc distance of 15.99 feet to a point; thence S.71°08'12"W., along a radial line, 105.00 feet; thence N.29°30'59"W., 60.78 feet; thence N.40°13'54"W., 61.27 feet; thence N.55°11'55"W., 26.09 feet; thence N.56°47'21"W., 37.23 feet; thence N.73°46'02"W., 64.41 feet; thence N.88°47'44"W., 82.45 feet; thence S.02°25'20"E., 105.00 feet; thence S.87°34'40"W., 16.08 feet; thence S.02°25'20"E., 138.89 feet; thence S.37°12'39"E., 25.70 feet to the TRUE POINT OF BEGINNING.

Containing 12.0496 acres, more or less.

W.Q. No. 3522-2

NO. 00414
FILED AT THE REQUEST OF:
VTN nevada
DATED 3/21/88 BY M.
BOOK 39 PAGE 15
OF PLATS
OFFICIAL RECORDS BOOK, NO. 880321
CLARK COUNTY, NEVADA RECORDS
JOAN L. SWIFT, RECORDER
DEPUTY
3333-2