


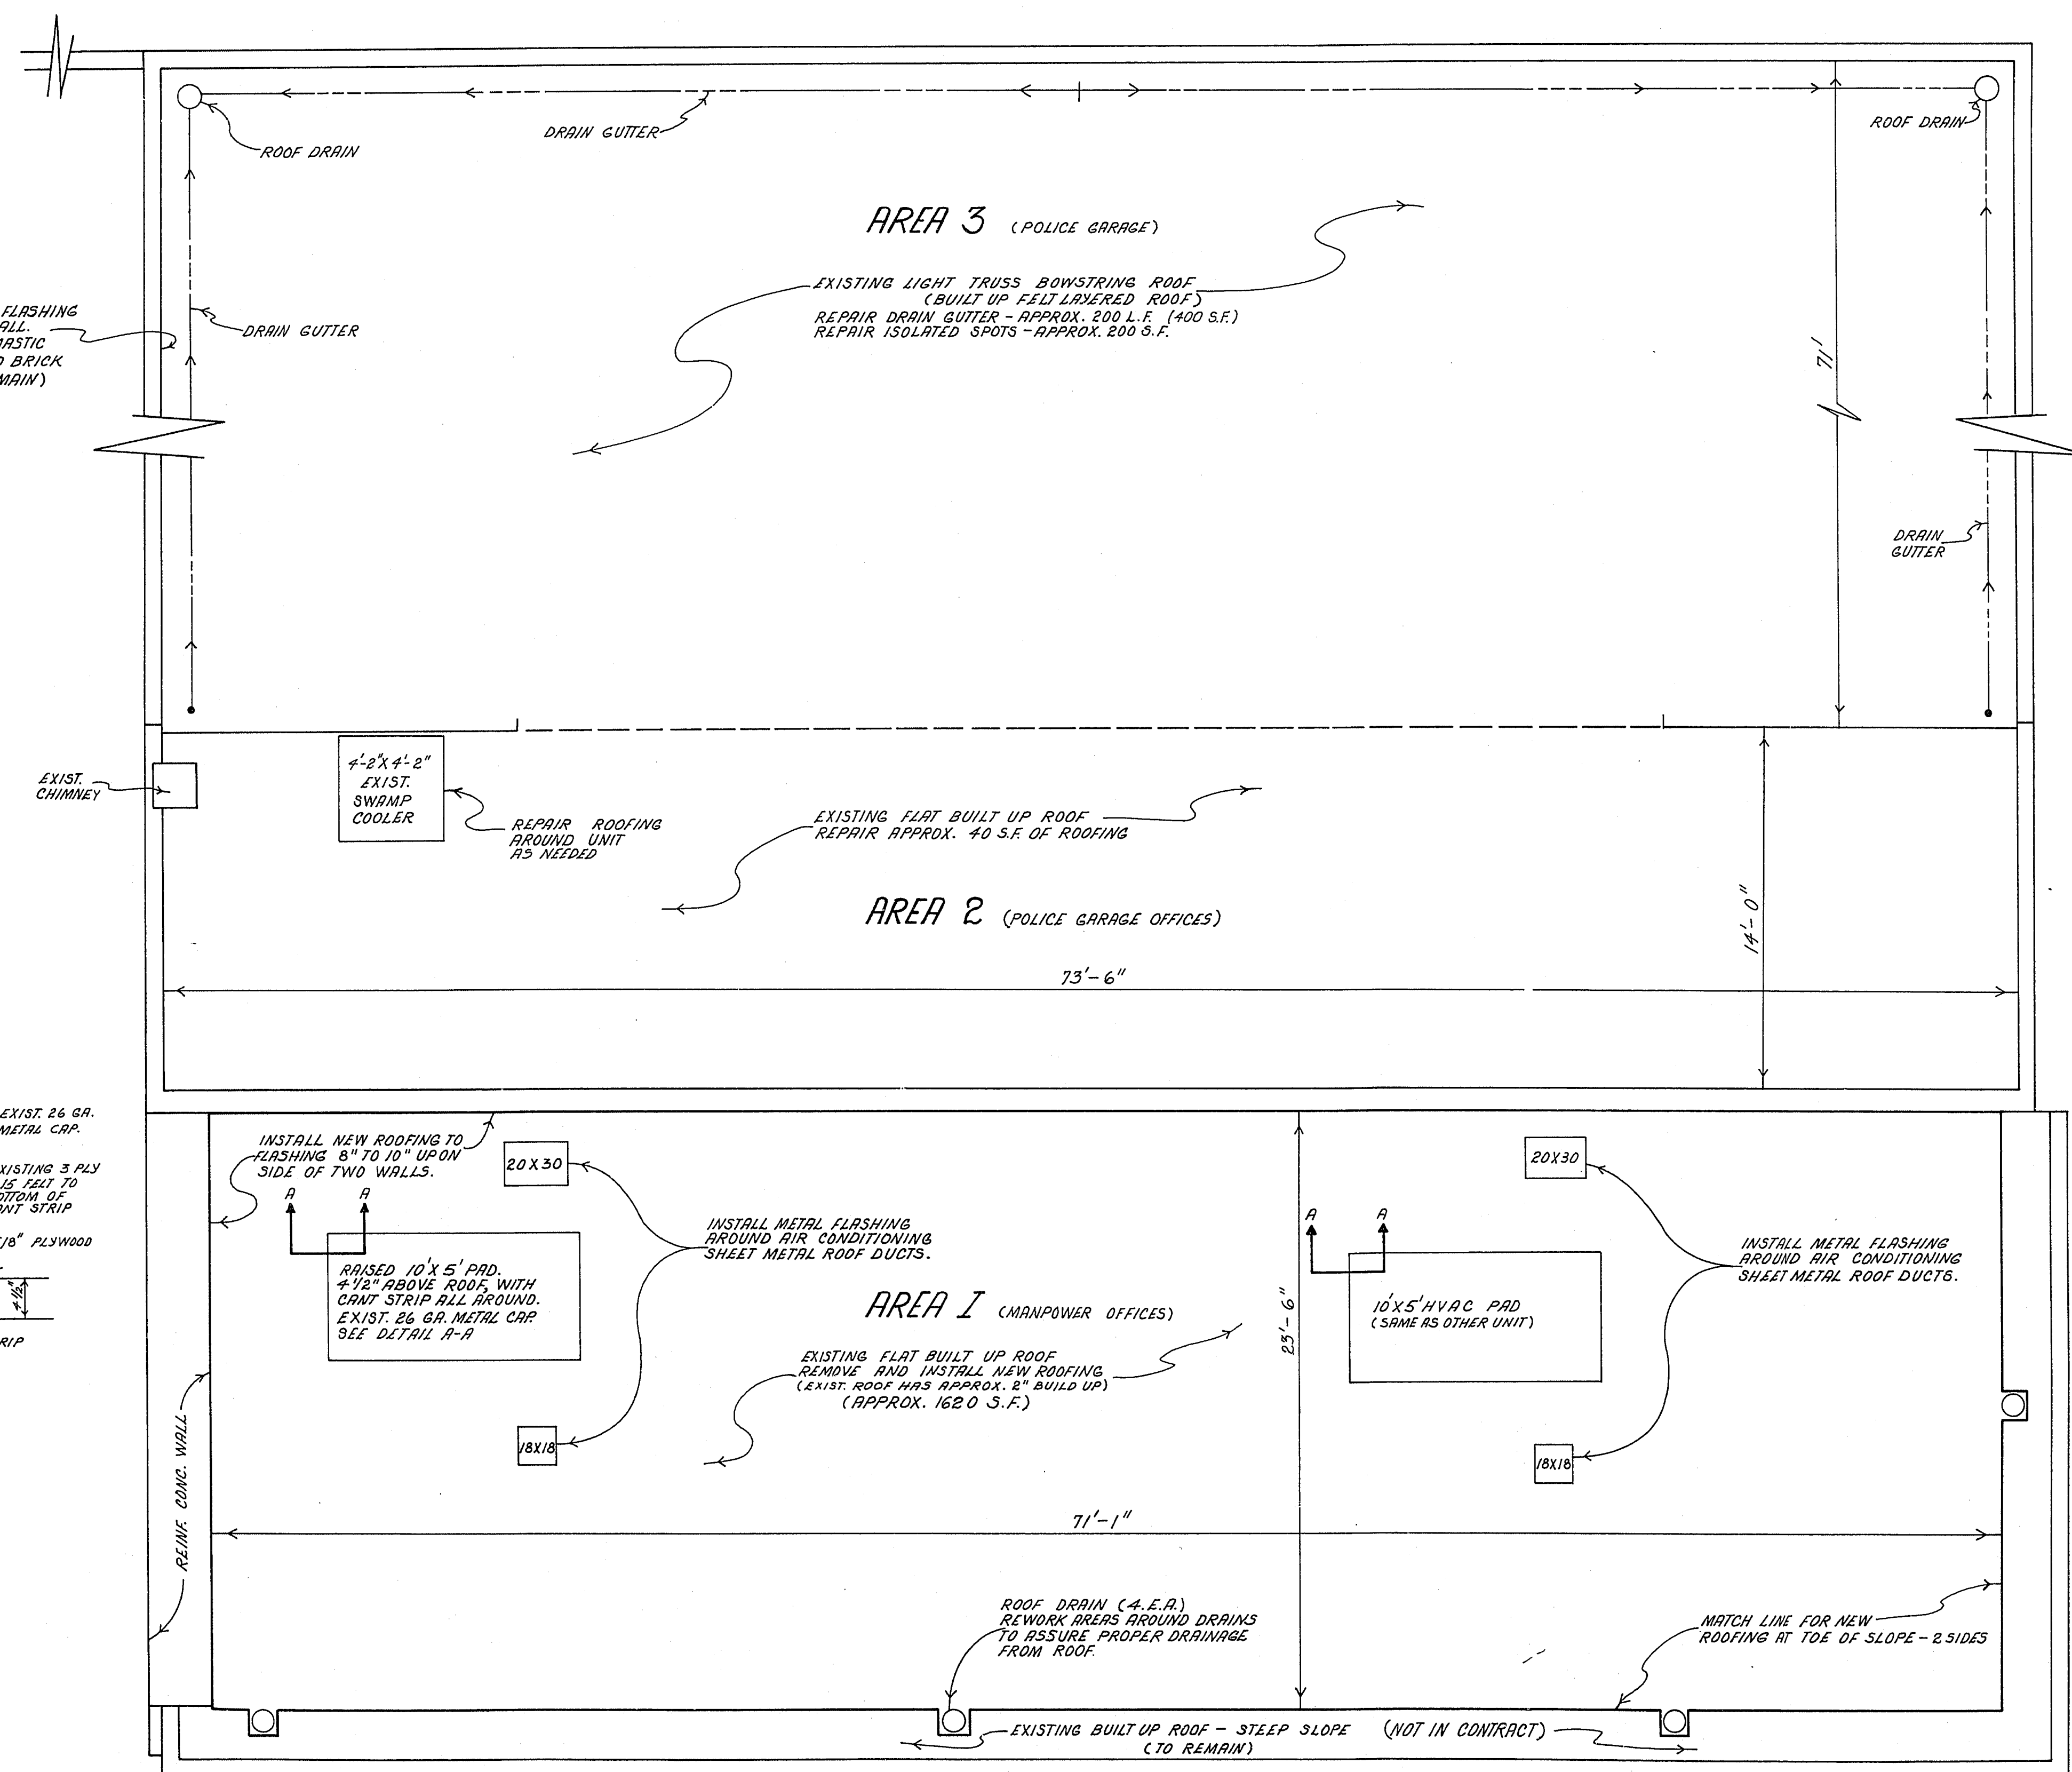

GENERAL NOTES

AREA 1 — (FLAT)


1. REMOVE APPROX. 1500 S.F. OF EXISTING ROOFING FROM CAP FLASHING ON TWO SIDES TO MATCH LINE (TOE OF SLOPE) ON OTHER TWO SIDES. (EXIST. BUILT UP ROOFING IS APPROX. 2" THICK)
2. INSTALL APPROX. 1620 S.F. OF BUILT UP ROOFING. SEE TECHNICAL SPECIFICATIONS.
3. INSTALL APPROX. 30 L.F. OF METAL FLASHING AROUND EXISTING AIR CONDITIONING DUCTS.
4. REWORK AREAS AROUND FOUR ROOF DRAINS TO ASSURE DRAINAGE FROM ROOF. LOWER DRAIN FIXTURES IF NECESSARY.
5. MATCH TO EXISTING ROOFING AT TOE OF SLOPE ON TWO SIDES. PROVIDE PROPER LAP AND TIE IN.
6. STRAIGHTEN, REPAIR, OR REPLACE WALL CAP FLASHING. APPROX. 30 L.F.

AREA 2 — (FLAT)

1. APPROX. 40 S.F. OF ROOFING REPAIR AROUND COOLER UNIT AND ISOLATED SPOTS.
2. ANY ADDED ROOFING REPAIR WILL BE MAKE ONLY UPON APPROVAL OF THE ENGINEER.

AREA 3 — (STEEP SLOPE)

1. REPAIR APPROX. 200 L.F. OF ROOF DRAINAGE CHANNELS (3 SIDES) LOCATED NEAR WALLS. THIS IS APPROX. 400 S.F. OF ROOFING REPAIR.
2. APPROX. 200 S.F. OF ROOFING REPAIR IN ISOLATED SPOTS OVER THE REMAINDER OF AREA.
3. STRAIGHTEN, REPAIR, OR REPLACE WALL CAP FLASHING. APPROX. 50 L.F.

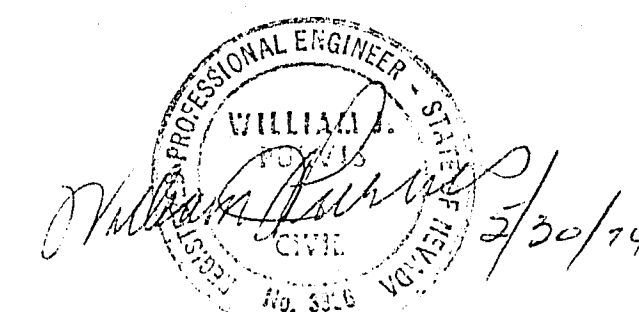

APPROVAL: *William J. Ellison* DATE: 5-29-74
SUPT. OF MAINT.



Department of Public Works
Engineering Division

ROOFING
MANPOWER OFFICE
(OLD TOYOTA BLDG.)

scale (h) 1/4" = 1'-0"	scale (v)	drawing no.
w.o.no. 6682	t.bk.no. NONE	513-54C
design by D. Mc GONIGLE	drawn by ELLISON	date 5-21-74
approved by Director of Public Works	date 5/30/74	sh. 1 of 1