


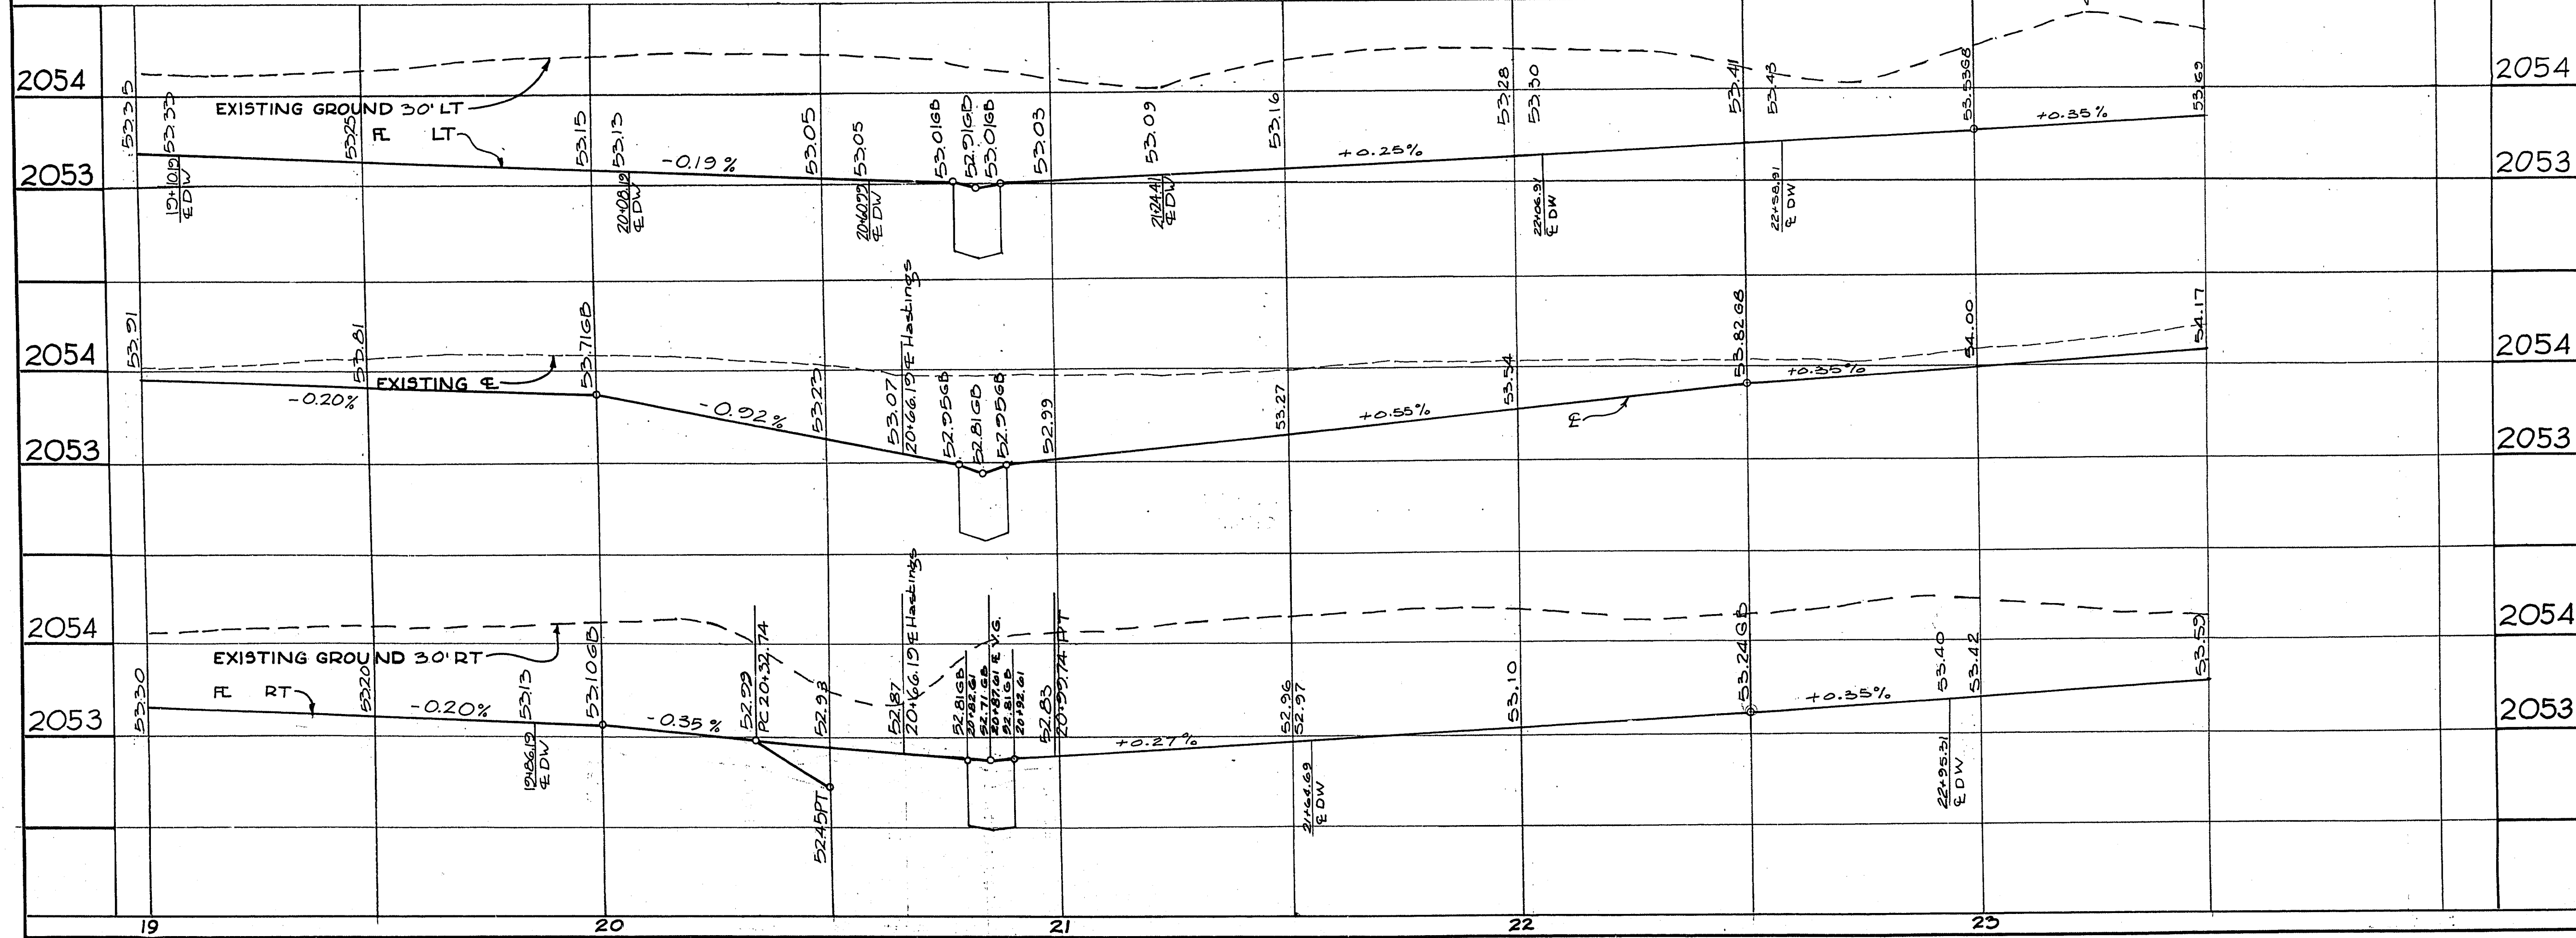

APPROXIMATE QUANTITIES - THIS SHEET				APPROXIMATE QUANTITIES - THIS SHEET			
ITEM	DESCRIPTION	UNIT I	UNIT II	CLV	UNIT	ITEM	DESCRIPTION
201100	Save cut	7.5	3.0		LF		
201100	Excavation	1420	193		CY		
302100	Type I gravel base	342	44		CY		
302200	Type II gravel base	257	3		CY		
302300	Fog seal	2319			SY		
302400	1-1/2" A.C. pavement		12		SY		
302500	2" A.C. pavement		847		SY		
302600	Type "L" curb & gutter		213		LF		
302700	Residential driveway trans.				SF		
302800	Valley gutter				SF		
302900	Adjust manhole				EA		
CURVE DATA				CURVE DATA			
	CURVE	DELTA	RADIUS	LENGTH	TANGENT	PC STA.	PT. STA.
	BC	89°55'45"	15.00'	23.54'	14.98'	20+32.74	0+39.96
	BC	90°04'15"	15.00'	23.58'	15.02'	0+40.04	20+50.74

BM #1614B3
ELEV 2057.81
SV COR. WESTWOOD &
CHARLESTON

APPROVED: [Signature]
TRAFFIC ENGR. DATE 12-7-70

DATE 12-7-70

REVISION NO.	DESCRIPTION	BY	DATE	APPROVAL
1				

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

SID490 SHADOW LN
STA. 19+00 to 23+50

W.O. NO. 4900	F.B.K. NO. 678X-68-11X	DATE	DRAWING NO.
SC (H) 1"=20'	SC (V) 1"=1'	08-08-70	107V800
DES. G. BILLINGSLEY			FILE NO.
DR. D. STEWART + C. KREHNOVI			
APPROVED BY DIRECTOR OF PUBLIC WORKS			

[Signature]

SHEET 3 OF 33