



GENERAL NOTES

1. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE STANDARD DRAWINGS AND "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA, NEVADA" ISSUE OF JANUARY, 1966, UNLESS OTHERWISE SPECIFIED BY NOTE ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
2. ALL UTILITY COMPANIES SHALL BE NOTIFIED BY THE CONTRACTOR AT LEAST 48 HOURS PRIOR TO BEGINNING CONSTRUCTION.
3. THE OWNING UTILITY COMPANY SHALL BE RESPONSIBLE FOR REMOVAL OR RELOCATION OF ALL POWER POLES, TELEPHONE POLES, JOINTLY-OWNED POLES AND RELATED APPURTENANCES THAT INTERFERE WITH REQUIRED IMPROVEMENTS AS SHOWN ON THE PLANS, AND IN ACCORDANCE WITH C.L.V. STD. DWG. 44.0, 44.1, AND 40.0.
4. THE LAS VEGAS VALLEY WATER DISTRICT SHALL BE RESPONSIBLE FOR THE REMOVAL OR RELOCATION OF ALL WATER METERS THAT INTERFERE WITH REQUIRED IMPROVEMENTS AS SHOWN ON THE PLANS AND IN ACCORDANCE WITH C.L.V. STD. DWG. 56.05.
5. THE SOUTHWEST GAS COMPANY SHALL BE RESPONSIBLE FOR THE REMOVAL OR RELOCATION OF ALL GAS LINES AND RELATED APPURTENANCES THAT INTERFERE WITH REQUIRED IMPROVEMENTS AS SHOWN ON THE PLANS.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE VERTICAL ADJUSTMENT OF ALL SANITARY SEWER MANHOLES TO THE REQUIRED FINISHED GRADE AS SHOWN ON THE PLANS AND IN ACCORDANCE WITH SECTION 512 OF THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION".
7. ALL BARRICADING AND TEMPORARY TRAFFIC CONTROL DEVICES OR METHODS TO BE USED DURING CONSTRUCTION SHALL BE DONE IN ACCORDANCE WITH THE CITY OF LAS VEGAS "TRAFFIC BARRICADING MANUAL" ISSUE OF JULY, 1966, WITH CURRENT REVISIONS, AVAILABLE FROM THE DIVISION OF TRAFFIC ENGINEERING, 821 LAS VEGAS BLVD. NORTH.
8. EXISTING IMPROVEMENTS, TREES, SHRUBS, WALLS, FENCES, SIGNS, STRUCTURES, ETC., WITHIN THE STREET RIGHT OF WAY THAT WILL INTERFERE WITH CONSTRUCTION SHALL BE REMOVED AS DIRECTED BY THE ENGINEER.
9. ALL REPLACEMENT, RELOCATION OR RECONSTRUCTION OF EXISTING IMPROVEMENTS, SPRINKLER SYSTEMS, SHRUBS, FENCES, WALLS, SIGNS, STEPS, SIDEWALKS, DRIVEWAYS, ETC., SHALL BE DONE AS DIRECTED BY THE ENGINEER.
10. THE CONTRACTOR SHALL BACKFILL, GRADE AND CLEAN-UP ALL CUT OR FILL SLOPES TO MEET EXISTING CONDITIONS. WHERE LAWNS ARE EXISTING THE CONTRACTOR SHALL RESEED AND/OR SOD THE AFFECTED AREA TO ACHIEVE A CONDITION EQUAL TO, OR BETTER THAN, CONDITIONS PREVIOUSLY EXISTING, (EXCEPT LAWNS EXISTING WITHIN THE STREET RIGHT OF WAY).
11. EXISTING PRIVATELY OWNED MAIL BOXES WITHIN THE STREET RIGHT OF WAY THAT INTERFERE WITH THE CONSTRUCTION SHALL BE REMOVED AND RELOCATED BY THE PROPERTY OWNER.
12. ADJUSTMENT OF ALL WATER VALVE COVERS, OTHER THAN THOSE AT FIRE HYDRANTS, ARE THE RESPONSIBILITY OF THE LAS VEGAS VALLEY WATER DISTRICT.
13. ALL DRIVEWAYS SHALL BE BROUGHT TO FINAL BACK OF SIDEWALK GRADE AND TRANSITIONED FROM THE RIGHT OF WAY LINE AWAY FROM THE ROADWAY AT GRADES NOT TO EXCEED $\pm 10\%$. NECESSARY FILL SHALL BE TYPE II GRAVEL.


LEGEND


1. SEE C.L.V. STD. DWG. D-1, D-1.1, D-1.2 AND D-1.3 FOR STANDARD LEGEND SYMBOLS, EXCEPT AS SHOWN BELOW.
2. ALL ABBREVIATIONS SHOWN ON THE PLANS CONFORM TO SECTION 2 OF THE "UNIFORM STANDARD SPECIFICATIONS".

	REQUIRED CONCRETE CURB AND GUTTER.
	REQUIRED CURB CUT
	EXISTING CONCRETE CURB AND GUTTER TO REMAIN IN PLACE EXCEPT AS NOTED.
	EXISTING CONCRETE BLOCK WALL TO REMAIN IN PLACE.
	EXISTING PAVEMENT TO REMAIN

QUANTITIES

ITEM	DESCRIPTION	UNIT I	UNIT I	UNIT II	CLV	TOTAL	UNIT
121.415C	15" RCP				351	351	LF
200.110	Remove "L" type curb & gutter				392	392	LF
200.110	Remove sidewalk				931	931	SF
200.400	Remove tree (over 10" diam.)		1	2		3	EA
201.100	Sawcut	836	747	336	392	2311	LF
201.100	Excavation	3508	4356	1063	171	9098	CY
302.100	Type I gravel base	1360	2185	434	60	4039	CY
302.200	Type II gravel base	984	1448	21	67	2520	CY
333.100	Fog seal	8605	12987	51	133	21776	SY
200.300	Remove tree (4"-10" diam.)	1				1	EA
334.003	1-1/2" A.C. pavement			163	208	371	SY
334.004	2" A.C. pavement	8605	12987		133	21725	SY
340.014	Type "L" curb & gutter			7269	321	7590	LF
340.114	Concrete sidewalk				558	558	SF
340.226	Residential driveway transition			1080		1080	SF
340.318	Valley gutter	2009	1571			3580	SF
500.200	Drop inlet				1	1	EA
500.500	Junction box				1	1	EA
512.120	Adjust manhole	9	8			17	EA
560.080	Relocate fire hydrant		2			2	EA
340.326	Alley gutter	216	117			333	SF
500.201	Revise drop inlet				1	1	EA
530.100	Barricade				32	32	LF
200.110	Remove conc. driveway			221		221	SF

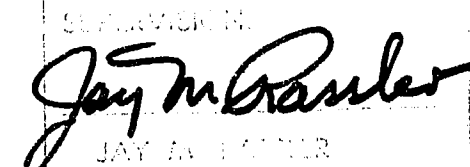
JAY M. BRAINER
R.P.E. 1624
DATE 12-7-70

CITY OF LAS VEGAS NEVADA			
DEPARTMENT OF PUBLIC WORKS			
SERVICES DIVISION			
SID 490			
SHADOW LN., DESERT LN. & ELLIS AVE.			
W.D. NO. 4900	P.B. NO.	DATE	DRAWING NO.
SC. (H)	SC. (V)	06-08-70	107V800
DES.		30 JUN 60	FILE NO.
DR. C. KREHNOVI			
APPROVED BY DIRECTOR OF PUBLIC WORKS			
			
SHEET 2 OF 35			

154-61