


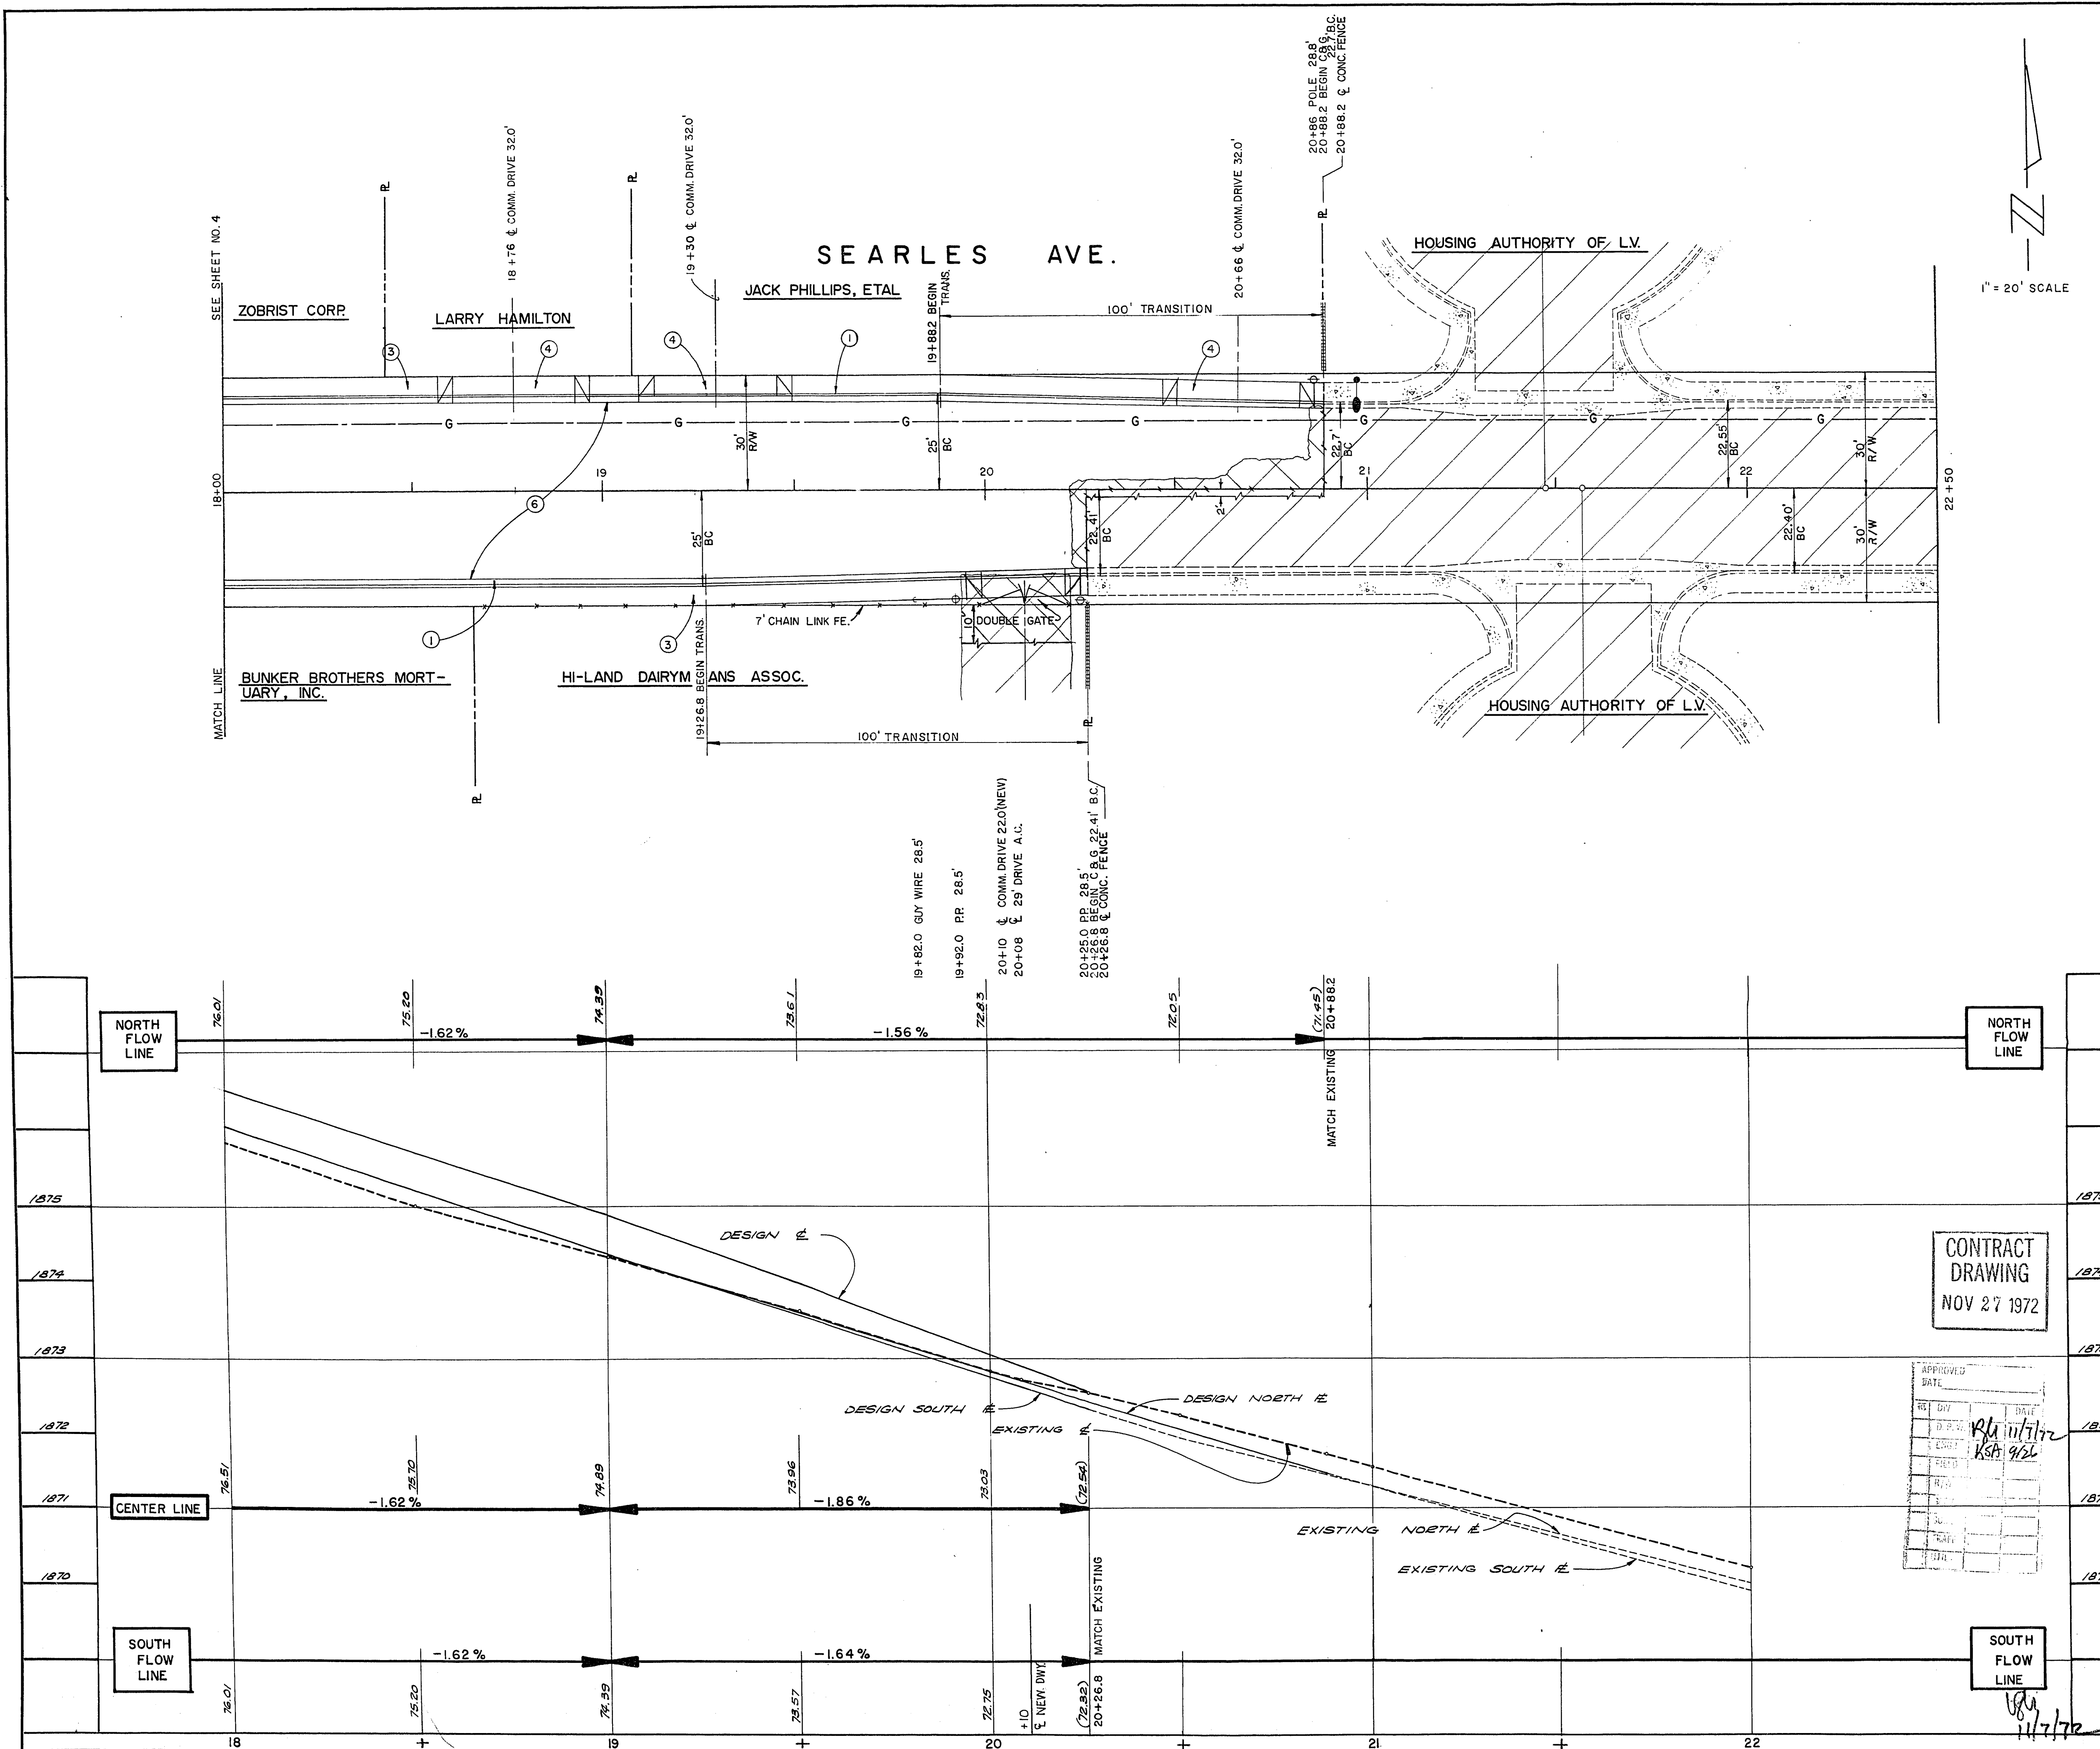

1" = 20' SCALE

APPROXIMATE QUANTITIES - THIS SHEET			
ITEM	DESCRIPTION	UNIT	QUANTITY
201.100	ROADWAY EXCAVATION	CUYD.	480
⑥ 334.004	CONSTRUCT 2" A.C. P.V.T.	TON	155
① 340.014	CONSTRUCT CONC. C. & G.	LIN.FT.	365
③ 340.114	CONSTRUCT CONC. S.W.	SQ.FT.	1825
④ 340.226	CONSTRUCT COMM. DRIVE	SQ.FT.	1050
302.200	CONSTRUCT GRAVEL BASE T. II	CUYD.	194
302.100	CONSTRUCT GRAVEL BASE T. I	CUYD.	359
333.100	FOG SEAL	GAL.	199
200.120	SAWCUT A.C.	LIN.FT.	132
334.800	PRIME COAT	GAL.	384
200.124	REMOVE A.C. IN DWY	SY.	58
EXISTING UTILITIES ARE LOCATED ON THE PLANS FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. THE CONTRACTOR SHALL BEAR FULL RESPONSIBILITY FOR PROTECTION OF UTILITIES AND THE CITY BEARS NO RESPONSIBILITY FOR UTILITIES NOT SHOWN ON THE PLANS OR NOT IN THE LOCATION SHOWN ON THE PLANS.			
SUMMARY OF APPROXIMATE QUANTITIES - TOTAL			
ITEM	DESCRIPTION	UNIT	QUANTITY
201.100	ROADWAY EXCAVATION	CUYD.	5354
⑥ 334.004	CONSTRUCT 2" A.C. P.V.T.	TON	1211
① 340.014	CONSTRUCT CONC. C. & G.	LIN.FT.	3632
③ 340.114	CONSTRUCT CONC. S.W.	SQ.FT.	18160
④ 340.226	CONSTRUCT COMM. DRIVE	SQ.FT.	3010
302.200	CONSTRUCT GRAVEL BASE T. II	CUYD.	1488
302.100	CONSTRUCT GRAVEL BASE T. I	CUYD.	2863
333.100	FOG SEAL	GAL.	1558
200.123	SAWCUT A.C.	LIN.FT.	236
② 200.110	REMOVE C & G	L. F.	100
334.800	PRIME COAT	GAL.	3102
200.124	REMOVE A. C. P.V.T.	S.Y.	147
REVISIONS			
REVISION NO.	DESCRIPTION	BY	DATE
1	UPDATE PLANS	W.J.	2-72
CITY OF LAS VEGAS NEVADA DEPARTMENT OF PUBLIC WORKS SERVICES DIVISION			
SEARLES AVE STA 18+00 to STA 22+50			
W.O. NO. 4073	F.B.K. NO. 65-7X	DATE	DRAWING NO.
SC. (H) 1" = 20'	SC. (V) 1" = 1'		S.I.D. 407-3-4
DES. K. ANDERSON			FILE NO.
DR. CARLOS J. L.			107-V763
APPROVED BY DIRECTOR OF PUBLIC WORKS			SHEET 5 OF 5