


B. M. * 23 - ELEV. 2042.04 - SOUTH END OF
CIRCLE, FAIRFIELD & BOSTON

2062

2060

2058

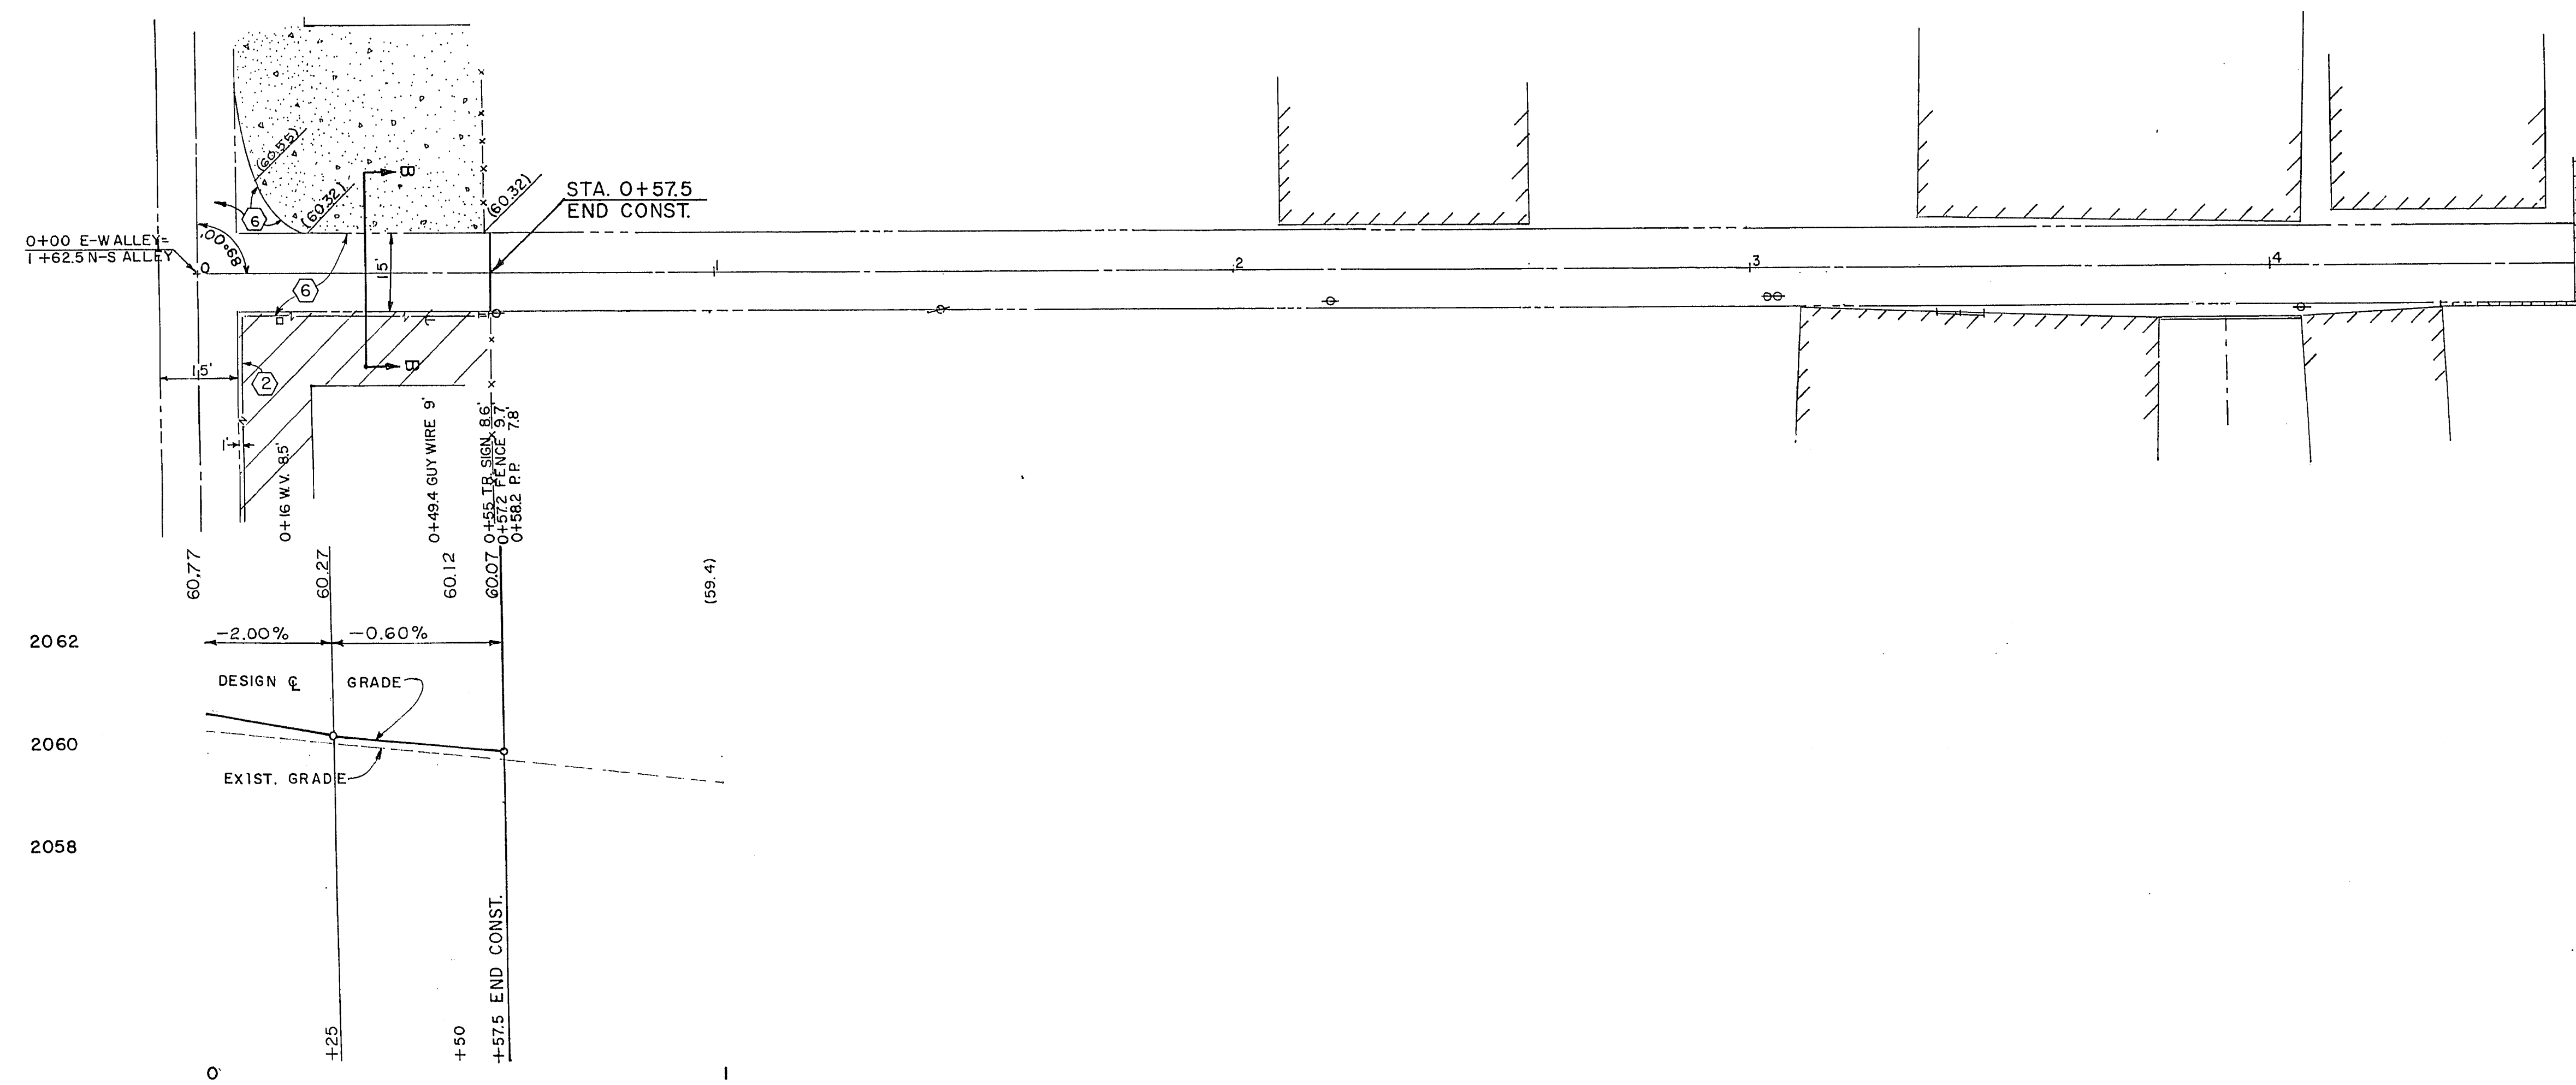


2062

2060


2058

CONSTRUCTION NOTES

- ① REMOVE ALLEY GUTTER
SAWCUT A. C. PAVEMENT &
REPAVE WITH 2" A.C.
- ②
- ⑤ CONSTRUCT ALLEY GUTTER PER C.L.V.
STD. DWG. 340.6.
- ⑥ CONSTRUCT BIT. FOG SEAL COAT OVER
2" A.C. PAV'T. OVER PRIME COAT OVER
2" TYPE II OVER 6" TYPE I PER C.L.V.
STD. DWG. 25.0.

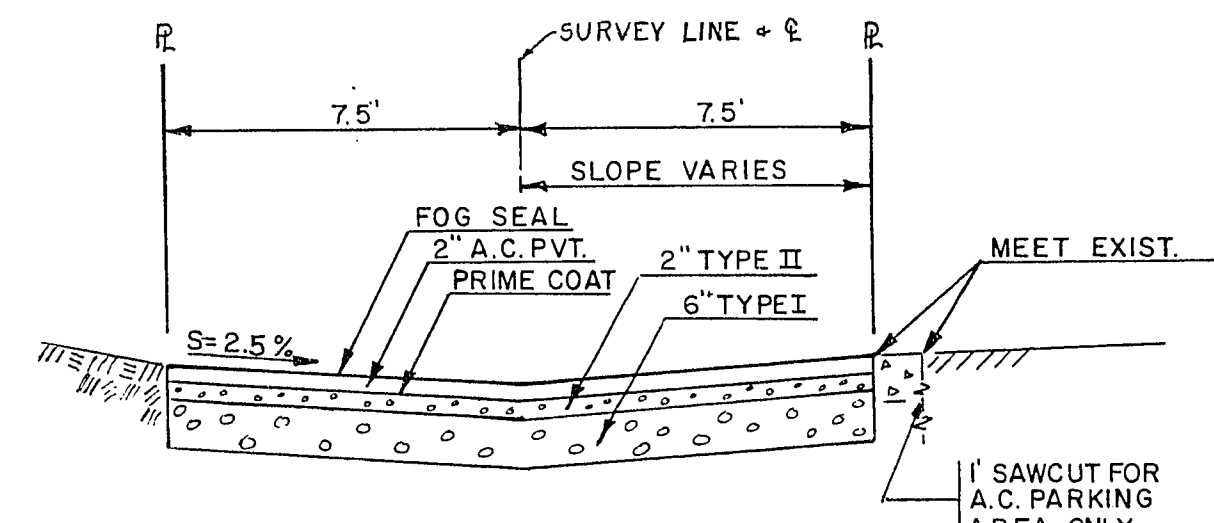

SECTION "A"-A"
SCALE: 1" = 4' HOR.
1" = 2' VERT.

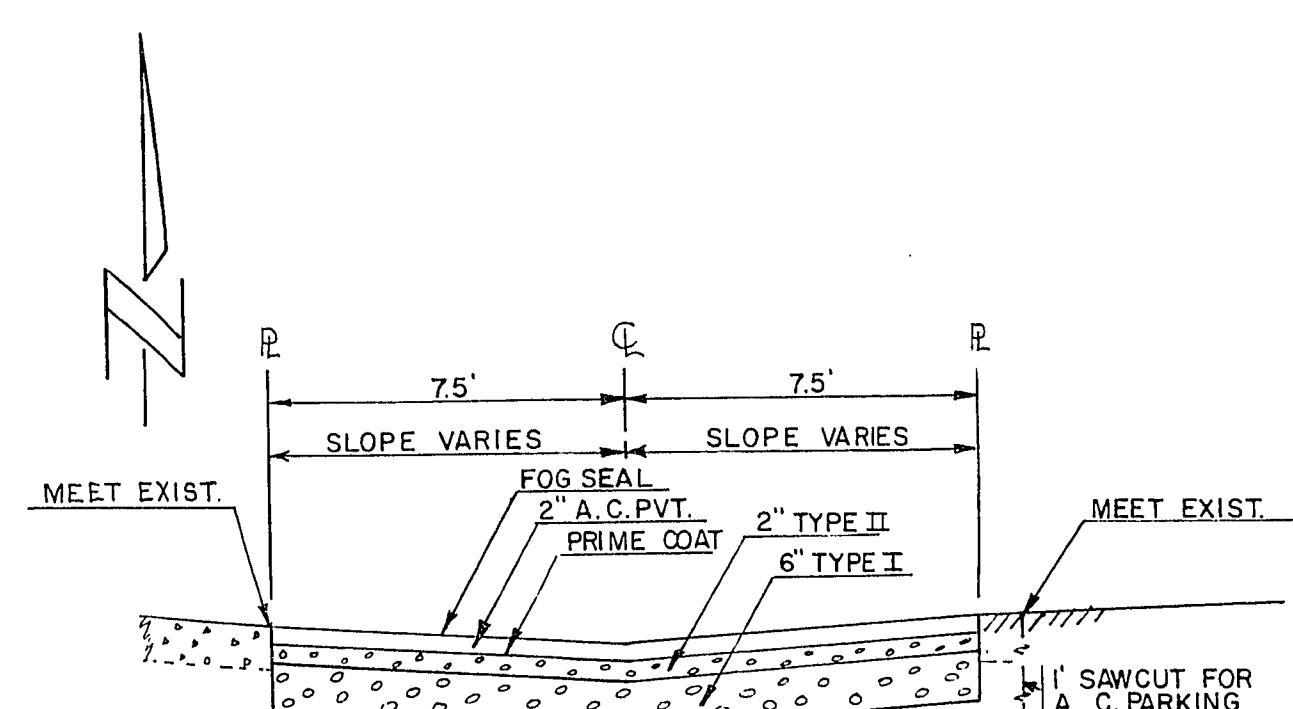

SECTION "B"-B"
SCALE: 1" = 4' HOR.
1" = 2' VERT.

APPROXIMATE QUANTITIES

CONST. NO.	ITEM	DESCRIPTION	UNIT	QUANTITY
①	200.110	REMOVE ALLEY GUTTER	S.F.	184
②	200.120	SAWCUT A. C. PAVEMENT	L.F.	256
	201.100	EXCAVATION	C.Y.	164
⑤	340.326	CONST. ALLEY GUTTER	S.F.	598
⑥	333.100	BIT. FOG SEAL COAT	GAL.	80
⑥	334.004	CONST. 2" A. C. PAVEMENT	TON	61
⑥	334.800	PRIME COAT	GAL.	160
⑥	302.200	TYPE II GRAVEL	C.Y.	41
⑥	302.100	TYPE I GRAVEL	C.Y.	88

CONTRACT
DRAWING
NOV 27 1972

CITY OF LAS VEGAS NEVADA ENGINEERING DEPT.		
"T" ALLEY - BALTIMORE TO BOSTON		
W.O. NO. 4077	DATE	SC. 1/11 "1" = 20'
DES. JAUBERT		SC. 1/11 "1" = 2'
DR. PATTERSON	AUG '72	F.B.K. NO. 62-5X
CKD.		P.O. NO.
APPROVED BY CITY ENGR.		DRAWING NO.
		108-V 204
		SHT. 1 OF 1