
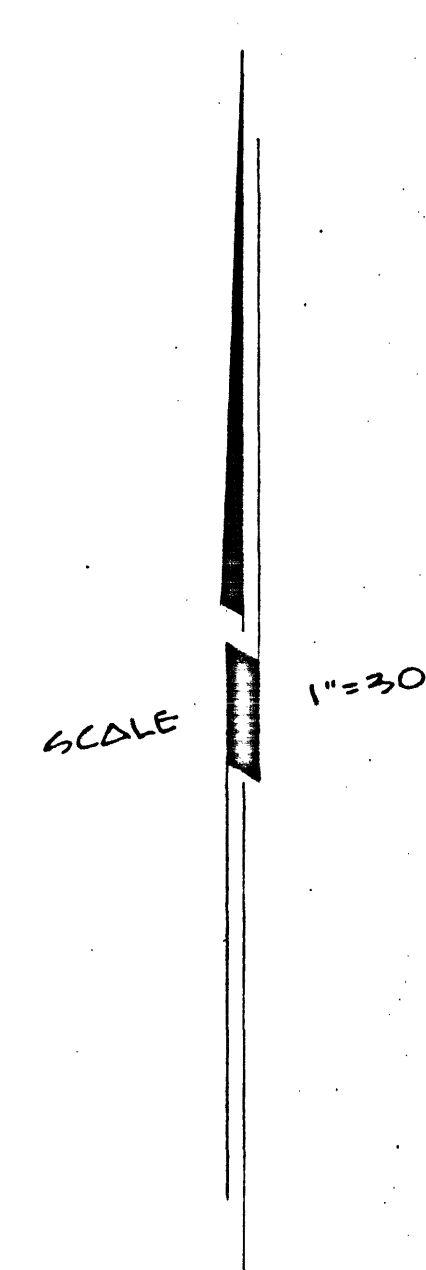


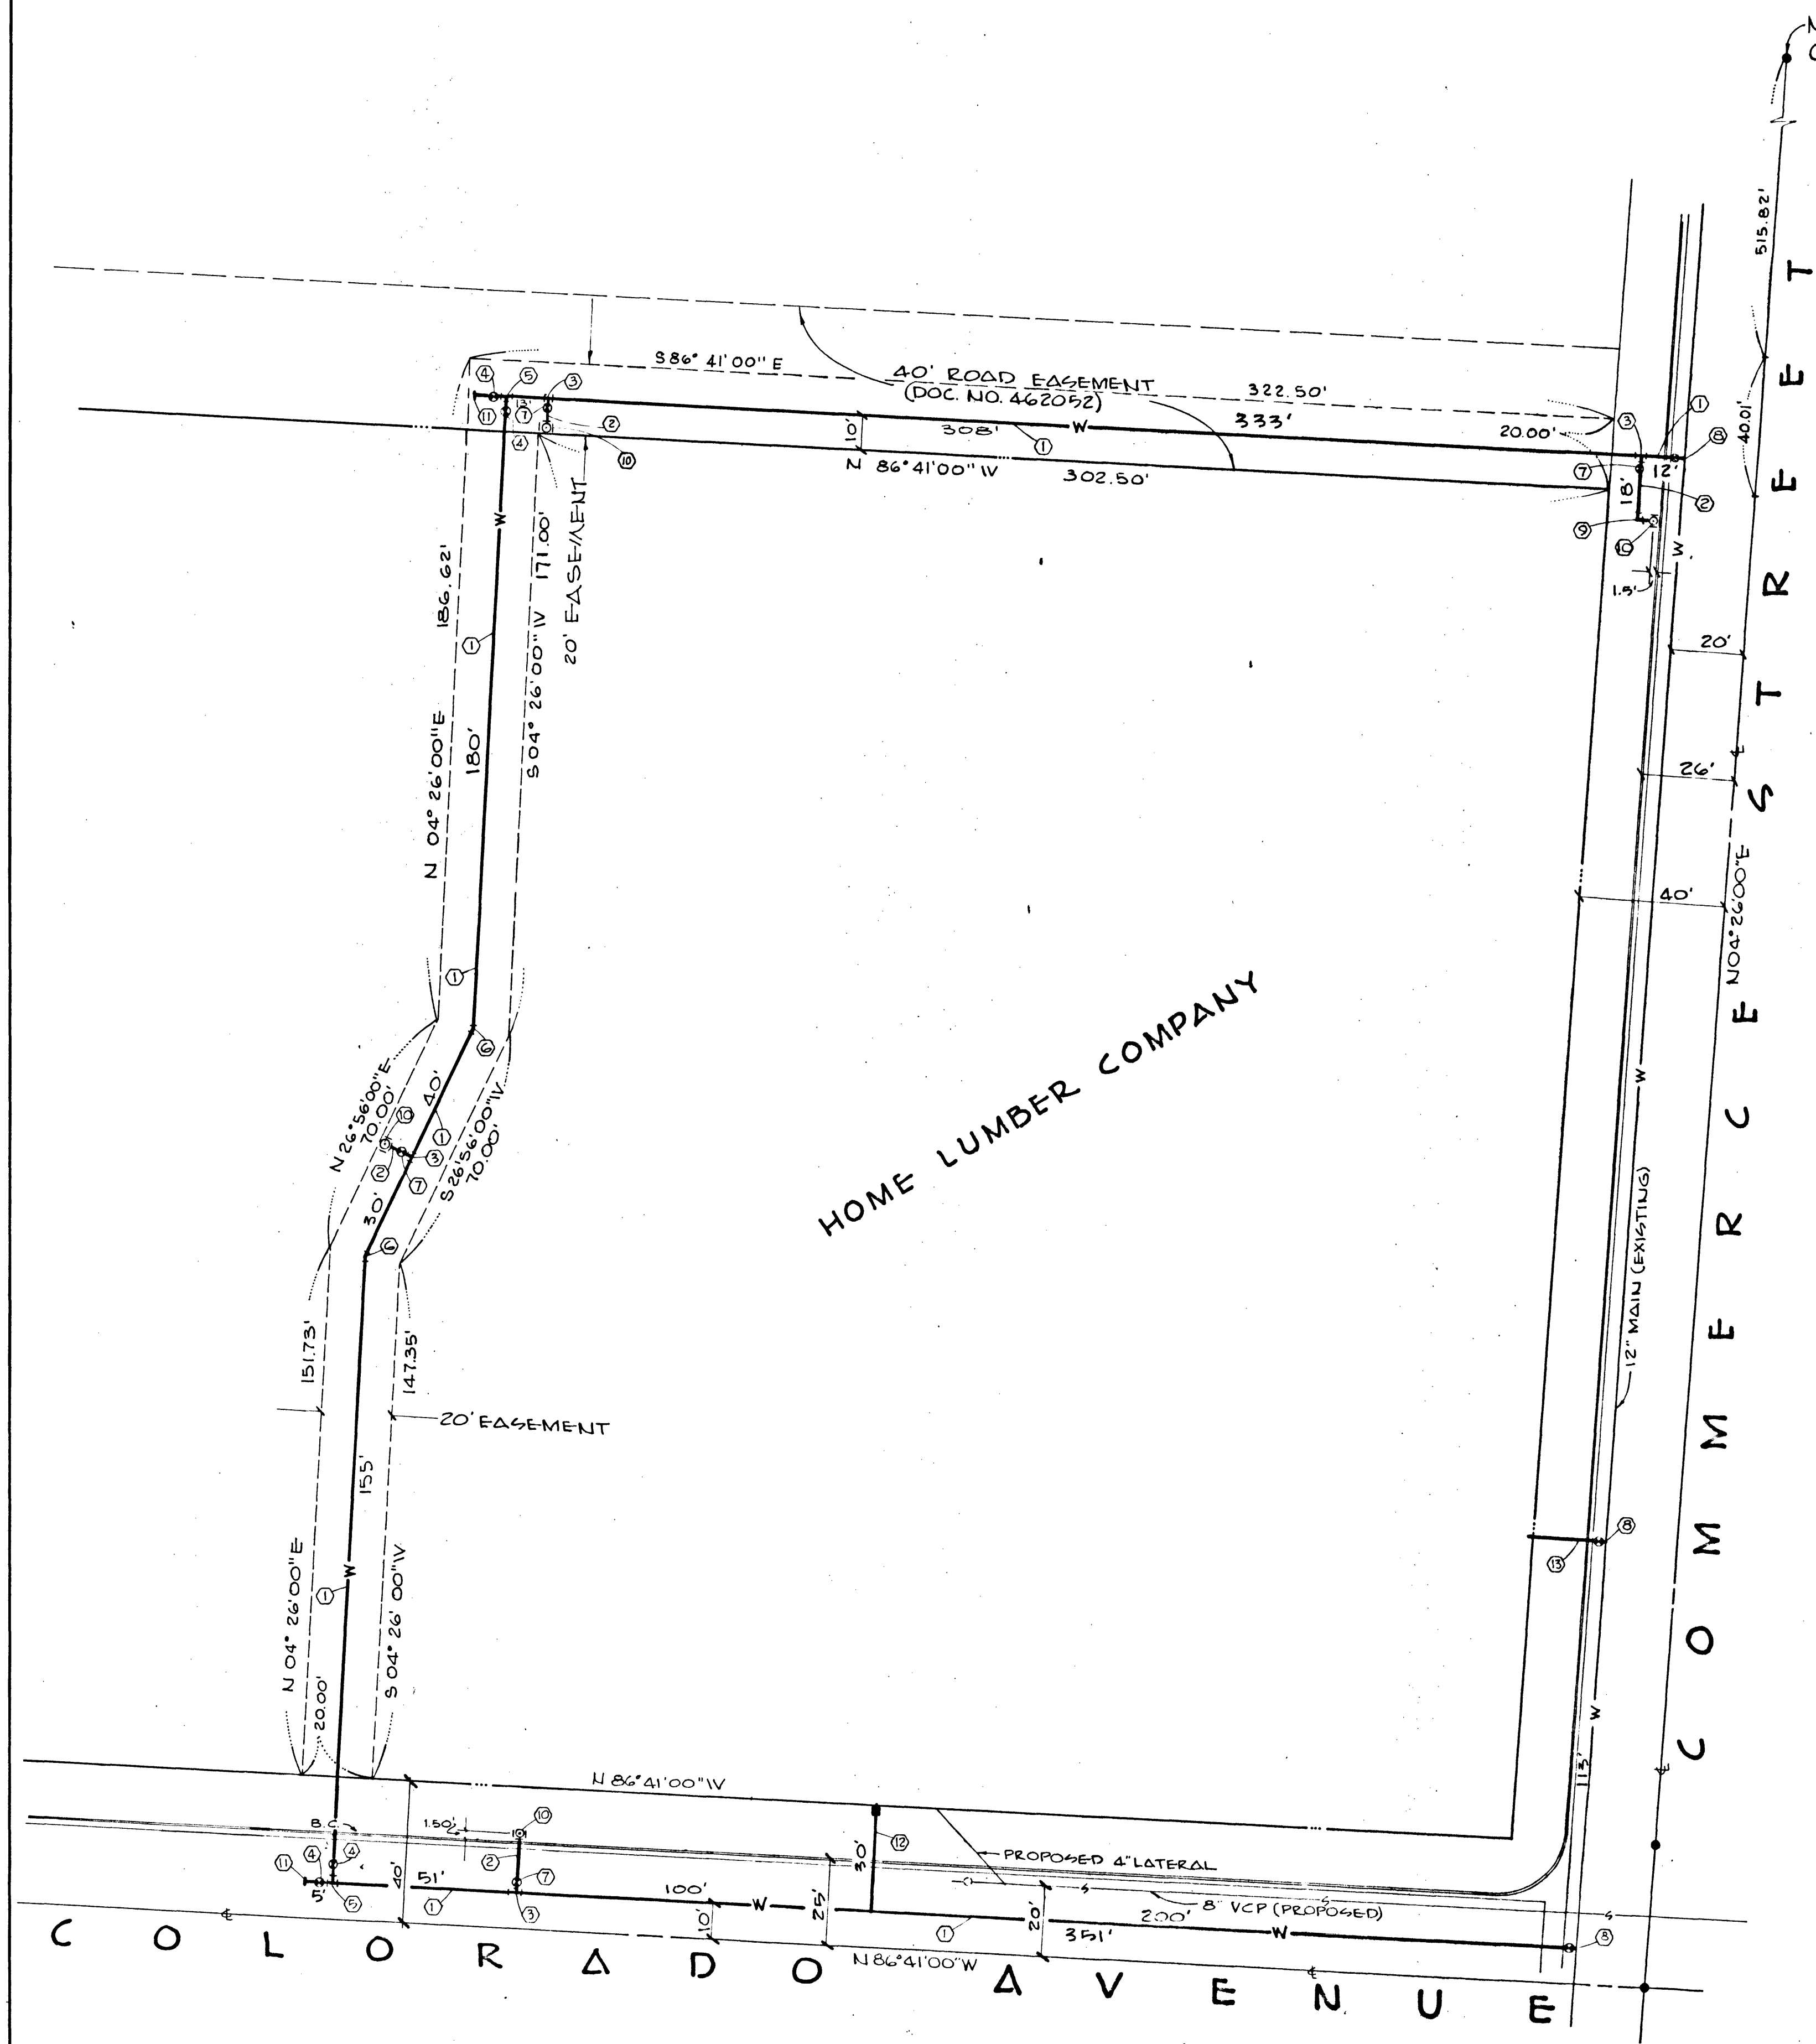

- NOTES:**
1. ALL CONSTRUCTION SHALL CONFORM TO THE LAS VEGAS VALLEY WATER DISTRICT STANDARD SPECIFICATIONS FOR DISTRIBUTION MAINS AND SERVICE CONNECTIONS.
 2. PRIOR TO BACKFILL ALL PIPE SHALL BE TESTED UNDER PRESSURE OF 200 PSI.
 3. EVIDENCE OF APPROVED EXCAVATIONS PERMIT MUST BE PRESENTED TO THE LAS VEGAS VALLEY WATER DISTRICT 48 HOURS PRIOR TO ACTUAL CONSTRUCTION.
 4. FIRE PROTECTION RATE = 6500 GPM

ESTIMATED QUANTITIES	
① 10" ACP	1090 LIN. FT.
② 6" ACP	50 LIN. FT.
③ 10" x 10" x 6" C.I. TEE	4 EA.
④ 10" NRS GATE VALVE W/ VALVE BOX	4 EA.
⑤ 10" x 10" x 10" C.I. TEE	2 EA.
⑥ 10" 22 1/2° ELBOW	2 EA.
⑦ 6" NRS GATE VALVE W/ VALVE BOX	4 EA.
⑧ 12" x 10" TAPPING SLEEVE & VALVE	3 EA.
⑨ 6" 90° ELBOW	1 EA.
⑩ FIRE HYDRANT	4 EA.
⑪ C.I. CAP & THRUST BLOCK	2 EA.
⑫ 1" COPPER LINE	30 LIN. FT.
⑬ 8" ACP	20 LIN. FT.

10" WATER MAIN THE HOME LUMBER COMPANY	LEAVITT & ASSOCIATES CIVIL ENGINEERS • MINING ENGINEERS • LAND SURVEYORS 536 EAST SARAZA AVENUE 702 735-0230	APPROVALS		REVISIONS		
		City Engineer Signature CITY ENGINEER		City Fire Chief Signature CITY FIRE CHIEF		
		LAS VEGAS VALLEY WATER DISTRICT		DATE		
		SCALE 1" = 30'		DATE		
		CHECK		DATE		

21-31

