


APPROVALS:

Ed J. J. J.
Las Vegas City Engineer
2-19-74
Date

J. D. Rubin
Las Vegas Field Engineer
2-4-74
Date


Sam Cohen
Las Vegas Fire Department
1-29-74
Date

M. J. J.
Las Vegas Valley Water District
5/17/74
Date

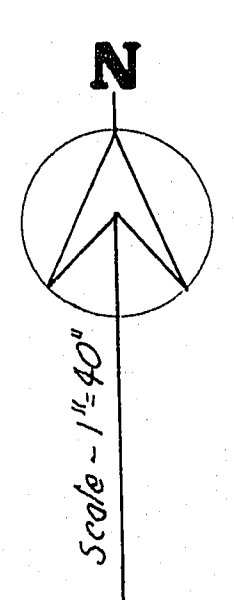

GENERAL NOTES:

- All work to conform to the LAS VEGAS VALLEY WATER DISTRICT standard specifications 5-1.
- All work, except as modified herein, shall be done in accordance with CLARK COUNTY standard specifications.
- Notice to be given engineering department of the LAS VEGAS VALLEY WATER DISTRICT 48 hours prior to actual construction.
- Service saddles or tapped collars will be required on all services.
- Contractor to provide thrust blocks as required.
- All lines to be pressure tested to 200 p.s.i.
- All flanged fittings to be coated with EC-244 and wrapped with 10-mil thick polyethylene.
- Parallel sewer and water lines shall have a minimum of 10' horizontal separation and 3' minimum vertical separation on all water lines.
- Deflection angle shall not exceed 5° per 13 foot section of pipe for pipe size smaller than 10\"
- All valve boxes shall have concrete collars at surface of paved areas.
- No other utility lines may be placed in same trench with water lines.
- Contractor shall verify locations of existing water lines prior to construction.
- Existing utilities shown are located by the best information available to the engineer at the time these plans were prepared.
- The contractor shall contact the appropriate utility company, 48 hours prior to construction.
- No fire hydrant shall be located within 6' of any driveway, power pole, light standard or any other obstruction.

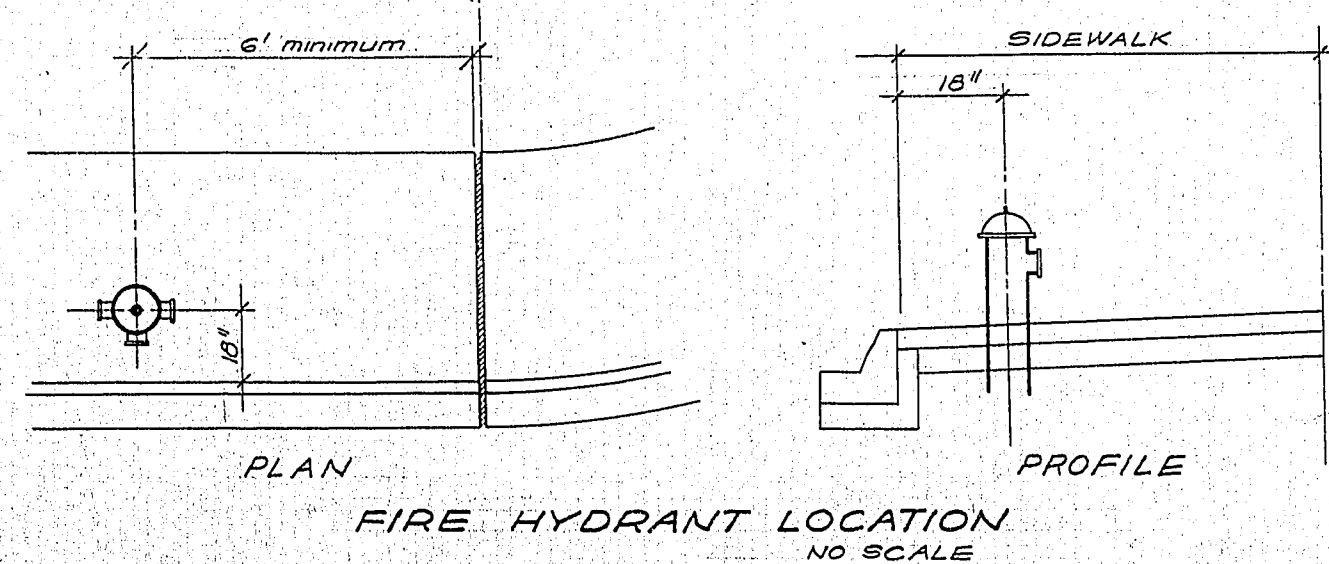


Estimated Quantities

ITEM	QUANTITY
8\"	1 each
6\"	9 each
6\"	3 each
FIRE HYDRANT	6 each
6\"	15 each
6\"	2,691 L.F.
8\"	649 L.F.
3/4\"	64 each
8\"	2 each

REVISIONS		
NO.	DESCRIPTION	DATE

Name of Plan: Valley West Unit 2 p. 18
Water plan as shown will be acceptable. It is NOT approved for construction.
M. J. J. 2/15/74
Date

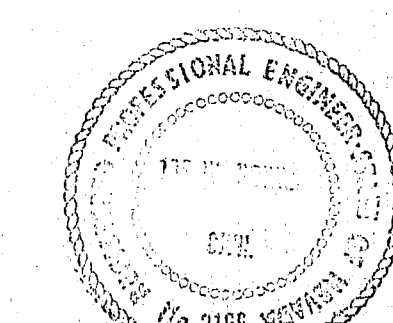

WATER PLAN
VALLEY WEST, UNIT NO. 2
LAS VEGAS, NEVADA

CONSULTING ENGINEERS/PLANNERS
SPARKS, NEVADA - SEATTLE, WASHINGTON - LAS VEGAS, NEVADA

JOB NO. 273076
DESIGNED
DRAWN
COMP.
CHECKED <i>[initials]</i>
DATE NOV. 5, 73
SHEET NO. 18
OF 19 SHEETS

567 y. 3170-2-12 XC1142