
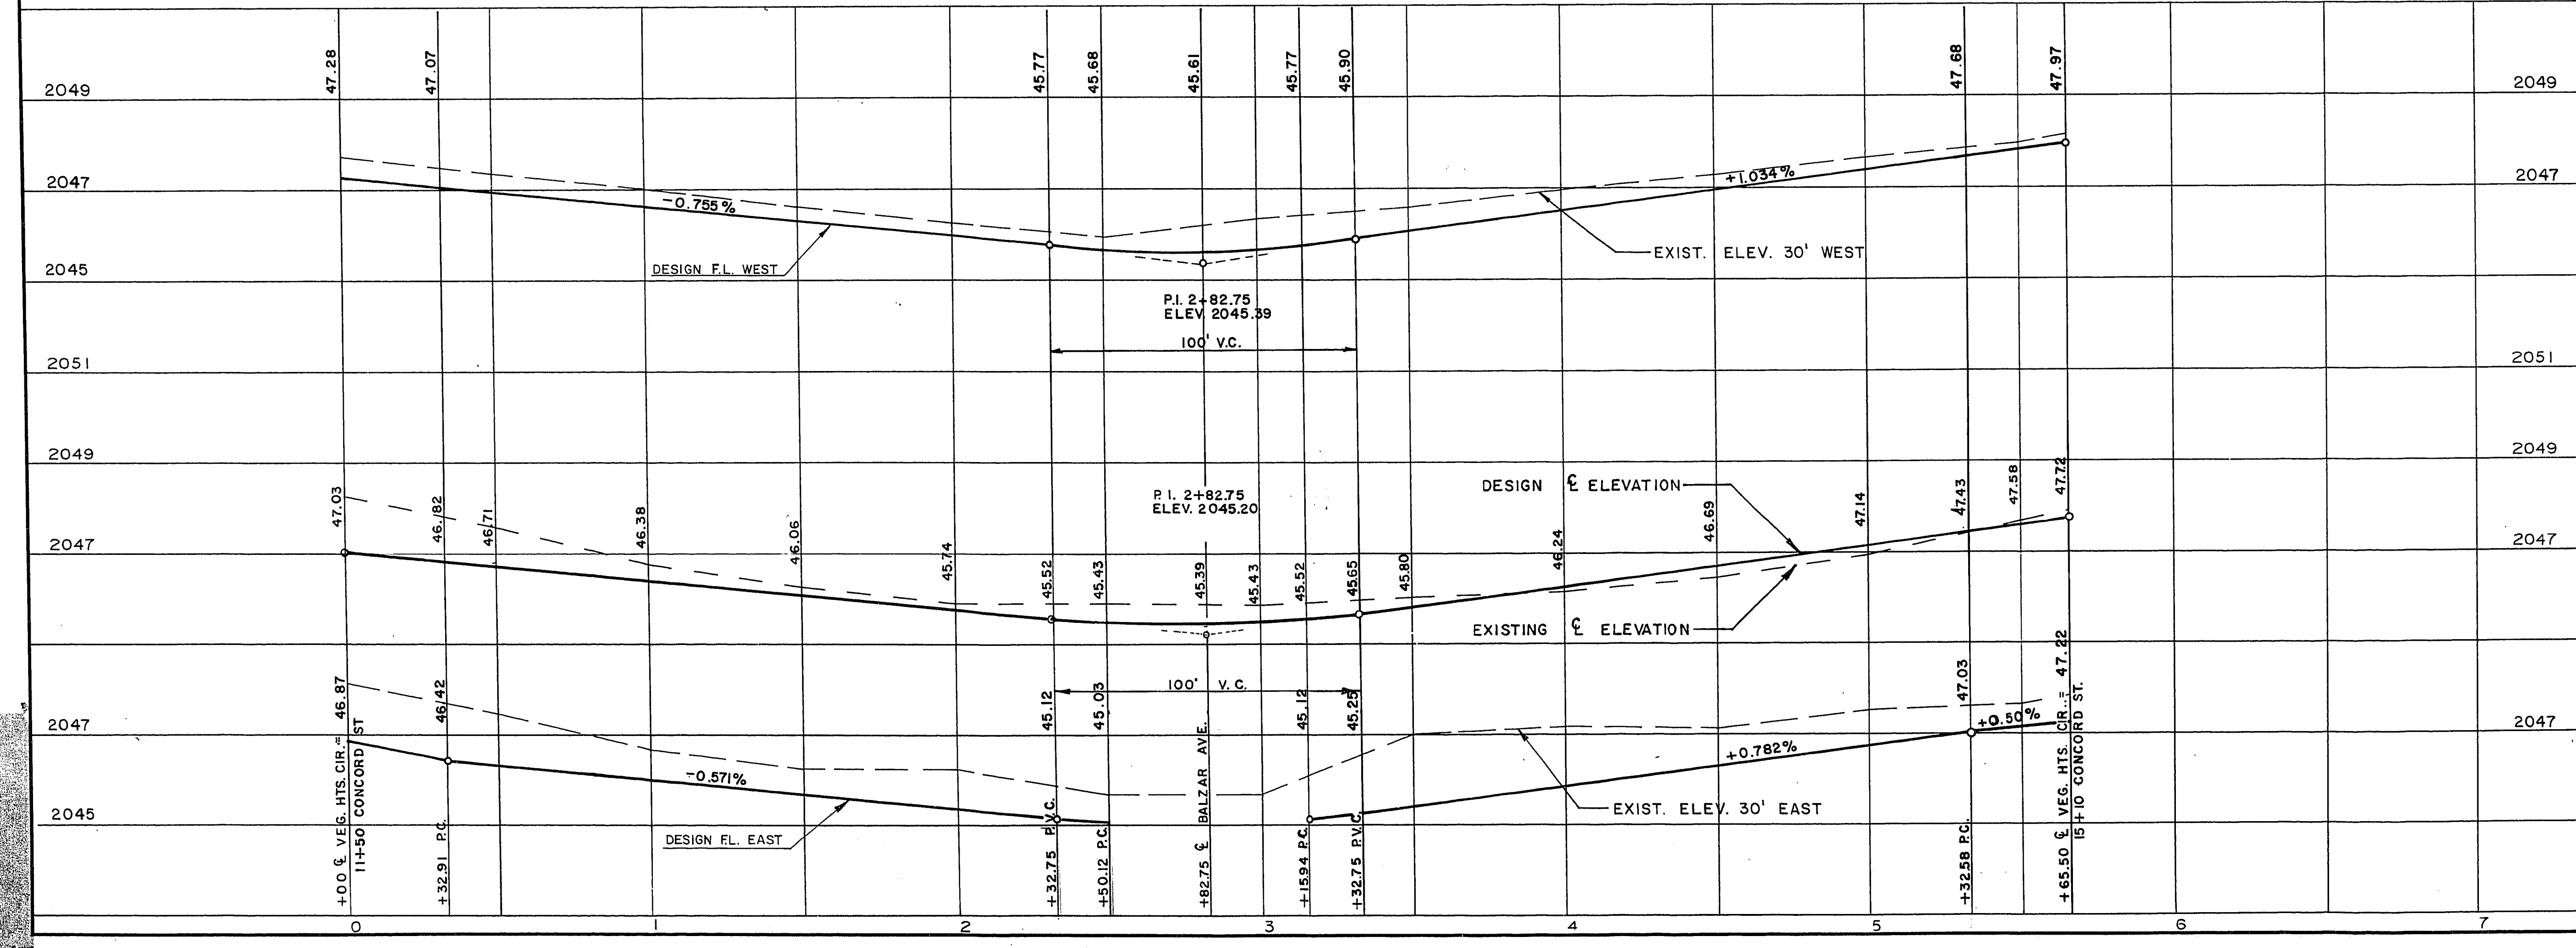


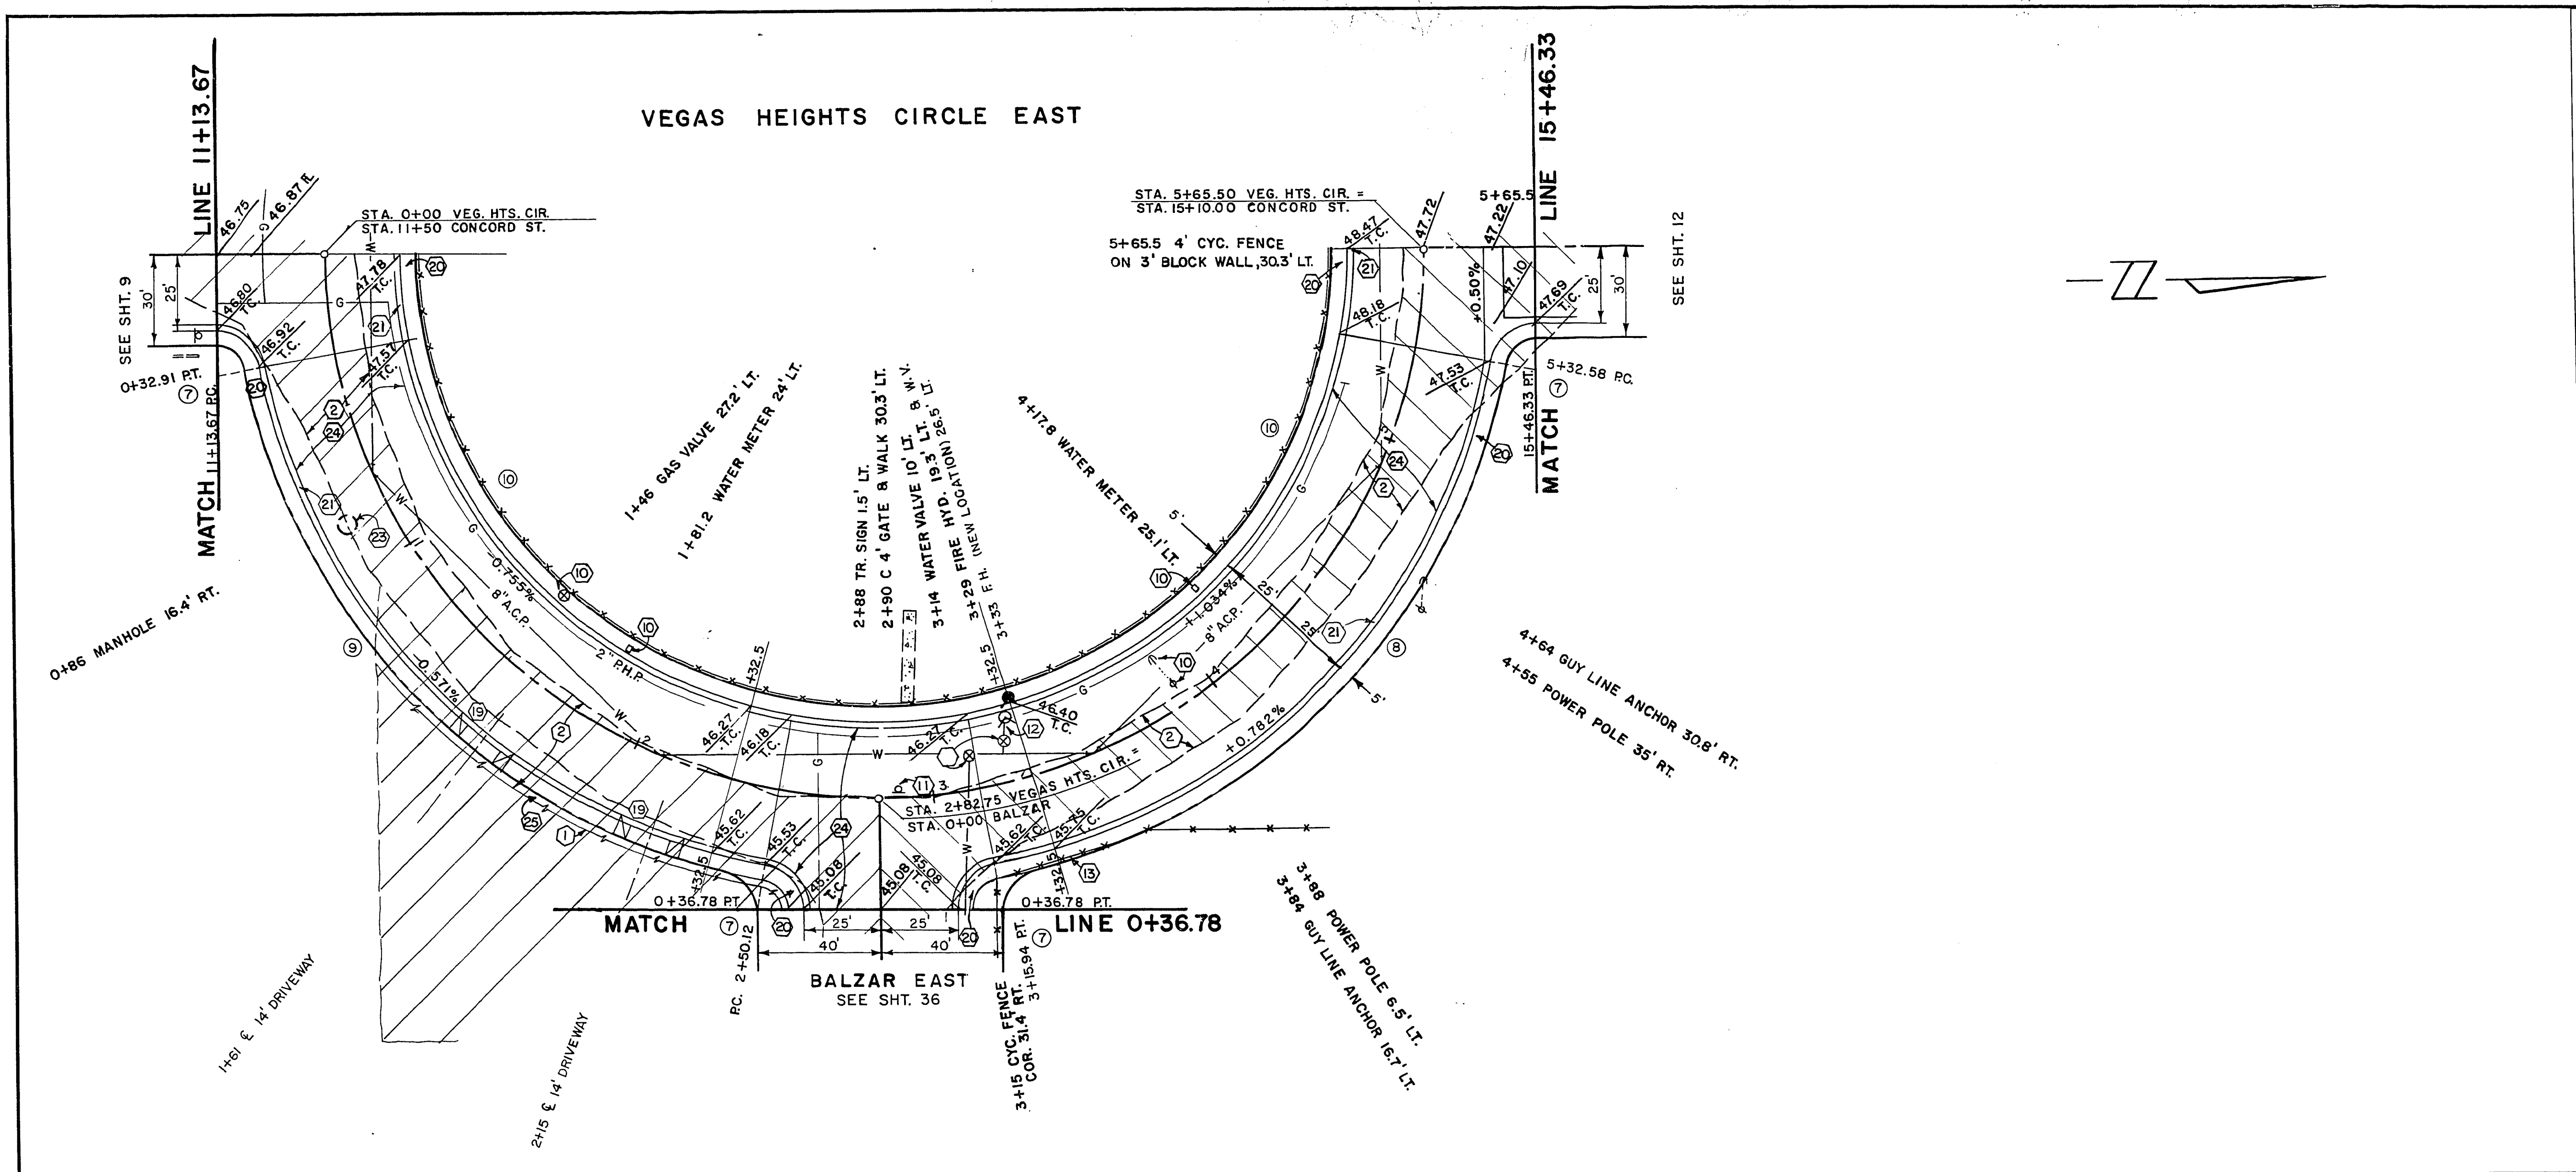

APPROXIMATE QUANTITIES THIS SHEET

ITEM	DESCRIPTION	CONST. NOS.	C.L.V.	S. I. D.	TOTAL	UNIT
201.1001	EXCAVATION		237	239	476	CY
201.1004	REMOVE A.C. PAVEMENT		1800	147	165	LF
201.1002	REMOVE A.C. PAVEMENT		1800	147	1947	SY
201.1006	REMOVE WOOD FENCE		60	60	60	LF
560.200	REMOVE & RELOCATE F.H.		1	1	1	EA
340.216	RESIDENTIAL DRIVEWAY		308	308	308	SF
340.114	CONCRETE SIDEWALK		1000	5023	5023	SF
340.014	'L' TYPE CURB AND GUTTER (24IN)		240	240	1000	LF
340.319	VALLEY GUTTER		2	2	240	SF
340.319	ADJUST SEWER MANHOLE		1061	1061	2	EA
354.112	6 INCH ASPHALT CONCRETE PAV.T.		455	4	1061	TN
354.103	1 1/2" A.C. PAVEMENT SINGLE-LIFT		455	7	462	GL
355.100	BITUMINOUS FOG SEAL		38	18	462	EA
360.100	ADJUST WATER VALVE BOX		93	93	56	CY
302.100	TYPE 1 GRAVEL BASE		93	93	93	CY
302.200	TYPE 1 1/2 GRAVEL BASE					

PROFESSIONAL ENGINEER
WILLIAM J. PURVIS
CIVIL
No. 3338
8/1/74

CONTRACT
DRAWING
JUN 27 1975

BM NO. 06121012 RIVET IN PLATE
SE COR. LAKE MEAD & "J" ST.
ELEV. 2044.69'

NO.	DESCRIPTION	BY	DATE	APPROVAL
REVISIONS				

CITY OF LAS VEGAS
CLARK COUNTY, NEVADA

Department of Public Works
Engineering Division

VEGAS HEIGHTS
CIRCLE - EAST

STA. 0+00 TO STA. 5+65.5

scale (h) 1" = 30' scale (v) 1" = 2'
w.o.no. 4171 f.bk.no. 73-6X drawing no. **SID 417**
design by W. L. JAUBERT drawn by date 10 APR. 74
approved by Director of Public Works date 6-10-74 sht. 11 of 63

107V-924 21-4-68