


APPROXIMATE QUANTITIES THIS SHEET

ITEM	DESCRIPTION	CONST. NOTE NOS.	C.L.V.	S.I.D.	TOTAL	UNIT
201.1001	EXCAVATION	(1)	60		60	CY
201.1004	SAWCUT A.C.	(2)	365		365	LF
201.1002	REMOVE A.C. PAVEMENT	(3)	1849		1849	SY
201.1003	REMOVE A.C. CURB	(4)	110		110	LF
200.300	REMOVE TREE (4" IN - 10" IN)	(5)	3		3	EA
200.400	REMOVE TREE (OVER 10" IN.)	(6)	4		4	EA
560.200	RELOCATE FIRE HYDRANT	(7)	1		1	EA
201.1006	REMOVE WOOD FENCE	(8)	581		581	LF
340.216	RESIDENTIAL DRIVEWAY	(9)	420		420	SF
340.114	CONCRETE SIDEWALK	(10)	4751		4751	SF
340.014	"L" TYPE CURB AND GUTTER (24" IN)	(11)	919		919	LF
340.319	VALLEY GUTTER	(12)	501		501	SF
334.112	6" INCH ASPHALT CONCRETE PAV. T.	(13)	1004		1004	TN
334.004	2" IN. A.C. PAVEMENT SINGLE-LIFT	(14)	95		95	TN
333.100	BITUMINOUS FOG SEAL	(15)	551		551	BL
334.800	BITUMINOUS PRIME COAT	(16)	241		241	BL
302.100	TYPE I GRAVEL BASE	(17)	173		173	CY
302.200	TYPE II GRAVEL BASE	(18)	91		91	CY
334.912	ASPHALT CONCRETE CURB	(19)	99		99	LF
560.060	ADJUST WATER VALVE BOX	(20)	6		6	EA

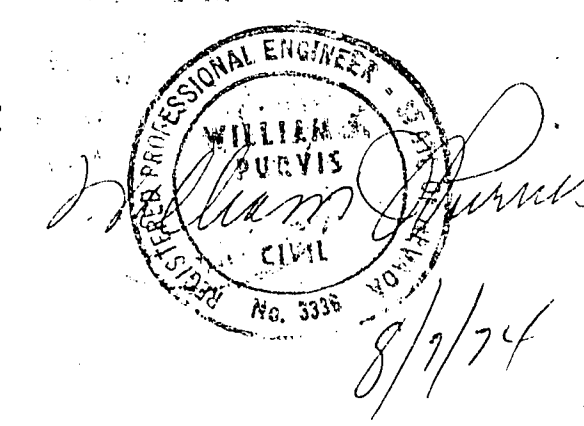

CONTRACT DRAWING
JUN 27 1975

BM NO. 06121012 RIVET IN PLATE
S.E. COR. LAKE MEAD & "J" ST.
ELEV. 2044.69'

NO.	DESCRIPTION	BY	DATE	APPROVAL
REVISIONS				

Department of Public Works
Engineering Division
VEGAS HEIGHTS
CONCORD STREET
 STA. 0+00 TO STA. 6+00

scale (h) 1" = 30'	scale (v) 1" = 2'	drawing no. SID 417
w.o.no. 4171	f.bk.no. 73-6X	date 10-APR. 74
design by W.L. JAUBERT	drawn by	approved by Director of Public Works
date 6-20-75	sht. 8 of 63	