
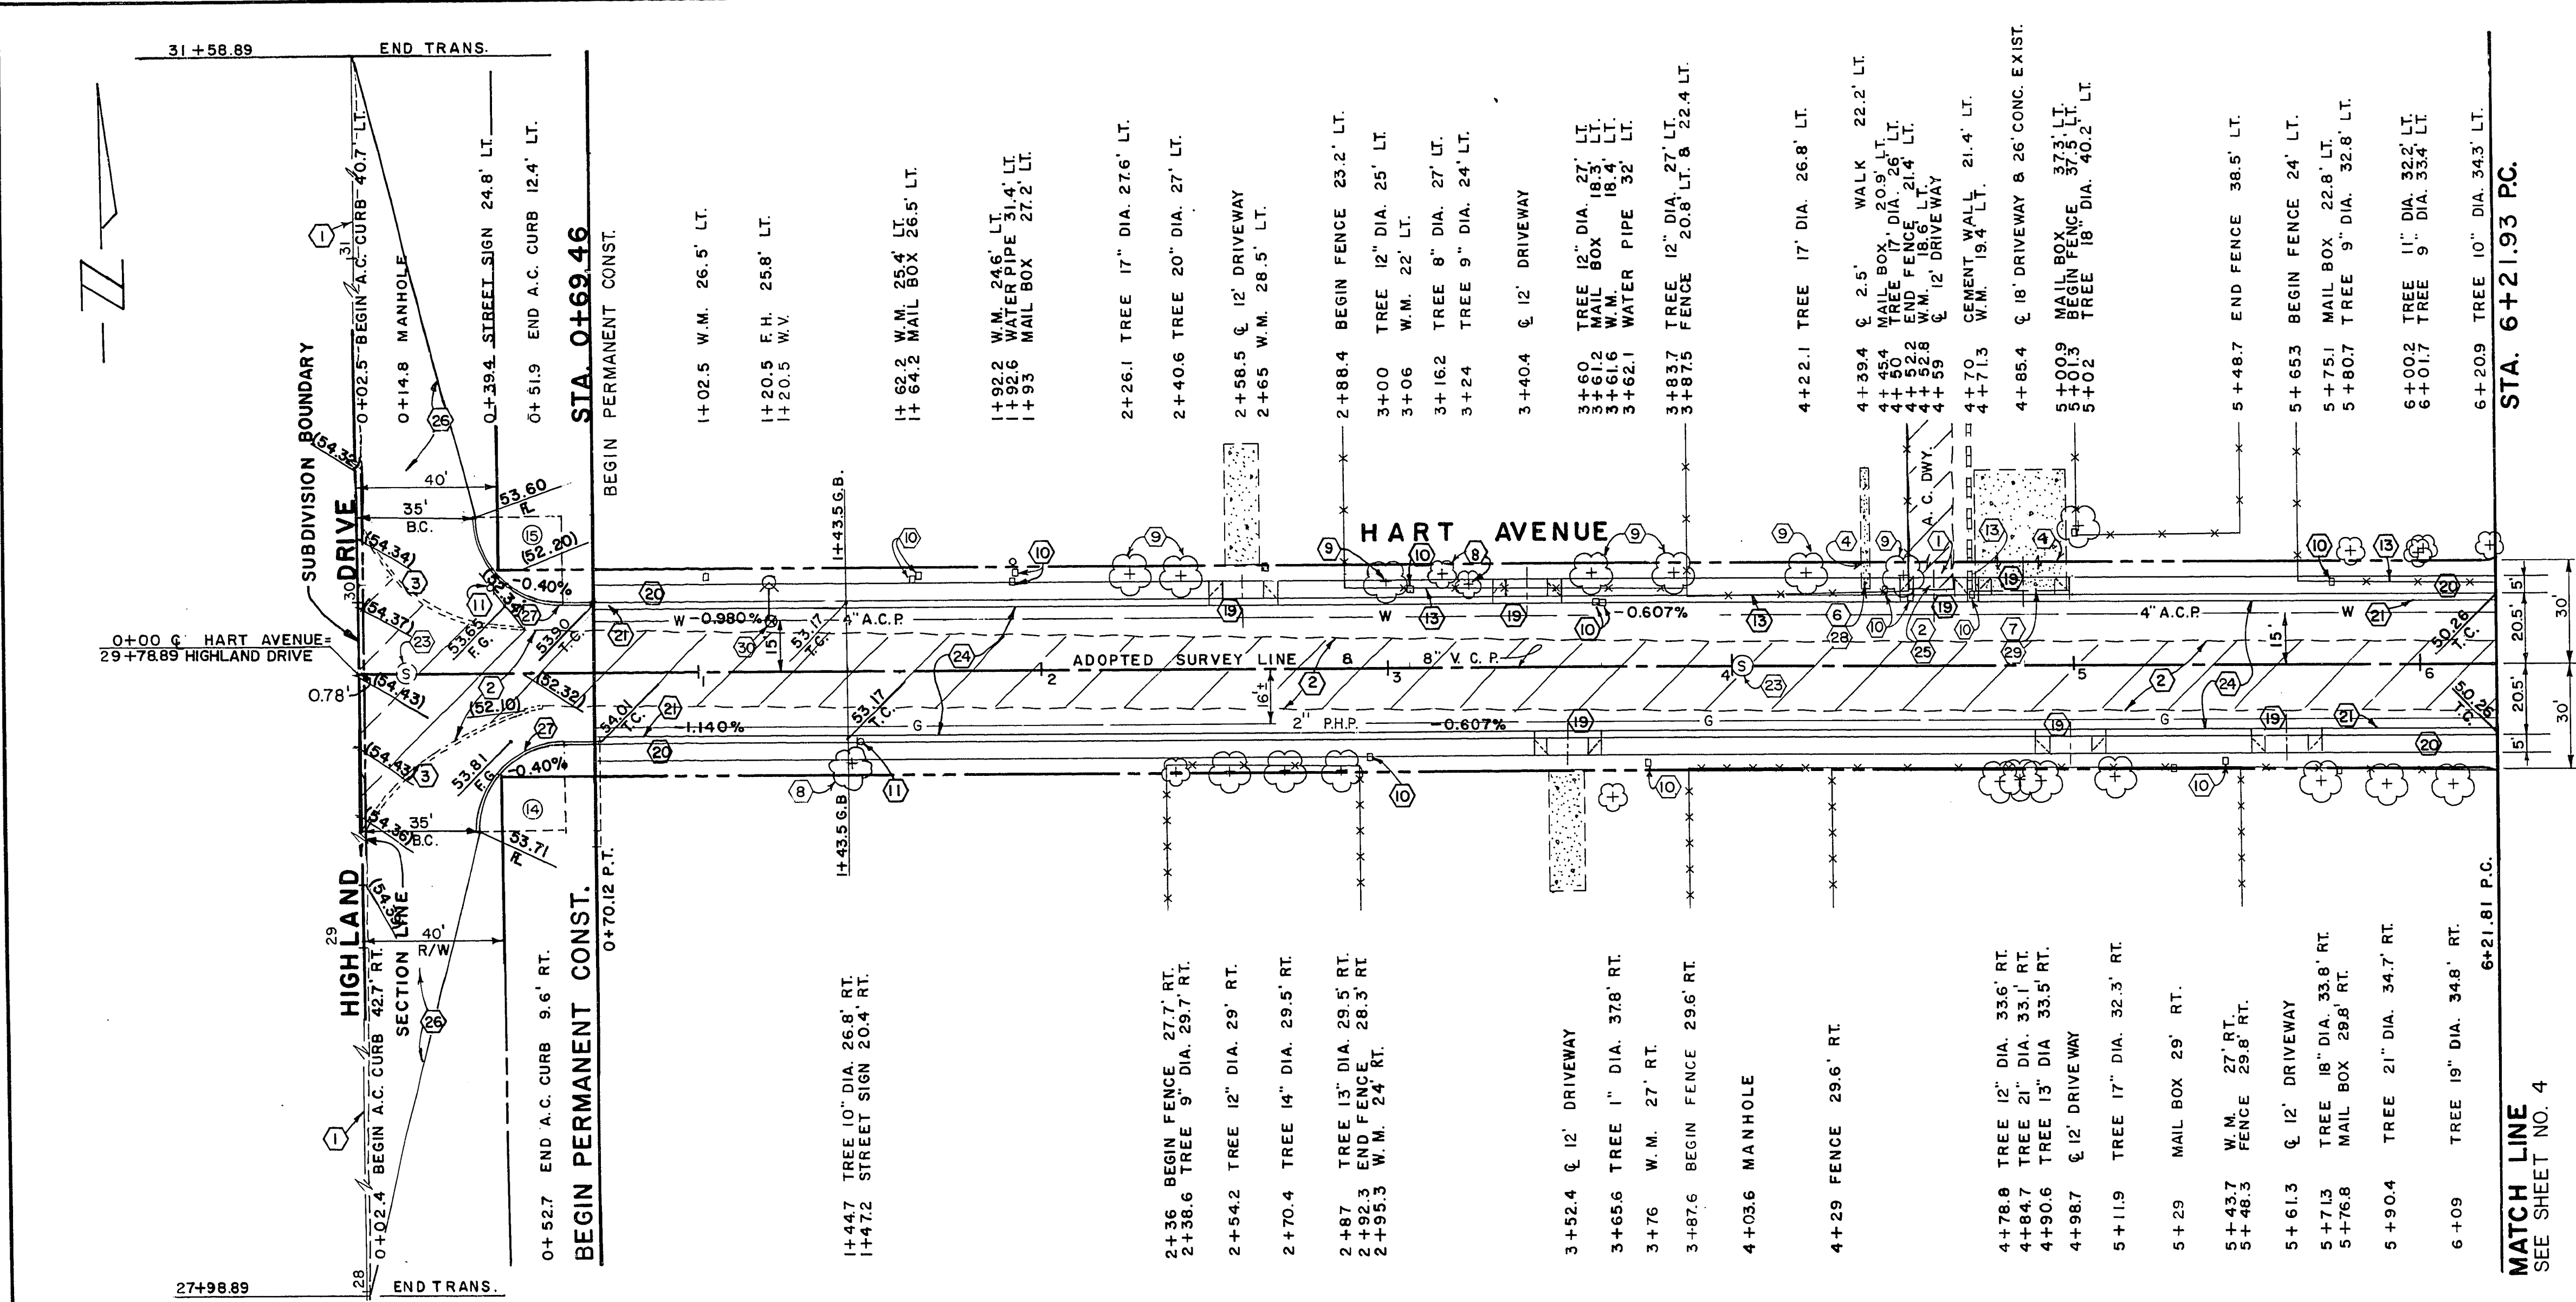


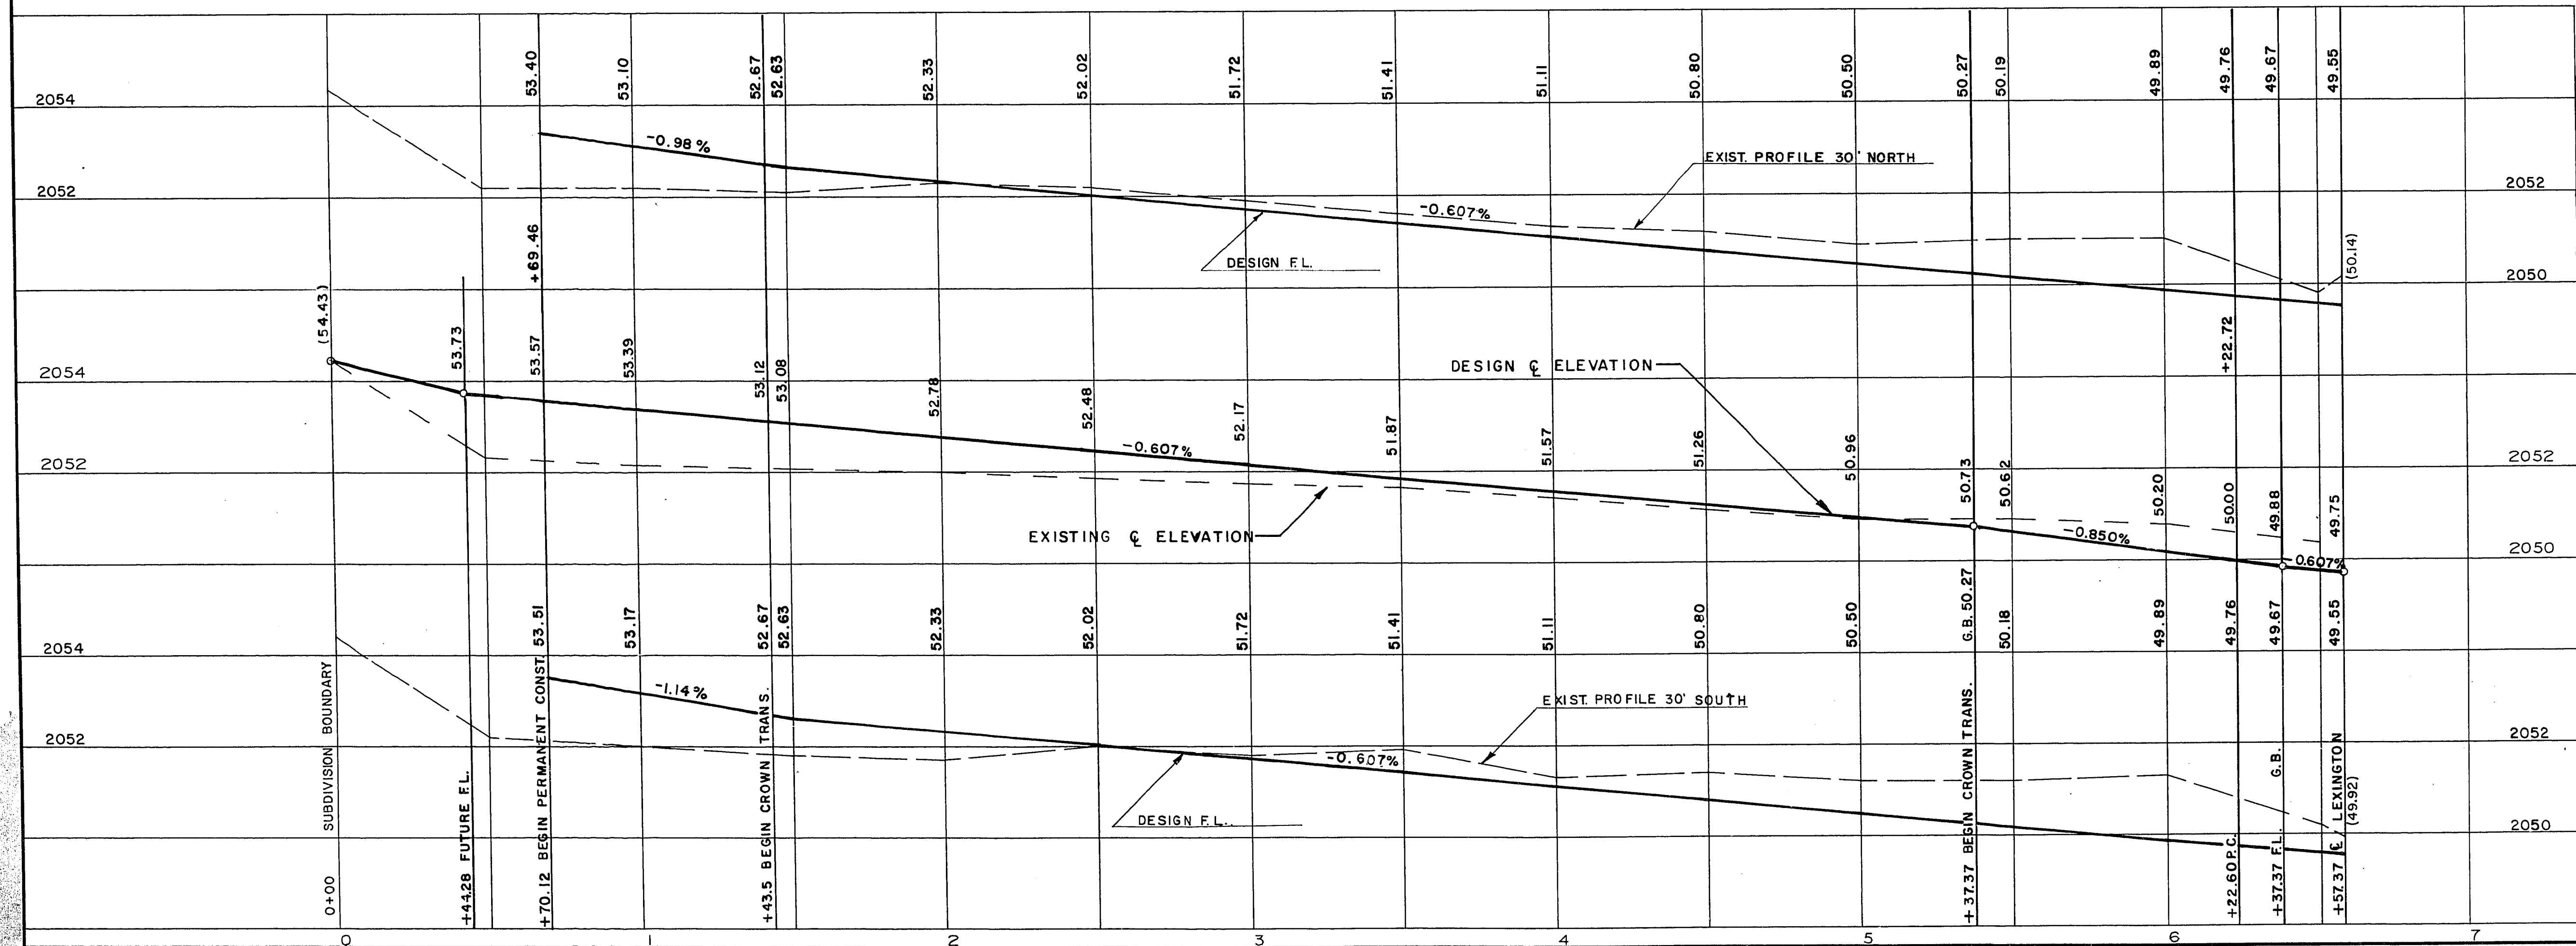

APPROXIMATE QUANTITIES THIS SHEET					
ITEM	DESCRIPTION	CONST. NOTE NO.	C.L.V.	S.I.D.	TOTAL
201.1001	EXCAVATION	1	341	102	443
201.1004	SAWCUT A.C.	2	363	14	377
201.1002	REMOVE A.C. PAVEMENT	3	1128	12	1140
201.1003	REMOVE A.C. CURB	4	130	29	130
201.1100	SAWCUT CONCRETE	5	20	20	20
201.1105	REMOVE CONCRETE SIDEWALK	6	221	3	221
201.1108	REMOVE CONCRETE DRIVEWAY-RESIDEN	7	221	3	221
201.300	REMOVE TREE (4 IN - 10 IN)	8	7	7	7
201.400	REMOVE TREE (OVER 10 IN.)	9	312	312	312
201.1006	REMOVE WOOD FENCE	10	1	1	1
560.050	ADJUST WATER VALVE BOX	11	117	117	117
340.124	PRIVATE CONCRETE DRIVEWAY-TRANS.	12	11	11	11
340.134	PRIVATE CONCRETE WALKWAY-TRANS.	13	1022	1022	1022
340.216	RESIDENTIAL DRIVEWAY	14	4791	4791	4791
340.114	CONCRETE SIDEWALK	15	960	960	960
340.014	1" TYPE CURB AND GUTTER (24 IN)	16	796	796	796
512.500	6 INCH ASPHALT CONCRETE PAV. T.	17	1	1	1
334.003	1 1/2 IN AC PAVE S.L.	18	127	127	127
334.004	2 IN AC PAVE S.L.	19	504	504	504
334.100	BITUMINOUS FOG SEAL	20	325	325	325
302.100	TYPE 1 GRAVEL BASE	21	217	217	217
334.912	ASPHALT CONCRETE CURB	22	98	98	98

BM NO. 06121BI RIVET IN PLATE NW
CORNER LAKE MEAD & HIGHLAND
ELEV. 2052.70

NO.	DESCRIPTION	BY	DATE	APPROVAL

REVISIONS

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

VEGAS HEIGHTS
HART AVENUE
STA. 0+00.00 TO STA. 6+22.72

W.O. NO. 4171	F.B.K. NO. 73-3Xq	DATE	DRAWING NO.
SC.(H) 1" = 30'	SC.(V) 1" = 2'		SID 417
DR. W. L. JAUBERT		10, APR. 74	FILE NO.

APPROVED BY DIRECTOR OF PUBLIC WORKS

6-20-76

SHEET 22 OF 63