
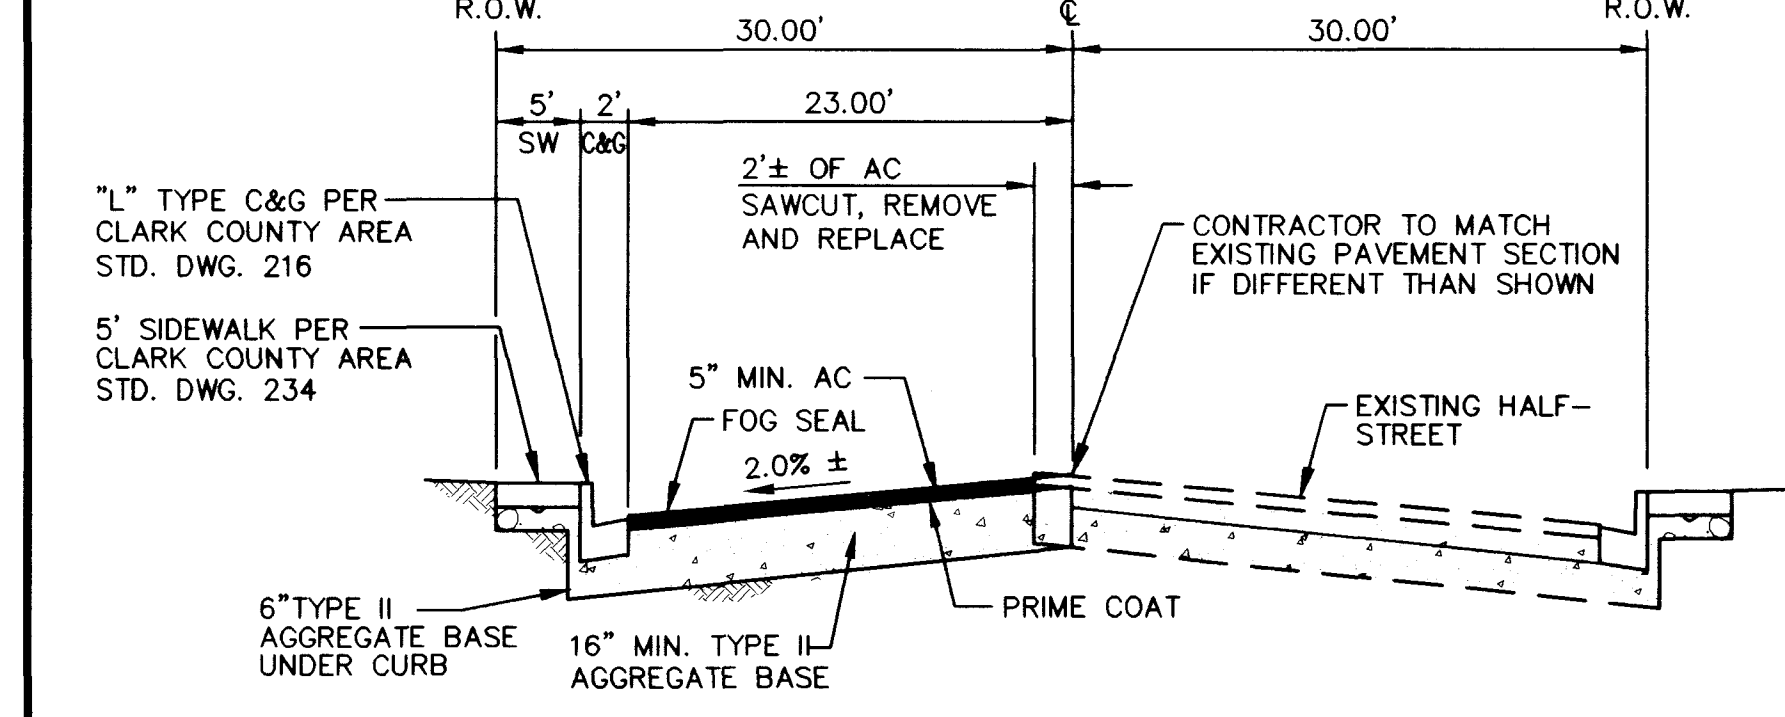


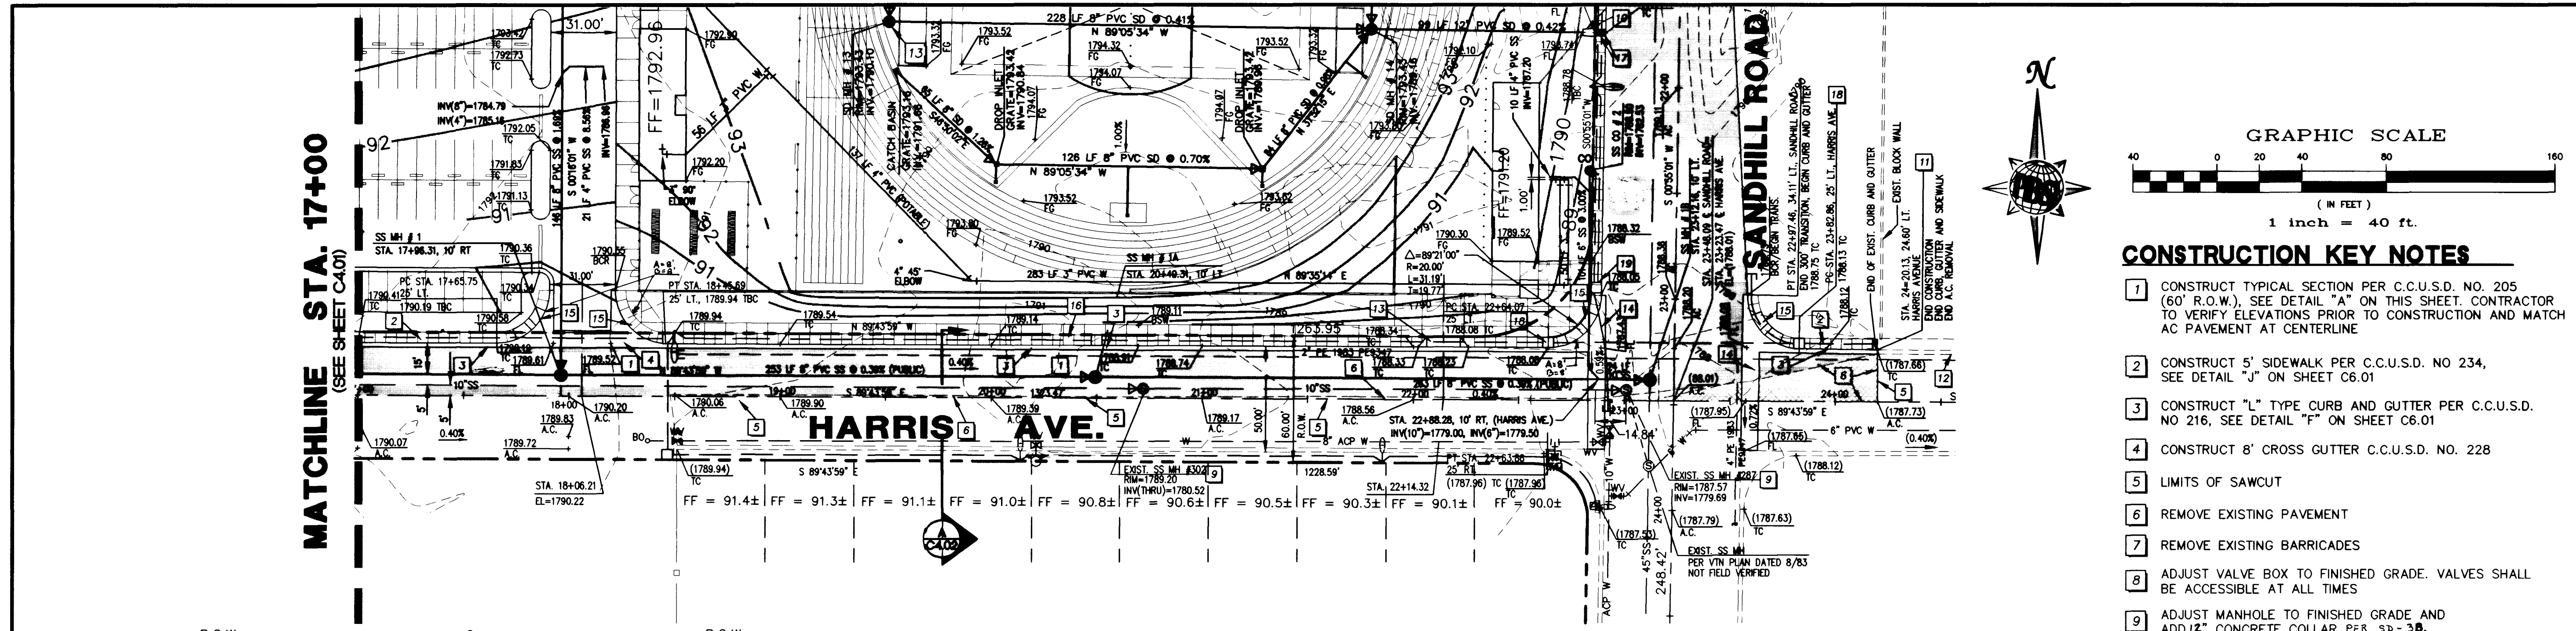

LEGEND

EXISTING A.C. TO BE REMOVED


PROPOSED A.C.

NOTE

SEE SHEET C4.01 FOR CONSTRUCTION KEY NOTES.



NOTES:

1. A.C. PAVEMENT TO BE 1/2" MAXIMUM ABOVE LIP OF GUTTER AFTER COMPACTION.
2. THE GRADE BREAK OCCURRING IN THE CROSS SECTION SHALL FALL BETWEEN DRIVING LANES.
3. STRUCTURAL SECTION SHOWN IS BASED ON A SUBGRADE "R" VALUE OF 20. OTHER STRUCTURAL SECTIONS MAY BE REQUIRED BASED ON ENGINEERING ANALYSIS OF "R" OR "CBR" VALUES DETERMINED BY SOIL TESTING.
3. FOR ADDITIONAL INFORMATION REFER TO CLARK COUNTY AREA STD. DWG. 205

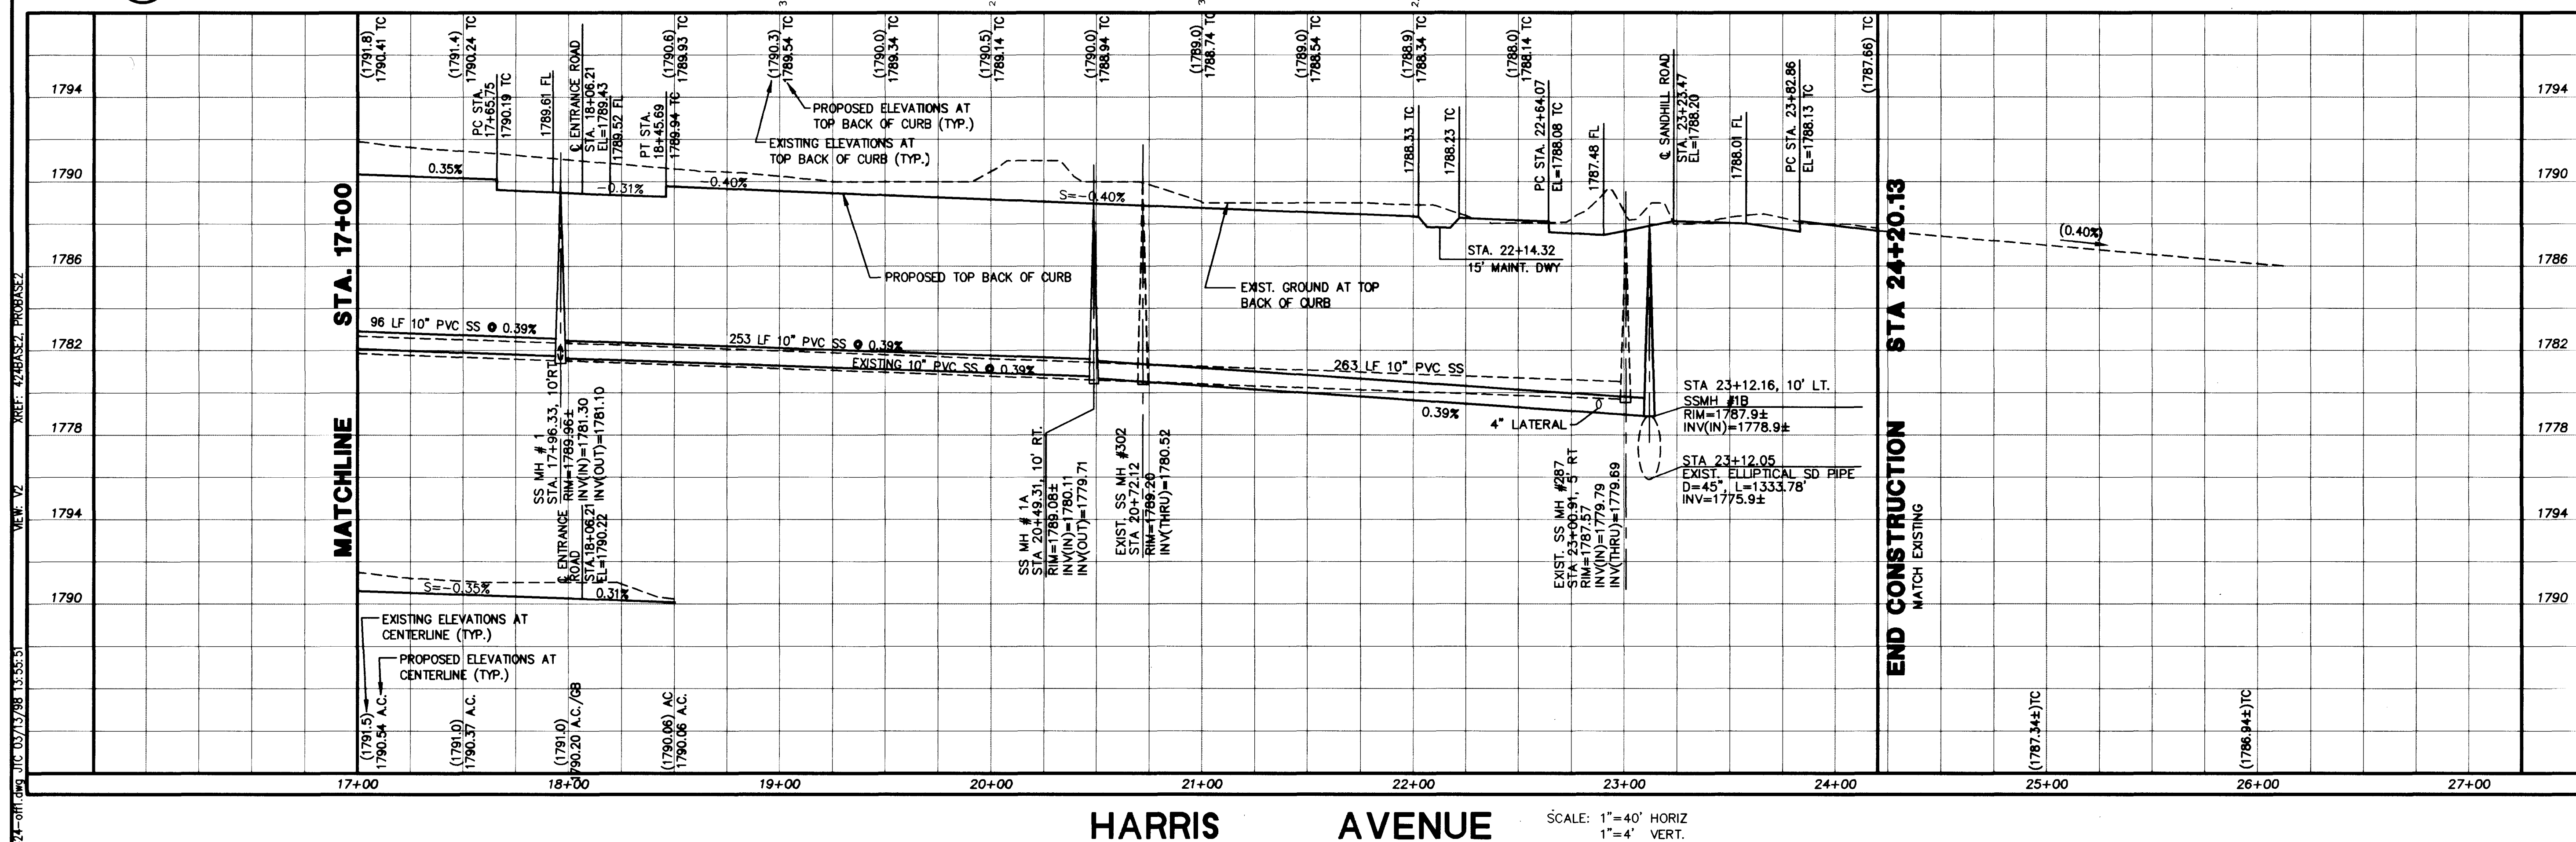


HARRIS AVENUE

SCALE: 1"=40' HORIZ
1"=4' VERT.

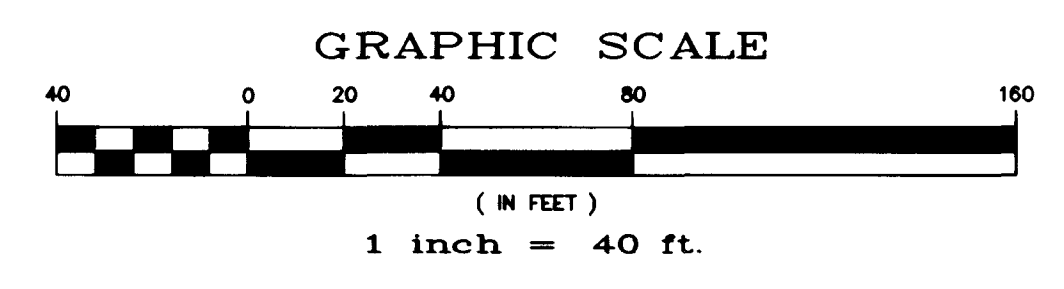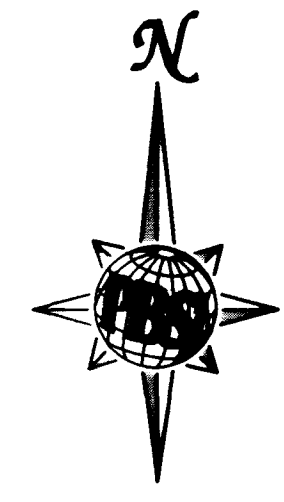

CONSTRUCTION KEY NOTES

1. CONSTRUCT TYPICAL SECTION PER C.C.U.S.D. NO. 205 (60' R.O.W.). SEE DETAIL "A" ON THIS SHEET. CONTRACTOR TO VERIFY ELEVATIONS PRIOR TO CONSTRUCTION AND MATCH AC PAVEMENT AT CENTERLINE
2. CONSTRUCT 5' SIDEWALK PER C.C.U.S.D. NO. 234, SEE DETAIL "J" ON SHEET C6.01
3. CONSTRUCT "L" TYPE CURB AND GUTTER PER C.C.U.S.D. NO. 216, SEE DETAIL "F" ON SHEET C6.01
4. CONSTRUCT 8" CROSS GUTTER C.C.U.S.D. NO. 228
5. LIMITS OF SAWCUT
6. REMOVE EXISTING PAVEMENT
7. REMOVE EXISTING BARRICADES
8. ADJUST VALVE BOX TO FINISHED GRADE. VALVES SHALL BE ACCESSIBLE AT ALL TIMES
9. ADJUST MANHOLE TO FINISHED GRADE AND ADD 12" CONCRETE COLLAR PER SD-30.
10. CONSTRUCT STORM DRAIN OUTLET (SEE DETAIL "Q" ON SHT. C6.02) AND UNDERSIDEWALK DRAIN (SEE DETAIL "N" ON SHT. C6.02)
11. MATCH EXISTING CURB, GUTTER, SIDEWALK AND A.C. PAVEMENT
12. EXISTING SIDEWALK, CURB AND GUTTER TO REMAIN. PROTECT IN PLACE
13. CONSTRUCT MAINTENANCE DRIVEWAY PER C.C.U.S.D. NO. 224
14. CONSTRUCT HALF STREET CROSS GUTTER PER C.C.U.S.D. NO. 229
15. CONSTRUCT SIDEWALK RAMP PER C.C.U.S.D. NO. 235, CASE I
16. CONSTRUCT 10' SIDEWALK PER C.C.U.S.D. NO. 234, SEE DETAIL "J" ON SHEET C6.01
17. CONSTRUCT SIDEWALK RAMP PER C.C.U.S.D. NO. 235, CASE I
18. INSTALL NO. 3 1/2 PULLBOX
19. INSTALL NO. 5 PULLBOX

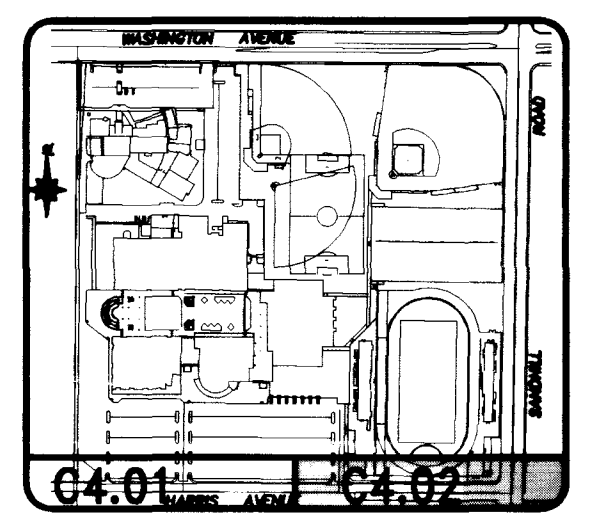

KEY MAP

N.T.S.

Call before you Dig

1-800-227-2800

Call before you Overhead

1-702-593-6111

TATE & SNYDER ARCHITECTS

709 VALLE VERDE COURT
HENDERSON NEVADA 89014
(702) 456.3000

CLARK COUNTY SCHOOL DISTRICT

CONSTRUCTION MANAGEMENT DEPARTMENT 4828 S. PEARL STREET 709-7600 LAS VEGAS, NEVADA 89121

SANDHILL ROAD/WASHINGTON AVENUE HIGH SCHOOL

LAS VEGAS

C4.02

SHEET 19 OF 32

