



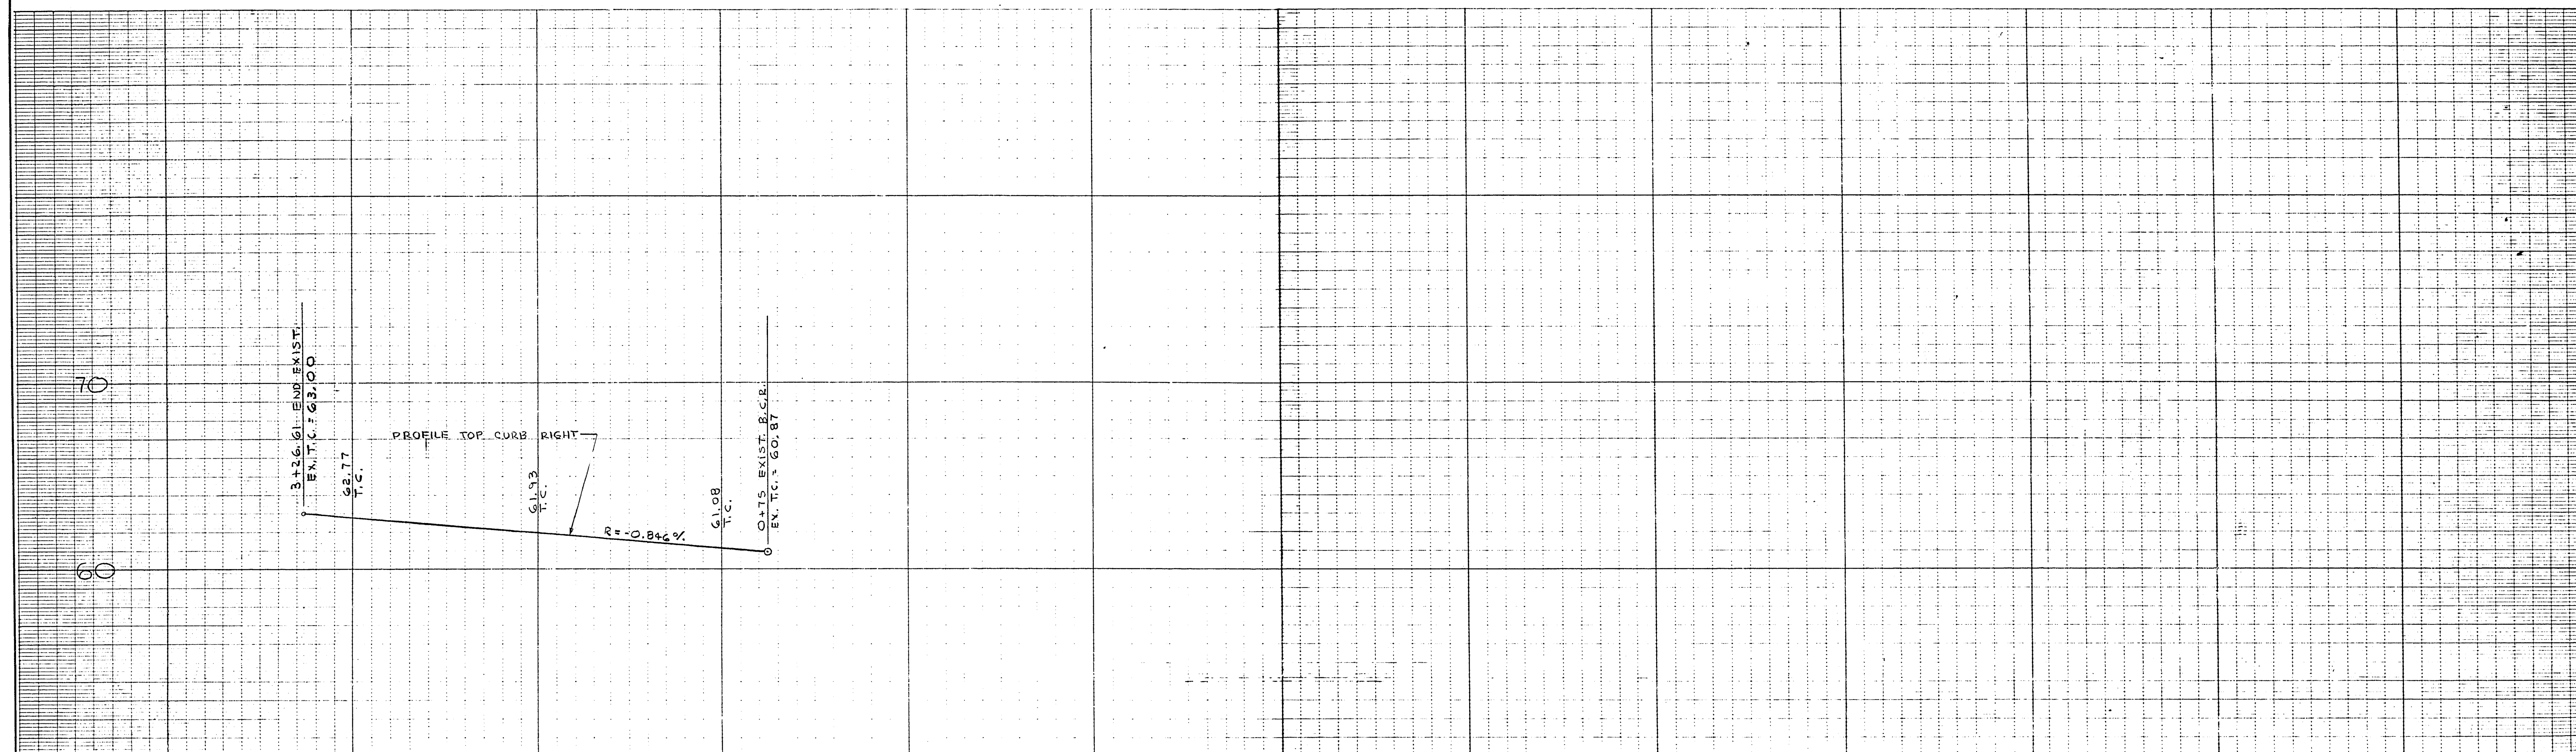


EXIST. METROPOLITAN PARK
UNIT NO. 16

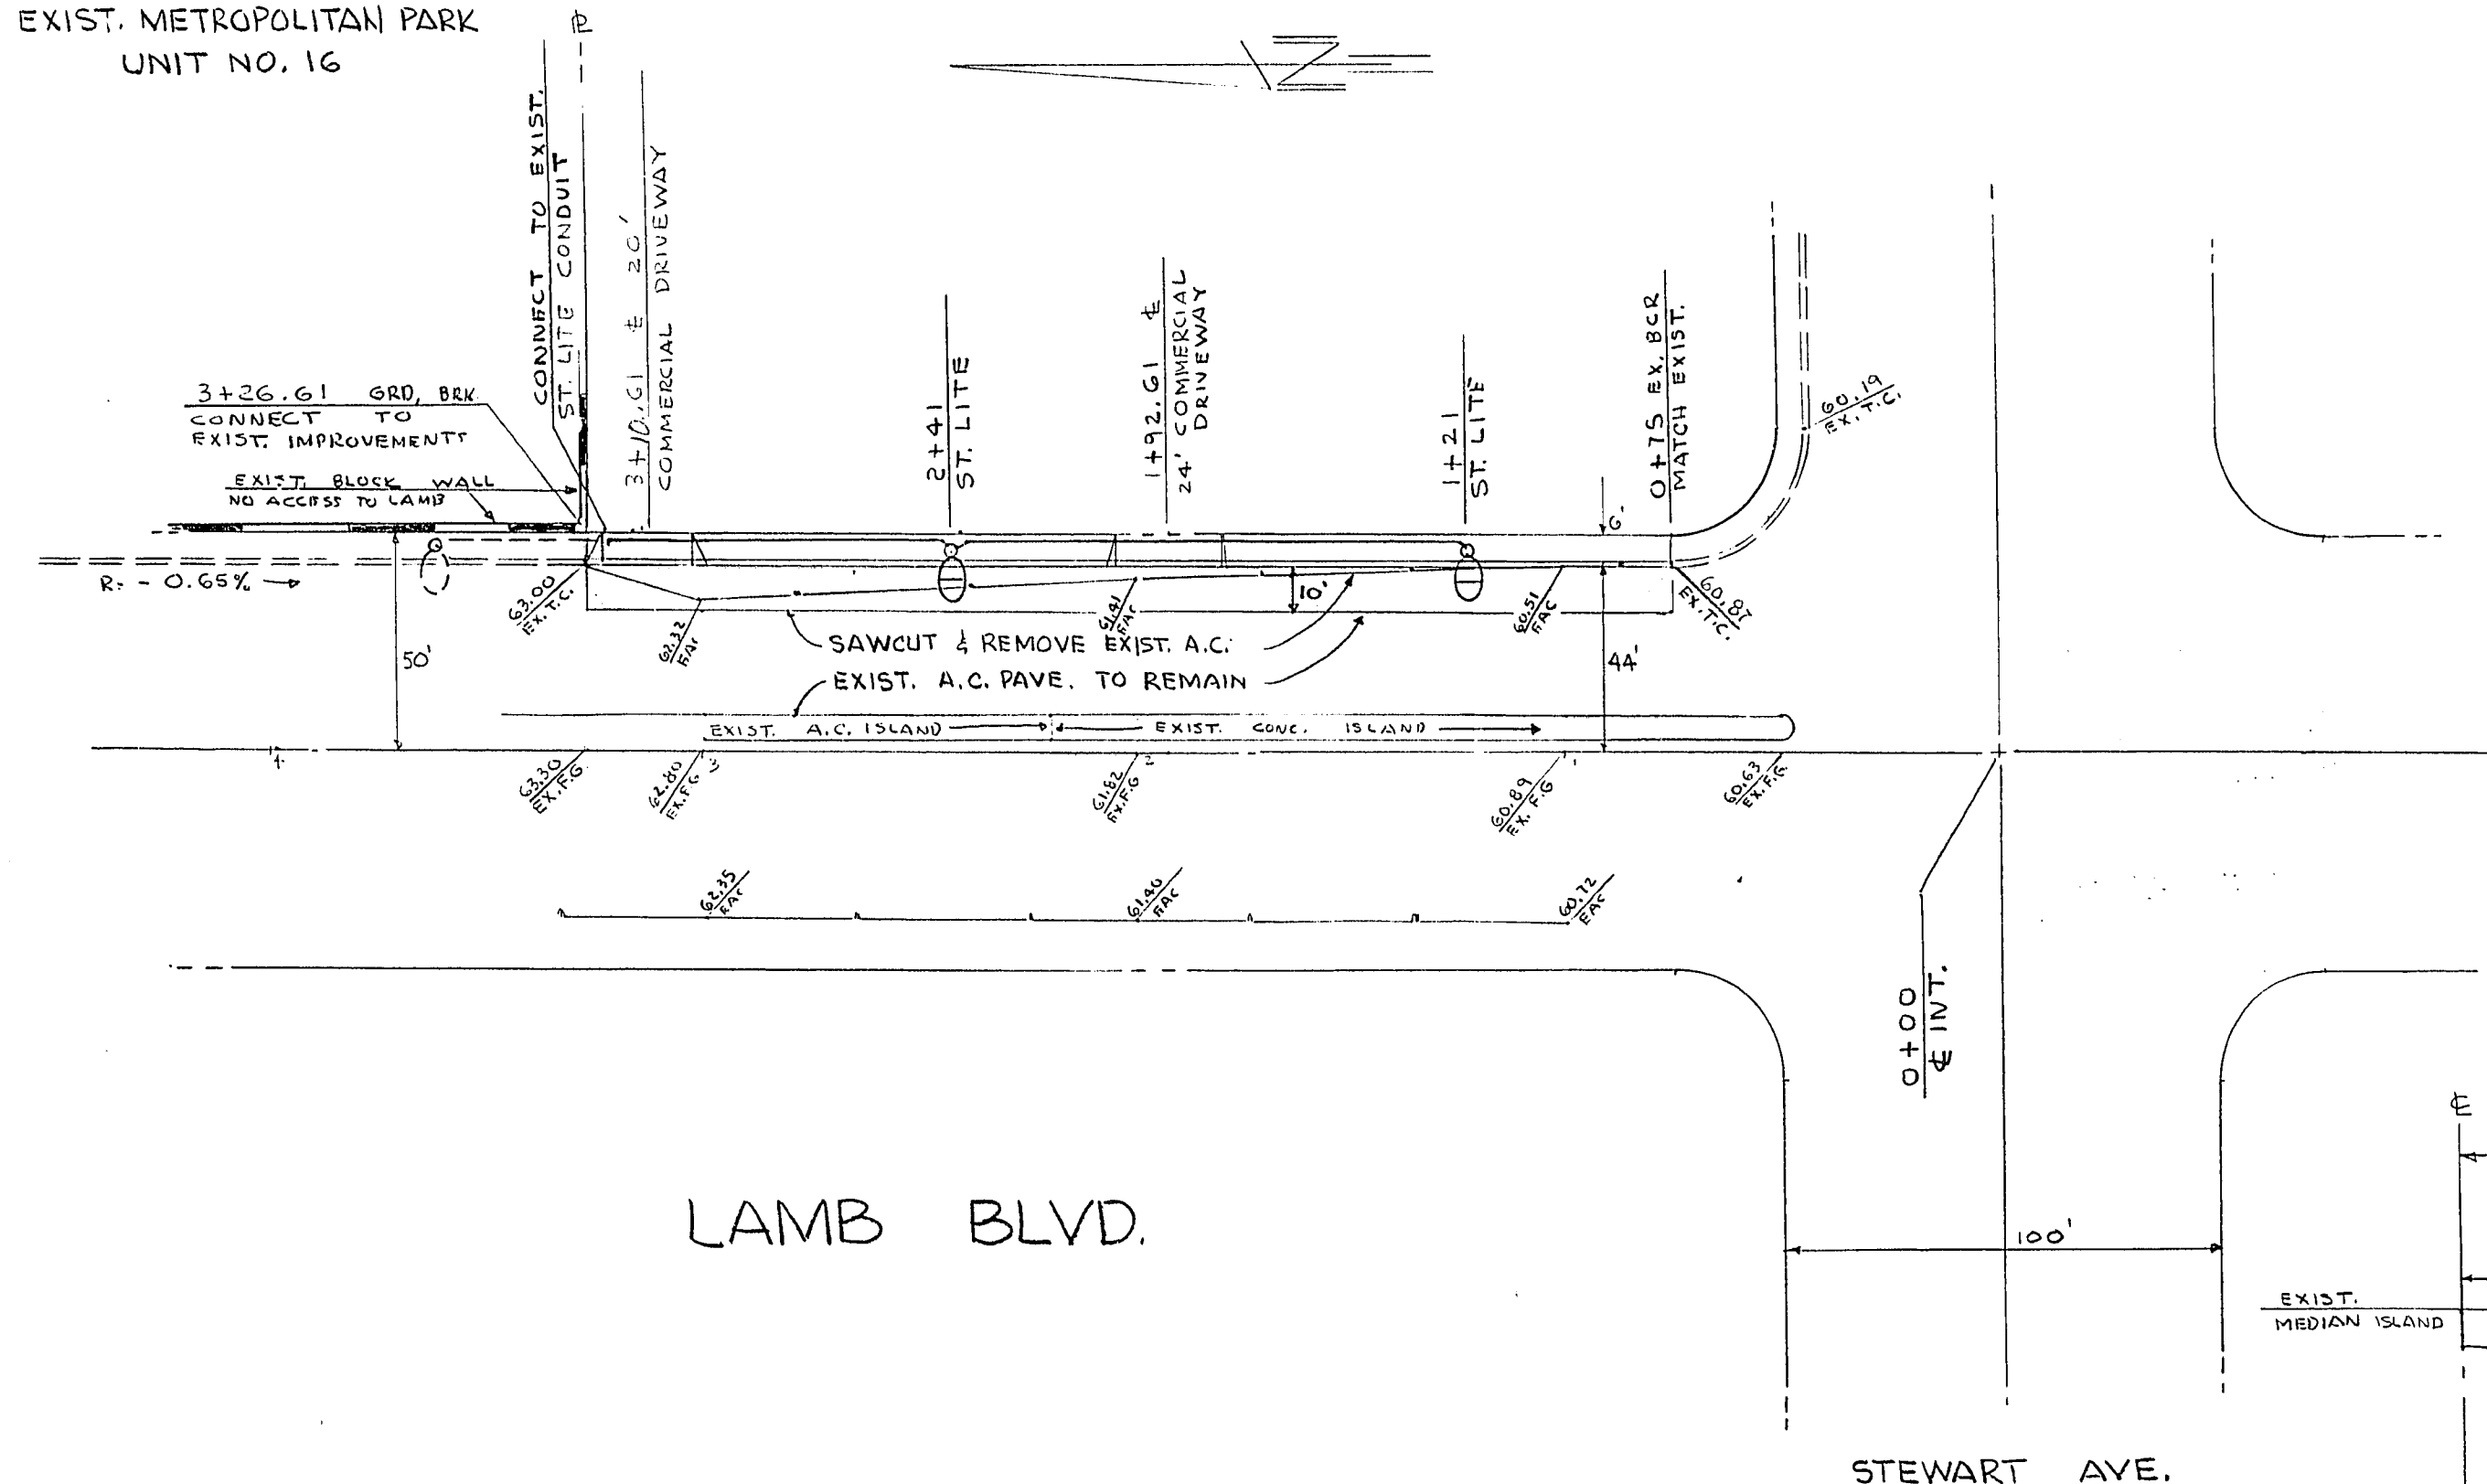

LAMB BLVD.


STEWART AVE.

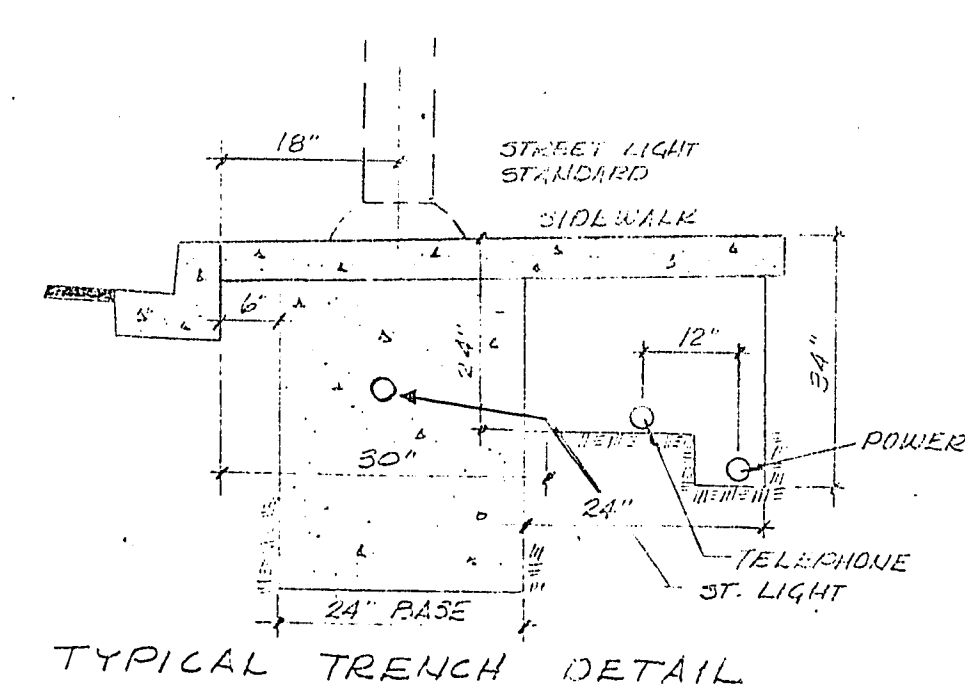

TYPICAL TRENCH DETAIL

NEVADA POWER CO. APPROVES THE POINT OF
INSTALLATION OF THE TRENCH SYSTEM. THE TRENCH
SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH THE
NEVADA POWER CO. TRENCHING SPECIFICATIONS.

7-27-78
NEVADA POWER CO.

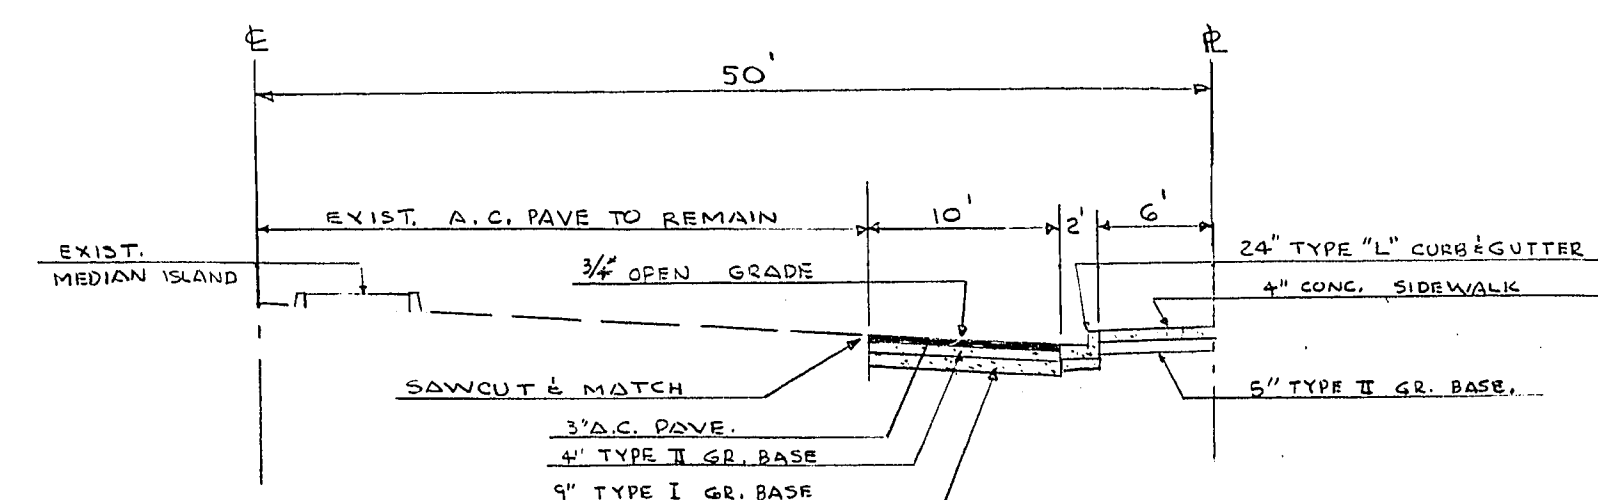

STREET SECTION - LAMB BLVD.

APPROVED BY

Michael B. [Signature]
NEVADA POWER CO.

7-27-78
DATE

[Signature]
CLV CIVIL ENGINEER

7-31-78
DATE

[Signature]
CLV ELECTRICAL SUPERVISOR

4-28-78
DATE

[Signature]
CLV ELECTRICAL COORDINATOR

7-28-78
DATE

[Signature]
CLV TRAFFIC ENGINEER

7-28-78
DATE

[Signature]
CLV FIRE MARSHALL

7-28-78
DATE

[Signature]
CLV QUALITY CONTROL ENGINEER

7-28-78
DATE

[Signature]
CLV FIELD OPERATIONS ENGINEER

7-31-78
DATE

ESTIMATE OF QUANTITIES

1. REMOVE EXIST. A.C. PAVEMENT	= 112 S.Y.
2. 3" A.C. PAVEMENT	= 280 S.Y.
3. 6" x 6" DRIVEWAY APPROACHES	= 264 S.F.
4. 24" TYPE "L" CONC. CURB & GUTTER	= 252 L.F.
5. 4" CONC. SIDEWALK	= 1,246 S.F.
6. 250 WATT H.P.S. LUMINAIRE	= 2 EA.
7. 1 1/4" P.V.C. CONDUIT	= 200 L.F.

GENERAL NOTES

- ALL CONSTRUCTION TO BE IN ACCORDANCE WITH THE CITY OF LAS VEGAS STANDARDS & SPECIFICATIONS.
- CONTRACTOR SHALL PROVIDE ALL NECESSARY HORIZONTAL AND VERTICAL TRANSITION BETWEEN NEW CONSTRUCTION AND EXISTING SURFACES TO PROVIDE FOR PROPER DRAINAGE AND OF INGRESS AND EGRESS TO SAID CONSTRUCTION. EXTENT OF TRANSITIONS TO BE DETERMINED BY THE CITY ENGINEER.

EXIST. MANHOLE - 3+26.61 (ELEV. 63.00)
HP# 57138 NP @ NE CORNER
CHARLESTON & LAMB - EL. 1751.71

SUBMITTED BY:

[Signature]
ELWYN G. WILKINSON P.E.
NEV. CERT. NO. 3335

4-21-78
DATE

CONSULTING ENGINEERS • PLANNERS
2500 PARADISE ROAD, LAS VEGAS, NEVADA 89105
(702) 735-0227

STREET IMPROVEMENT PLAN
LAMB BLVD.

SCALE:	WO. NO. 2618	DATE 4-21-78	SHEET	OF
HORIZ: 1" = 40'	DES. E.G.W.	REV.	1	2
VERT: 1" = 4'	CHK.	REV.		