

QUANTITIES

SHEET NO.

4 5 6 7 8 9 10 11 12 13

STREET IMPROVEMENTS:

NO.	LEGEND	DESCRIPTION	UNIT	TOTAL	TOTALS BY SHEET									
1		1 1/2" AC PAVEMENT	S.Y.	17,651										
2		TYPE II GRAVEL BASE	C.Y.	3,316	36	76	70	52	2,470	2,231	3,639	3,500	3,500	2,311
3		30" "ROLL" TYPE CURB & GUTTER	L.F.	9,013					427	410	620	605	605	415
4		8' VALLEY GUTTER	S.F.	1,595					1,270	1,181	1,791	1,800	1,800	1,171
5		4' SIDEWALK	S.F.	36,053						664				931
6		HANDICAP RAMP	EA.	2					5,079	4,725	7,165	7,200	7,200	4,684
7		CONCRETE DRIVEWAY	S.F.	12,752	1,944	4,224	3,780	2,804		2				

WATER:

1		STD. F.H. W/6" G.V. & 6" A.C.P. LATERAL	EA.	9	1	4	2	2						
2		3/4" SERVICE W/METER BOX	EA.	104	18	38	35	13						
3		3/4" METER BY L.V.V.W.D.	EA.	104	18	38	35	13						
4		5/8" SERVICE W/METER BOX	EA.	16				16						
5		5/8" METER BY L.V.V.W.D.	EA.	16				16						
6		6" PVC	L.F.	1,594	668	542	351	33						
7		8" PVC	L.F.	1,371		956	415							
8		10" PVC	L.F.	1,190			443	747						
9		12" PVC	L.F.	319		319								
10		6" GATE VALVE	EA.	2		2								
11		8" GATE VALVE	EA.	2		2								
12		10" GATE VALVE	EA.	1				1						
13		8"X 6" REDUCER	EA.	2			2							
14		10"X 8" REDUCER	EA.	1			1							
15		12"X 8" REDUCER	EA.	1		1								
16		8"-45° BEND	EA.	6		6								
17		12"-45° BEND	EA.	2		2								
18		12"X 12" TEE	EA.	1		1								
19		BLOW OFF VALVE	EA.	3			2							
20		1 1/2" IRRIGATION METER & SERVICE	EA.	2				2						
21		8"X 6" TEE	EA.	1		1								
22		12" GATE VALVE	EA.	1		1								

SEWER:

1		8" PVC SEWER	L.F.	1,253					614	587	15			37
2		4" LATERAL	L.F.	3,547	547	1,210	1,044	746						
3		STD. MH.	L.F.	14					3	2	2	2	3	2
4		SEWER ENCASEMENT	L.F.	100						20	60		20	
5		DROP MANHOLE	EA.	1							1			
6		10" PVC SEWER	L.F.	3,402						1,185	830	900	487	

STREET LIGHTS:

1		100W. HRS LUMINAIRE W/11 GA. POLE	EA.	27	5	10	8	4						
2		3 1/2" PULL BOX	EA.	1		1								
3		1 1/4" PVC CONDUIT	L.F.	4,449	632	1,780	1,285	752						

MISCELLANEOUS:


1		6" D-3 STREET NAME SIGN	EA.	2	1	1								
		30" R1-1 STOP SIGN	EA.	1	1									

STORM DRAIN:

1		MODIFIED TYPE "C" DROP INLET L=12'	EA.	2						2				
2		MODIFIED TYPE "C" DROP INLET L=15'	EA.	2							2			
3		14" x 23" ELLIPTICAL R.C.P.	L.F.	35										
4		19"X 30" ELLIPTICAL R.C.P.	L.F.	51										
5		24" RCP	L.F.	372							242		130	
6		STD. STORM DRAIN MH.	EA.	2							2			
7		20' X 4' ARCH CULVERT	EA.	80							80			
8		END WALL	L.F.	2							2			
9		18" R.C.P.	L.F.	65									65	
10		MODIFIED TYPE "C" DROP INLET L=18'	EA.	2									2	

NOTE TO CONTRACTOR

QUANTITIES SHOWN ARE ESTIMATES ONLY AND ARE INTENDED TO ILLUSTRATE SCOPE OF WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE EXACT QUANTITIES INVOLVED.

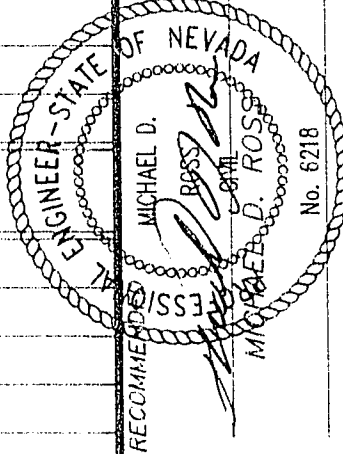

G. C. WALLACE, INC.
Engineering/Architecture
1555 SOUTH RANNEY BLVD., LAS VEGAS, NEVADA 89102

DEL WEBB COMMUNITIES, INC.
SUN CITY LAS VEGAS UNIT NO. 37
ESTIMATE OF QUANTITIES

SHEET
3

OF 26 SHEETS

JOB NO. 701164
PLOTTER: 06/29/92 1:18 pm DRAWING: 437-J

10-9-95

101Y-4141-37