


ROADWAY	SHEETS																REMOVE & REPLACE					TOTAL
	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29					
202.00.13 SAWCUTTING	SEE DEMOLITION SHEETS 6 THRU 10												475	1355	240				2070 LF			
202.00.14 MINOR STREET REMOVAL													2567	8600	1100			12267 SF				
202.00.15 MINOR SIDE STREET REMOVAL		1175						900	960				1081					4116 SF				
202.00.16 MINOR CONCRETE REMOVAL													1630	3720	1120			6470 SF				
302.00.01 TYPE I AGGREGATE BASE	3115	3281	3333	2913	2722	3233	3280	3210	3343	1049	1123	1123	108	344	60			32,237 CY				
302.00.02 TYPE II AGGREGATE BASE	1780 18	1747	1895 7	1602	1440	1937	1846	1798	1970	568	604	615	75	200	45			18,157 CY				
401.00.10 6 1/2" ASPHALTIC CONCRETE PAVEMENT	3220	3418	3216	2912	2860	3027	3385	3310	3126	1105	1191	1177	102	296	55			32,400 TONS				
401.00.20 2 1/2" ASPHALTIC CONCRETE PAVEMENT (ALTERNATE)	1237	1315	1237	1120	1100	1164	1302	1273	1202	425	458	453						12,286 TONS				
401.00.30 1 1/2" ASPHALTIC CONCRETE MEDIAN PAVING	16		79	29	3	92	31	34	84									368 TONS				
401.00.40 5' ASPHALTIC CONCRETE SIDEWALK		870	5000	3384	1675	4150							500	4300				19,879 SF				
401.00.50 SIDE STREET ASPHALT CONCRETE PAVEMENT REPLACEMENT		1175						900	960				1081					4116 SF				
403.00.01 3/4" OPEN GRADED PLANT MIX SURFACING (ADDITIVE)	8521	9049	8517	7708	7523	8014	8963	8763	8311	2926	3152	3117	382	866	67			85,879 SY				
404.00.10A 4" RECYCLED BITUMINOUS PAVEMENT (ALTERNATE)	1983	2103	1979	1792	1760	1863	2083	2037	1924	680	733	724						19,661 TONS				
407.00.01 SEAL COAT	9182	9049	9199	8039	7560	9068	9321	9160	9280	2926	3152	3117	405	955	122			90,535 SY				
408.00.01 SLURRY SEAL		403	555	370	186	461							172	478				2631 SY				
609.03.02 ADJUST MANHOLES	3	1 4	2 2	2 2		2	4 3	2 4	2 3	1 2		1						40 EA.				
609.03.03 TEMPORARY MANHOLE RAISING (ADDITIVE)	3	1 4	2 2	2 2		2	4 3	2 4	2 3	1 2		1						40 EA.				
613.00.01 24" TYPE 'L' CURB & GUTTER	297	1197	2000	1448	1184	1080	558	343	1731	403	145	301	248	1118	160			12213 LF				
613.00.02 CONCRETE MEDIAN CURB	1746	1582	1829	1581	1020	1859	1071	1702	1823	377	621	635						16446 LF				
613.00.08 CONCRETE SIDEWALK		2415			1275		2800	1325		375	725	450	1140	1500	800			12805 SF				
613.00.09 COMMERCIAL DRIVEWAY			280			260				420		630						1590 SF				
613.00.11 CONCRETE VALLEY GUTTER		560			1200				800				730	580				3870 SF				
613.00.12 CONCRETE ISLAND PAVING	755	3148	1988	2344	1958	1167	2393	2425	1267	740	1228	1256						20,669 SF				
613.00.14 ALLEY GUTTER	744							200										944 SF				
629.00.01 ADJUST WATER VALVE		3	1			3	9	9	4	3								32 EA.				
629.00.02 ADJUST WATER METER BOX			1	1		1		1	2									6 EA.				
629.00.06 TEMPORARY WATER VALVE RAISING		3	1			3	9	9	4	3								32 EA.				
609.03.01 BREAK INTO EXIST MANHOLE			1															1 EA				
609.03.04 SANITARY SEWER MANHOLE		1	1															2 EA				
630.00.01 8" VITRIFIED CLAY PIPE		185	528															760 LF				
202.00.17 VALLEY GUTTER & DRIVEWAY REMOVAL													730	580				1310 SF				

744 - QUANTITY TO BE PAID FOR BY THE CITY OF LAS VEGAS

DEMOLITION	SHEETS					TOTAL
	6	7	8	9	10	
202.00.01 REMOVAL OF BITUMINOUS ROADWAY SURFACE	20,933	15,264	15,799	18,280	4,597	85,473 SY
202.00.02 REMOVAL OF MEDIAN CURB	4,203	3570	2912	3455	2997	17,137 LF
202.00.03 REMOVAL OF CONCRETE MEDIAN PAVING	782	649	417	783	490	3,121 SY
202.00.04A REMOVAL OF BITUMINOUS MEDIAN SURFACE	488	1059	636	221	741	3,145 SY
202.00.04B REMOVAL OF BITUMINOUS SIDEWALK	97	931	650			2212 SY*
202.00.05 REMOVAL OF CONCRETE CURB & GUTTER	1511	3452	2006	716	2437	10,122 LF
202.00.06 REMOVAL OF CONCRETE SIDEWALK	3179		1275	4125	775	9,354 SF
202.00.07 REMOVAL OF CONCRETE VALLEY GUTTER	1520		1200		800	3520 SF
202.00.08 REMOVAL OF CONCRETE DRIVEWAY			260		910	1170 SF
202.00.09 REMOVAL OF ALLEY GUTTER				200		200 SF
202.00.10 REMOVAL & SALVAGE OF STREET LIGHT POLE, LUMINAIRE AND/OR SIGNAL HEAD	3	16	15	17	9	60 EA.**
202.00.10A REMOVAL & SALVAGE OF STREET LIGHT POLE, LUMINAIRE (ADDITIVE)	10					10 EA.
202.00.11 REMOVAL OF STREET LIGHT & TRAFFIC POLE FOUNDATIONS			3	1		4 EA.**
202.00.12 REMOVAL & SALVAGE OF PULL BOXES	3	2	1	2		8 EA.
202.00.13 SAWCUTTING	625	1870	175	235	345	3250 LF
203.00.01 ROADWAY EXCAVATION	13,378	10,066	10,221	11,269	9674	54,608 CY
203.00.02 SUBGRADE PREPARATION	22,572	19,396	17,722	19,655	16,522	95,867 SY
203.00.03 OVEREXCAVATION	ESTIMATED QUANTITY FOR PRICING PURPOSES ONLY					25,000 CY
203.00.04 LIME TREATED MATERIAL OVER-EXCAVATION	ESTIMATED QUANTITY FOR PRICING PURPOSES ONLY					5,000 CY

* INCLUDES 534 SY OF AC REMOVAL SHEET 25 & 26
 ** QUANTITIES FOR ST. LT. REMOVAL & SALVAGE AND FOUNDATION REMOVAL IN THE INTERSECTIONS OF MOJAVE ROAD AND LAMB BLVD. ARE INCLUDED IN THE LUMP SUM WORK FOR THE STREET SIGNAL REPAIR.

REVISIONS		
NO.	DESCRIPTION/DATE	BY

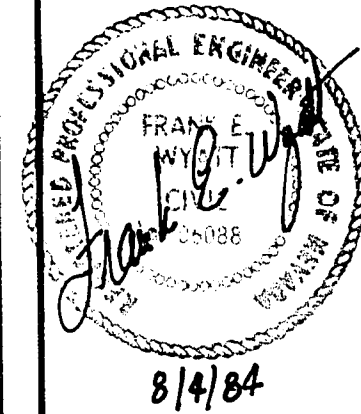

SPARKS, NEVADA
 LAS VEGAS, NEVADA
 SEATTLE, WASHINGTON
 incorporated
SEI
 ENGINEERS/PLANNERS

CITY OF LAS VEGAS
STEWART AVENUE
 28TH STREET TO NELLIS BOULEVARD
QUANTITIES

JOB NO. 2-241-005-821
 DESIGNED KA
 DRAWN AC
 COMP.
 CHECKED
 DATE FEBRUARY, 1984