

RMG

Outdoor Inc.

March 24, 2008

City of Las Vegas
Planning and Development Department
Attn: Andrew P. Reed
731 South 4th Street
Las Vegas, Nevada 89101

Dear Andrew:

This letter is regarding a billboard structure owned by Clear Channel Communications. The structure is located at 2111 Western Avenue, Las Vegas, Nevada 89102. It can be referenced by APN 162-04-801-001, case number RQR-26303 and permit number 98-005004. The structure is a 12' x 25', center mount, back-to-back build and is 35'-0" in overall height.

We have been asked to perform a visual review of the billboard structure and attest to the soundness of said structure. On March 21, 2008 I was on site to perform this review.


During this visual observation, I noted no deficiencies (cracks, extensive corrosion nor deformed steel) that would impact the structural integrity of this structure. One item does require attention. The access ladder to the structure is attached at the top to the front walkway as is common within the industry. However, the lower part of the ladder is attached to the column with only one piece of steel angle. Under lateral loads, this could cause the ladder to twist and subject it to stresses for which it was not designed. I recommend that an additional ladder support be added adjacent to the existing lower support. It is my understanding that Clear Channel will retain a contractor to resolve this item.

This structure was originally built in 1998. According to the current owner, the structure has been trouble free during their ownership. There have been no noted instances of broken bolts or bent steel members.

It should be noted that this review was simply a visual one of the permanent structure. No as built evaluation or material testing was done nor was a review of any temporary attachments performed. This letter does not represent a structural certification of the billboard structure.

In conclusion, it is our opinion that the billboard structure is in sound condition.

Sincerely,



John S. Weaver
Director of Engineering

Reviewed by,

Steven W. Schaub, P.E.
SE Consultants



MAR 24 2008

RECEIVED

MAR 25 2008

Submitted after final agenda

Date

Item 14

4425 North 24th Street Suite 200 Phoenix, Arizona 85016

Phone
602-230-8634

Fax
602-230-9071

Toll Free
800-525-8509

www.rmg-online.com

RQR-26303
REVISED
03/27/08 PC

CLEAR CHANNEL

unlimited talk
\$35/month

from your home calling area, other monthly charges apply**

UNLTD
boostmobile.com

**Security alerts include fees and service fees. Tracking (2008) included. E911 fees also not include voice mail. Other fees include in all metropolitan locations or for all phone services. Clear Channel Media



RECEIVED
MAR 25 2008

Submitted after final agenda
Date Item 14

RQR-26303
REVISED
03/27/08 PC




CLEAR CHANNEL

93.1
The Party

wake up with
WHOOP!

The Music That Moves You

931TheParty.com

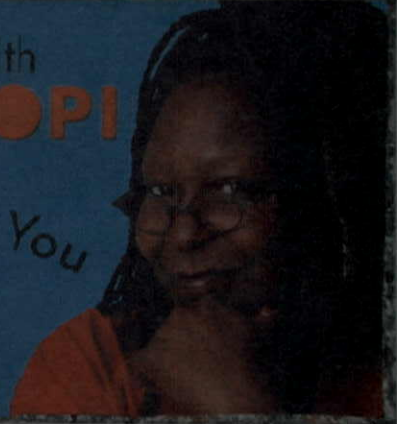

RECEIVED
MAR 25 2008

Submitted after final agenda

Date

Item 14

RQR-26303
REVISED
03/27/08 PC