

FIRST SUPPLEMENTAL INTERLOCAL CONTRACT

FOR LOCAL DRAINAGE IMPROVEMENTS IN JONES BOULEVARD – ALTA TO
BORDEN STORM DRAIN

THIS FIRST SUPPLEMENTAL INTERLOCAL CONTRACT made and entered into as of the 13th day of November, 2008 by and between the Clark County Regional Flood Control District, hereinafter referred to as “DISTRICT” and the CITY OF LAS VEGAS, hereinafter referred to as “CITY”.

WITNESSETH

WHEREAS, pursuant to Chapter 543 of the Nevada Revised Statutes, the DISTRICT may approve a project to design and construct flood control improvements, and;

WHEREAS, the PROJECT is identified and shown on the attached Exhibit “A”; and

WHEREAS, the City wishes to increase construction funding and extend the project completion date.

NOW, THEREFORE, in consideration of the covenants, conditions, contracts, and promises of the parties hereto, the DISTRICT and the CITY agree to the following:

SECTION II - PROJECT COSTS shall be revised to read as follows:

The DISTRICT agrees to fund PROJECT costs within the limits specified below:

1. Construction costs shall not exceed \$1,095,000 or 100 percent of construction of the first quarter mile and 50 percent for the remainder of the project, whichever is less.
2. The total cost of this CONTRACT shall not exceed \$1,095,000 which includes all items described in paragraph one above and funds will be made available after July 10, 2008.

SECTION III – GENERAL, paragraph 13 shall be revised to read as follows:

13. The items covered in SECTION II - PROJECT COSTS must be completed to the satisfaction of the DISTRICT prior to April 4, 2010. The DISTRICT may, at any time thereafter, grant extensions or terminate this Contract after thirty (30) days notice.

The remainder of the original Interlocal Contract shall remain unchanged.

IN WITNESS WHEREOF, the Parties have caused this First Supplemental Interlocal Contract to be executed by their duly authorized representatives the day and year first above written.

Date of Council Action


11/7/2009

Date of District Action

November 13, 2008

City of Las Vegas

Regional Flood Control District


By: 
Oscar B. Goodman, Mayor

By: 
LAWRENCE L. BROWN, III,
Chairman

Attest


Attest


By: 
Beverly K. Bridges, CMC
City Clerk

By: 
Carolyn Frazier
Secretary to the Board

Approved as to form

Approved as to Form

By:  11/24/08
Deputy City Attorney Date

By: 
Christopher Figgins Date
Chief Deputy District Attorney

JONES BOULEVARD - ALTA DRIVE TO BORDEN CIRCLE - STORM DRAIN IMPROVEMENTS

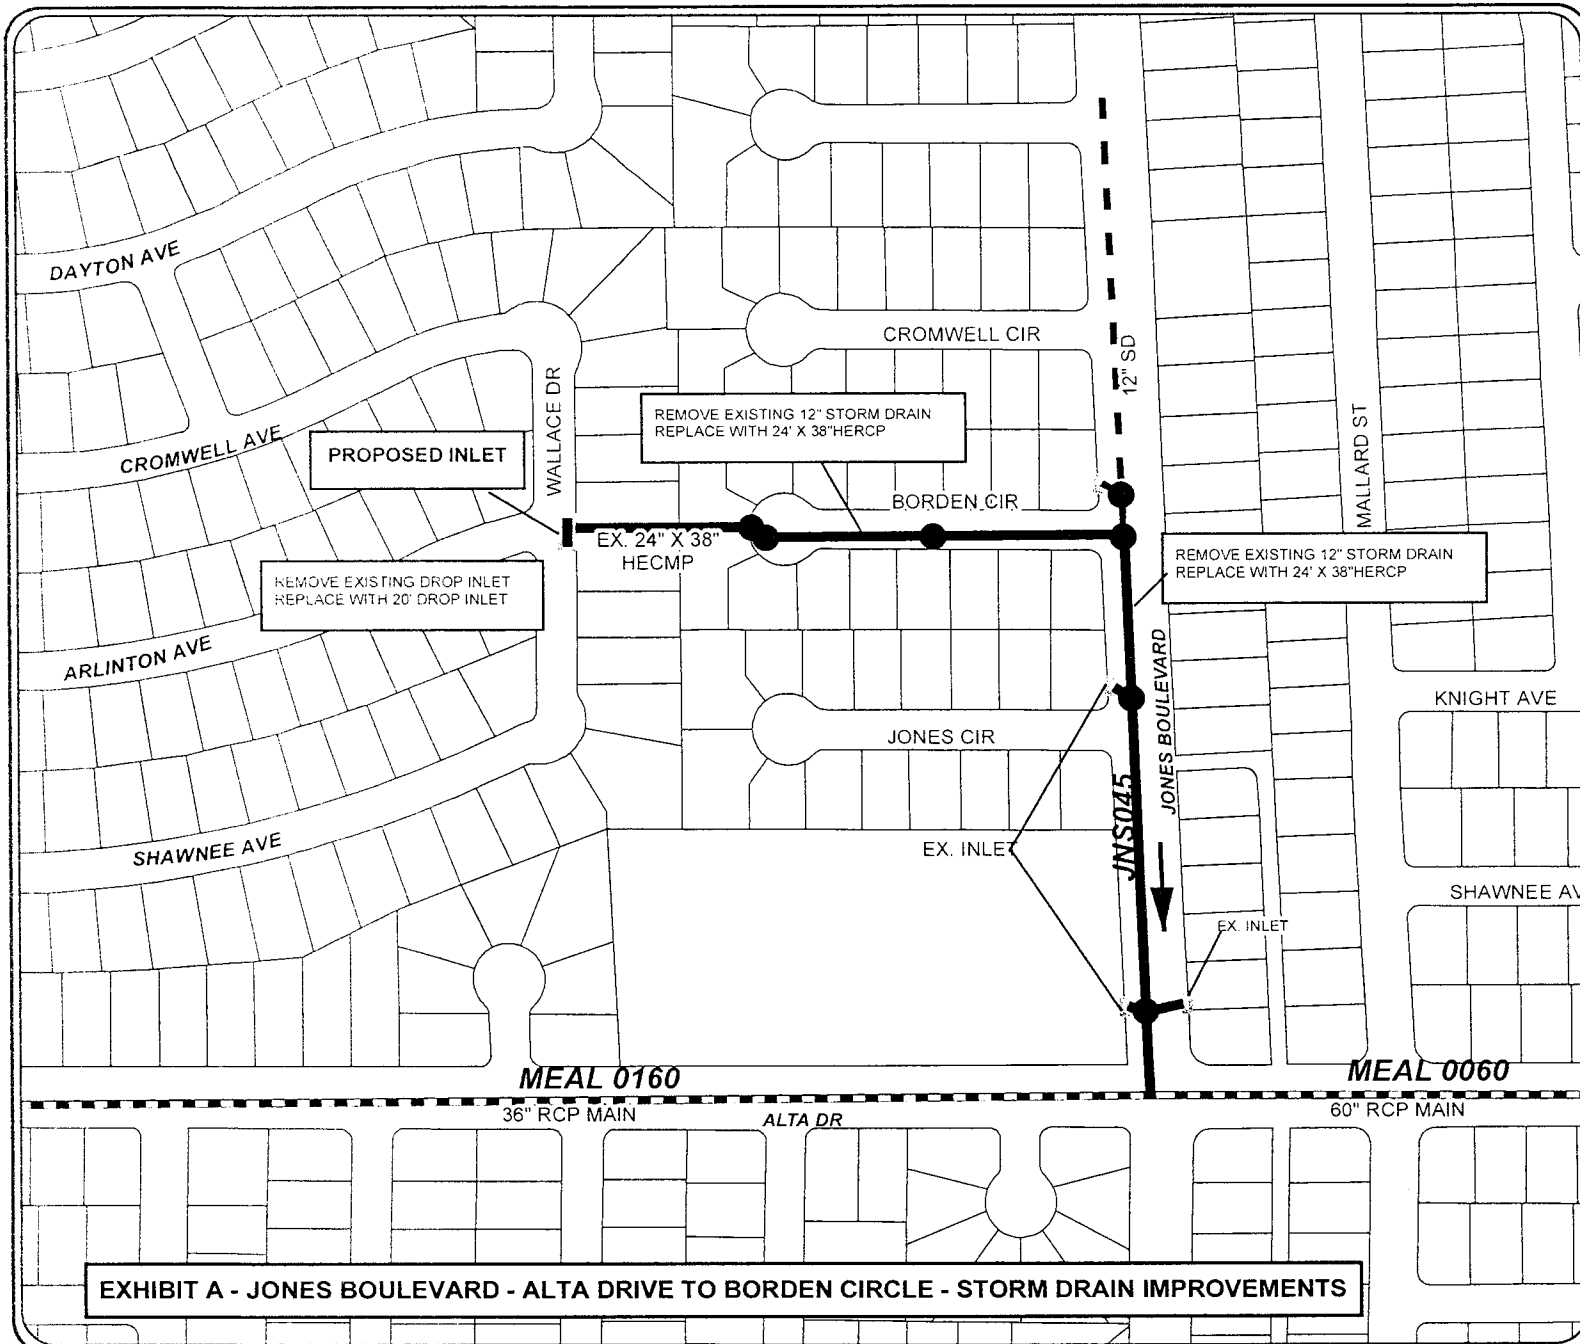



EXHIBIT A - JONES BOULEVARD - ALTA DRIVE TO BORDEN CIRCLE - STORM DRAIN IMPROVEMENTS



- PROPOSED LOCAL FACILITY
- EXISTING LOCAL FACILITY
- EXISTING CCRFCD FACILITY
- (DRAWING # AND SIZE)
- EXISTING INLET
- PROPOSED INLET
- PROPOSED MANHOLE



THIS MAP IS A PRELIMINARY PRODUCT
 ONLY TO BE USED FOR INFORMATIONAL PURPOSES.
 Due to continuous development activity,
 this map is for reference only.
 Created by: [Name]
 Date: [Date]

MEADOWS ALTA PARALLEL PROJECT - JONES NORTH LATERAL
STORM DRAIN IMPROVEMENTS

ITEM NO.	PAY ITEM	QUANTITY	PAY UNIT	UNIT PRICE	EXTENDED PRICE	First 1/4 mile			50% CORFCD			50% CLV		
						Quantity	Cost	0.94	Quantity	Cost	0.03	Quantity	Cost	0.03
200.01	MOBILIZATION AND DEMOBILIZATION	1	LS	\$ 45,000.00	\$ 45,000.00	0.94	\$ 42,300.00		0.03	\$ 1,350.00		0.03	\$ 1,350.00	
202.01	REMOVAL OF STORM DRAIN MANHOLE	6	EA	\$ 1,500.00	\$ 9,000.00	6	\$ 9,000.00		0.03	\$ 750.00		0.5	\$ 750.00	
202.02	REMOVAL OF 12" STORM DRAIN PIPE	2	EA	\$ 1,500.00	\$ 3,000.00	1	\$ 1,500.00		0.5	\$ 750.00		0.5	\$ 750.00	
202.03	REMOVAL OF 24" STORM DRAIN PIPE	1190	LF	\$ 90.00	\$ 107,100.00	1,190	\$ 107,100.00							
202.04	REMOVAL OF 24" STORM DRAIN PIPE	52	LF	\$ 220.00	\$ 11,440.00	52	\$ 11,440.00							
202.05	REMOVAL OF ASPHALT PAVEMENT	2885	SY	\$ 4.00	\$ 11,540.00	2,885	\$ 11,540.00							
302.01	TYPE II AGGREGATE BASE	626	CY	\$ 37.00	\$ 23,162.00	626	\$ 23,162.00							
402.01	2-INCH PLANT MIX BITUMINOUS SURFACE	1264	SY	\$ 20.00	\$ 25,280.00	1,264	\$ 25,280.00							
402.02	4-INCH PLANT MIX BITUMINOUS SURFACE	1620	SY	\$ 33.00	\$ 53,460.00	1,620	\$ 53,460.00							
402.03	PLANT MIX BITUMINOUS OPEN-GRADED SURFACE (3/4-INCH)	1620	SY	\$ 9.00	\$ 14,580.00	1,620	\$ 14,580.00							
603.01	24-INCH X 36-INCH HERCP (CLASS III)	708	LF	\$ 260.00	\$ 184,080.00	708	\$ 184,080.00							
603.02	24-INCH X 36-INCH HERCP (CLASS V)	470	LF	\$ 300.00	\$ 141,000.00	470	\$ 141,000.00							
609.01	60-INCH TYPE 1A STORM DRAIN MANHOLE	2	EA	\$ 5,000.00	\$ 10,000.00	2	\$ 10,000.00							
609.02	NDOT TYPE 1 MODIFIED STORM DRAIN MANHOLE	1	EA	\$ 10,000.00	\$ 10,000.00	1	\$ 10,000.00							
609.03	NDOT TYPE 2 MODIFIED STORM DRAIN MANHOLE	2	EA	\$ 12,650.00	\$ 25,300.00	2	\$ 25,300.00							
609.04	NDOT TYPE 4 STORM DRAIN MANHOLE	1	EA	\$ 14,950.00	\$ 14,950.00	1	\$ 14,950.00							
609.05	20-FOOT TYPE CM2 DROP INLET	1	EA	\$ 32,000.00	\$ 32,000.00	0	\$ -		0.50	\$ 16,000.00		0.50	\$ 16,000.00	
613.01	TYPE I CURB AND GUTTER	35	LF	\$ 20.00	\$ 700.00	35	\$ 700.00							
613.02	CONCRETE VALLEY GUTTER	73	SF	\$ 14.00	\$ 1,022.00	73	\$ 1,022.00							
613.03	CONCRETE RESIDENTIAL DRIVEWAY	150	SF	\$ 13.00	\$ 1,950.00	150	\$ 1,950.00							
613.04	CONCRETE SIDEWALK	97	SF	\$ 6.50	\$ 630.50	97	\$ 630.50							
622.01	CONSTRUCTION SURVEYING	1	LS	\$ 12,000.00	\$ 12,000.00	0.94	\$ 11,280.00		0.03	\$ 360.00		0.03	\$ 360.00	
624.01	INSTALL LOOP DETECTORS	8	EA	\$ 900.00	\$ 7,200.00	8	\$ 7,200.00							
625.01	TRAFFIC CONTROL AND MAINTENANCE	1	LS	\$ 11,000.00	\$ 11,000.00	0.94	\$ 10,340.00		0.03	\$ 330.00		0.03	\$ 330.00	
625.02	PORTABLE CHANGEABLE MESSAGE SIGNS	10	DAY	\$ 200.00	\$ 2,000.00	9.40	\$ 1,880.00		0.30	\$ 600.00		0.30	\$ 600.00	
626.01	ARROW DISPLAY	1	DAY	\$ 450.00	\$ 450.00	9.40	\$ 4,230.00		0.30	\$ 135.00		0.30	\$ 135.00	
628.01	TYPE II PAVEMENT MARKING FILM "ONLY"	2	EA	\$ 220.00	\$ 440.00	2	\$ 440.00							
628.02	TYPE II PAVEMENT MARKING FILM FOR ARROWS	308	SF	\$ 7.00	\$ 2,156.00	308	\$ 2,156.00							
628.03	TYPE II PAVEMENT MARKING FILM FOR CROSOWALKS AND STOPB	1	LS	\$ 30,000.00	\$ 30,000.00	1	\$ 30,000.00							
629.01	RELOCATE 6-INCH WATERLINE AT "JB" 28+45.00	1	LS	\$ 30,000.00	\$ 30,000.00	1	\$ 30,000.00							
629.02	REPLACE 12-INCH WATERLINE AT "JB" 22+00.00	1	LS	\$ 20,000.00	\$ 20,000.00	1	\$ 20,000.00							
630.01	48-INCH DIAMETER SANITARY SEWER MANHOLE	4	EA	\$ 7,500.00	\$ 30,000.00	4	\$ 30,000.00							
630.02	8-INCH C900 PVC SANITARY SEWER PIPE	439	LF	\$ 140.00	\$ 61,460.00	439	\$ 61,460.00							
633.01	REFLECTIVE RAISED PAVEMENT MARKERS	69	EA	\$ 3.00	\$ 207.00	69	\$ 207.00							
633.02	NON-REFLECTIVE RAISED PAVEMENT MARKERS	195	EA	\$ 2.00	\$ 390.00	195	\$ 390.00							
637.01	DUST CONTROL	1	LS	\$ 5,000.00	\$ 5,000.00	0.94	\$ 4,700.00		0.03	\$ 150.00		0.03	\$ 150.00	
637.02	NPDES DISCHARGE PERMIT	1	LS	\$ 900.00	\$ 900.00	0.94	\$ 846.00		0.03	\$ 27.00		0.03	\$ 27.00	
690.01	24-INCH X 36-INCH HERCP CURED-IN-PLACE LINER	227	LF	\$ 400.00	\$ 90,800.00	146	\$ 58,400.00		40.5	\$ 16,200.00		40.5	\$ 16,200.00	
SUBTOTAL					\$ 1,029,417.50		\$ 958,936.50			\$ 35,902.00			\$ 35,902.00	
10% CONTINGENCY					\$ 102,941.75		\$ 95,893.65			\$ 3,590.20			\$ 3,590.20	
TOTAL AMOUNT					\$ 1,132,359.25		\$ 1,054,830.15			\$ 39,492.20			\$ 39,492.20	

SUB TOTAL	\$	1,132,359.25
CORFCD COSTS	\$	1,094,322.35
CITY OF LAS VEGAS COSTS	\$	39,492.20
TOTAL AMOUNT	\$	1,133,814.55