

APN # _____

Recorded at the Request of:

City Parkway V, Inc.
400 Stewart Avenue
Las Vegas, Nevada 89101

When Recorded, Return to:

Office of Business Development
City of Las Vegas
400 Stewart Avenue, 2nd Floor
Las Vegas, Nevada 89101

QUITCLAIM DEED

FOR A VALUABLE CONSIDERATION, receipt of which is hereby acknowledged, City Parkway V, Inc., a Nevada non-profit corporation, does hereby REMISE, RELEASE AND QUITCLAIM to the City of Las Vegas, a political subdivision of the State of Nevada, the real property in the City of Las Vegas, County of Clark, State of Nevada, described on Exhibit "A" attached hereto, together with all and singular tenements, hereditaments and appurtenances thereunto belonging or in anywise appertaining.

DATED this _____ day of _____, 2009.

CITY PARKWAY V, INC.

By: _____
Elizabeth N. Fretwell, President

Approved as to form:

J. Pentecello 4/23/09
Date

ACKNOWLEDGMENT

State of Nevada)
)ss.
County of Clark)

On this ____ day of _____, 2009, personally appeared before me, a Notary Public in and for said County and State, Elizabeth N. Fretwell, known to me to be the President of City Parkway V, Inc., and she acknowledged to me that she executed the same for and on behalf of City Parkway V, Inc. and she executed the said instrument freely and voluntarily and for the uses and purposes therein mentioned.

WITNESS my hand and official seal.

NOTARY PUBLIC in and for said County and State

Date: May 17, 2007
J. Rangel

Exhibit 'A'

Legal Description

PARCEL H-I

A PORTION OF LOT 5 AS SHOWN ON THAT CERTAIN PLAT ENTITLED "PARKWAY CENTER, A COMMERCIAL SUBDIVISION" RECORDED IN BOOK 53, PAGE 61 OF PLATS ON FILE AT THE CLARK COUNTY, NEVADA RECORDER'S OFFICE AND LYING WITHIN THE NORTHEAST QUARTER (NE 1/4) OF SECTION 33, TOWNSHIP 20 SOUTH, RANGE 61 EAST, CITY OF LAS VEGAS, CLARK COUNTY, NEVADA, M.D.M., DESCRIBED AS FOLLOWS:

COMMENCING AT THE CENTERLINE INTERSECTION OF GRAND CENTRAL PARKWAY AND BONNEVILLE AVENUE AS SHOWN ON SAID PLAT; THENCE ALONG THE CENTERLINE OF SAID BONNEVILLE AVENUE, NORTH $81^{\circ}09'57''$ EAST, 402.28 FEET; THENCE DEPARTING SAID CENTERLINE, NORTH $17^{\circ}53'58''$ EAST, 179.58 FEET TO THE BEGINNING OF A CURVE, CONCAVE SOUTHEASTERLY, HAVING A RADIUS OF 2,036.00 FEET; THENCE NORTHEASTERLY ALONG SAID CURVE, THROUGH A CENTRAL ANGLE OF $10^{\circ}06'52''$, AN ARC LENGTH OF 359.42 FEET; THENCE NORTH $28^{\circ}00'50''$ EAST, 16.20 FEET TO THE **POINT OF BEGINNING**; THENCE CONTINUING ALONG SAID LINE NORTH $28^{\circ}00'50''$ EAST, 509.48 FEET TO THE BEGINNING OF A CURVE, CONCAVE SOUTHERLY, HAVING A RADIUS OF 25.00 FEET; THENCE EASTERLY ALONG SAID CURVE, THROUGH A CENTRAL ANGLE OF $89^{\circ}54'26''$, AN ARC LENGTH OF 39.23 FEET; THENCE SOUTH $62^{\circ}04'44''$ EAST, 350.12 FEET TO THE BEGINNING OF A CURVE, CONCAVE WESTERLY, HAVING A RADIUS OF 30.00 FEET; THENCE SOUTHERLY ALONG SAID CURVE, THROUGH A CENTRAL ANGLE OF $89^{\circ}58'27''$, AN ARC LENGTH OF 47.11 FEET; THENCE SOUTH $27^{\circ}53'43''$ WEST, 469.20 FEET TO THE BEGINNING OF A CURVE, CONCAVE NORTHERLY, HAVING A RADIUS OF 30.00 FEET; THENCE WESTERLY ALONG SAID CURVE, THROUGH A CENTRAL ANGLE OF $84^{\circ}12'23''$, AN ARC LENGTH OF 44.09 FEET; THENCE NORTH $67^{\circ}53'54''$ WEST, 347.95 FEET TO THE BEGINNING OF A CURVE, CONCAVE EASTERLY, HAVING A RADIUS OF 30.00 FEET; THENCE NORTHERLY ALONG SAID CURVE, THROUGH A CENTRAL ANGLE OF $95^{\circ}54'44''$, AN ARC LENGTH OF 50.22 FEET TO THE **POINT OF BEGINNING**.

CONTAINING 5.08 ACRES, MORE OR LESS.




Basis of Bearings

NORTH 03°50'03" WEST, BEING THE BEARING OF A PORTION OF THE CENTERLINE OF GRAND CENTRAL PARKWAY AS SHOWN IN BOOK 53, PAGE 61 OF PLATS ON FILE AT THE CLARK COUNTY, NEVADA RECORDER'S OFFICE, CLARK COUNTY, NEVADA.

(SEE EXHIBIT 'B' ATTACHED HERETO AND BY THIS REFERENCE MADE A PART HEREOF)

END OF DESCRIPTION.


John E. Forsman, PLS
Professional Land Surveyor
Nevada License No. 10053



5-17-07



EXHIBIT 'B' TO ACCOMPANY LEGAL DESCRIPTION



GRAND CENTRAL PARKWAY

A PORTION OF LOT 5 AS
SHOWN IN BOOK 53, PAGE
61 OF PLATS
APN: 139-34-110-003

SEE
DETAIL ON
SHEET 4

POINT OF
BEGINNING

(BASIS OF BEARINGS)
(N03°50'03"W)

PARCEL A-2
(FILE 163,
PAGE 35
OF SURVEYS)
PARCEL A-1
(FILE 163,
PAGE 35 OF
SURVEYS)

PARCEL H/1
5.08 ACRES

UNION PACIFIC RAILROAD

BONNEVILLE AVENUE

POINT OF
COMMENCEMENT



SHEET 3 OF 5

HORIZON SURVEYS



9901 COVINGTON CROSS DRIVE, SUITE 120
LAS VEGAS, NEVADA 89144
PHONE (702)228-5066 FAX (702)228-0677
WWW.HORIZONSURVEYS.COM

EXHIBIT 'B' TO ACCOMPANY LEGAL DESCRIPTION

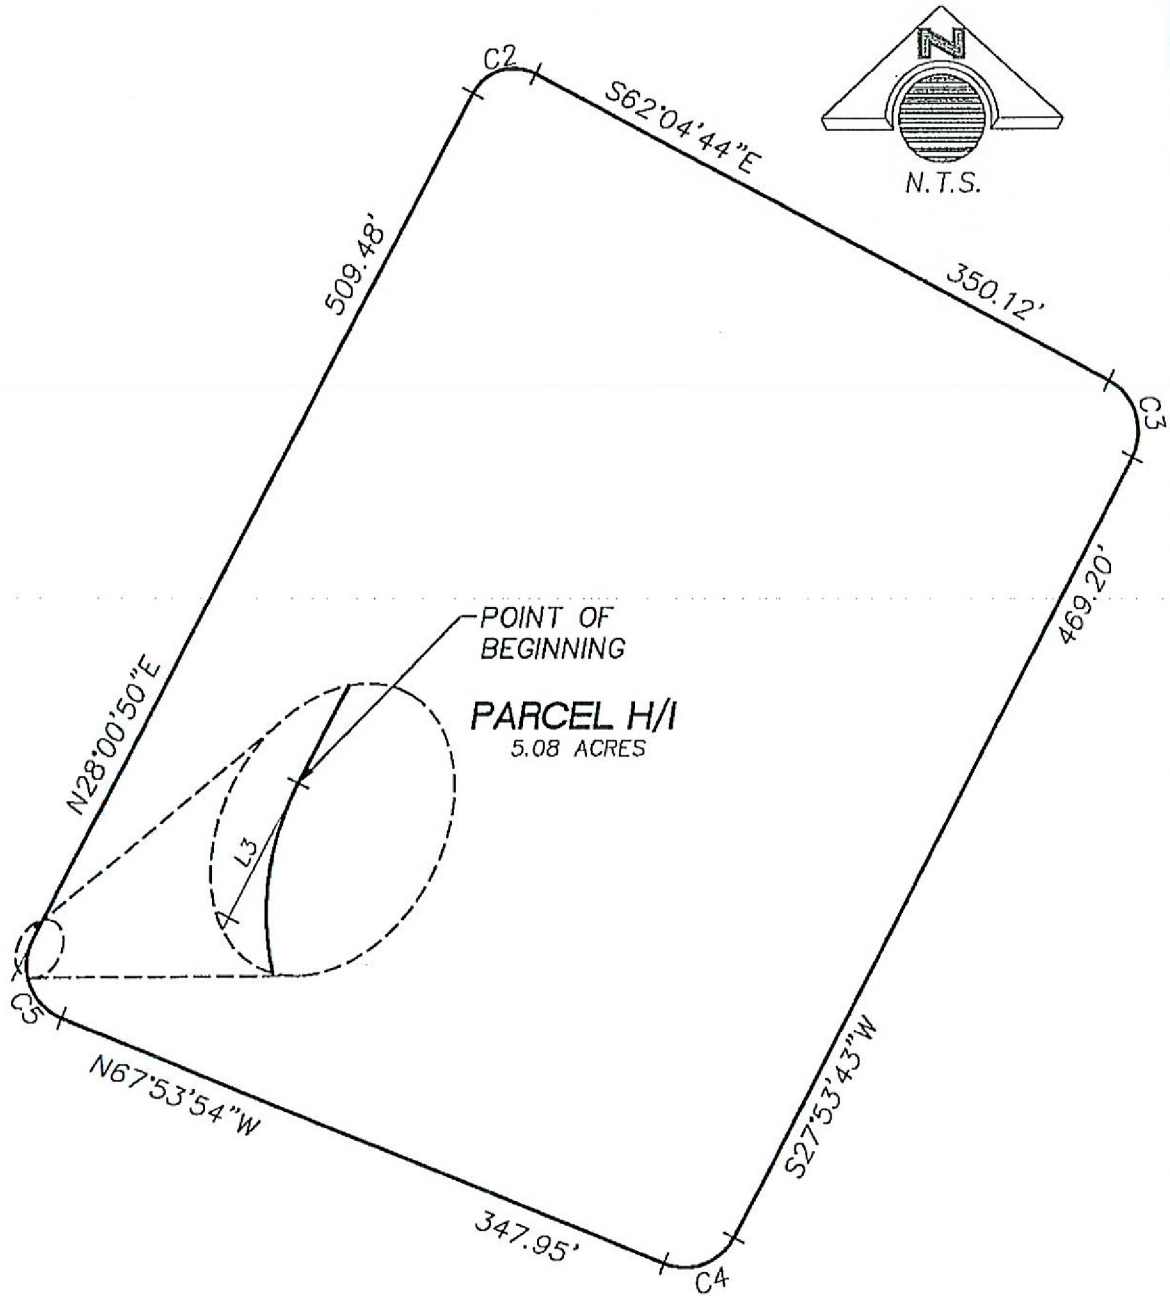

HORIZON SURVEYS



9901 COVINGTON CROSS DRIVE, SUITE 120
LAS VEGAS, NEVADA 89144

PHONE (702)228-5066 FAX (702)228-0677

WWW.HORIZONSURVEYS.COM

EXHIBIT 'B' TO ACCOMPANY LEGAL DESCRIPTION

LINE TABLE

LINE	BEARING	LENGTH
L1	N81°09'57"E	402.28'
L2	N17°53'58"E	179.58'
L3	S28°00'50"W	16.20'

CURVE TABLE

CURVE	RADIUS	DELTA	LENGTH	TANGENT
C1	2036.00'	10°06'52"	359.42'	180.18'
C2	25.00'	89°54'26"	39.23'	24.96'
C3	30.00'	89°58'27"	47.11'	29.99'
C4	30.00'	84°12'23"	44.09'	27.11'
C5	30.00'	95°54'44"	50.22'	33.27'

HORIZON SURVEYS



9901 COVINGTON CROSS DRIVE, SUITE 120
LAS VEGAS, NEVADA 89144

PHONE (702)228-5066 FAX (702)228-0677

WWW.HORIZONSURVEYS.COM