NextG Networks of California, Inc.

SPR1009NV-SUMN047M1
LAS VEGAS, NV 89138

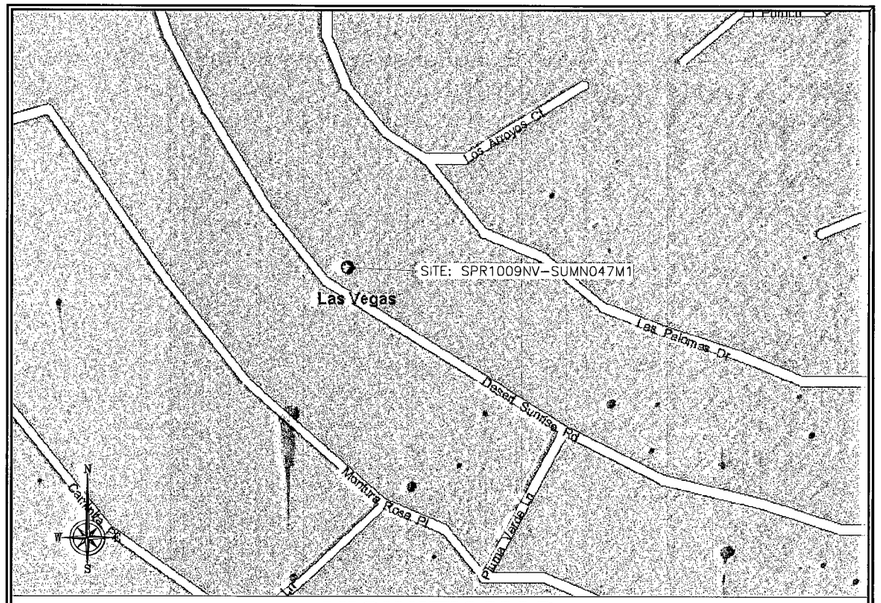

VICINITY MAP

DO NOT SCALE DRAWINGS

CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

GENERAL CONTRACTOR NOTES

PROPERTY INFORMATION

CUSTOMER:	NEXTG NETWORKS OF CA.,FORNIA, INC.
PROJECT:	SPR1009NV
NODE:	SPR1009NV-SUMN047M1
LATITUDE:	36.1621
LONGITUDE:	-115.36129
STREET ADDRESS:	12046 DESERT SUNRISE RD
CITY, STATE:	LAS VEGAS, NV 89138
APN #:	13734497004
POLE TYPE:	CONCRETE STREET LIGHT
RAD CENTER / ANTENNA HEIGHT:	31'-1"
ANTENNA TYPE:	1900BA
AZIMUTH FOR ANTENNA:	N/A
POWER TO POLE:	SECONDARY
POLE ACCESS:	ON ROAD
POLE OWNER:	N/A
POLE LOCATION & DESCRIPTION:	NW OF PLUMA VERDE LANE AND DESERT SUNRISE RD INTERSECTION

PROJECT SUMMARY

122831

ALL WORK AND MATERIALS SHALL BE PERFORMED AND INSTALLED IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE FOLLOWING CODES AS ADOPTED BY THE LOCAL GOVERNING AUTHORITIES. NOTHING IN THESE PLANS IS TO BE CONSTRUED TO PERMIT WORK NOT CONFORMING TO THE AREAS GOVERNING CODES.

1. STATE ADMINISTRATIVE CODE
2. STATE BUILDING CODE
3. ANSI/EIA-222-F LIFE SAFETY CODE NFPA-101-1990
4. STATE MECHANICAL CODE
5. STATE PLUMBING CODE
6. STATE ELECTRIC CODE
7. LOCAL BUILDING CODE
8. CITY/COUNTY ORDINANCES

CODE COMPLIANCE

THE PROJECT CONSISTS OF THE INSTALLATION AND OPERATION OF ANTENNAS AND ASSOCIATED EQUIPMENT CABINETS FOR NEXTG. THE INSTALLATION OF GROUND MOUNTED EQUIPMENT CABINETS, ANTENNAS ON AN EXISTING STREET LIGHT, WOOD POLE, TRAFFIC SIGNAL AND STEEL POLES.

PROJECT DESCRIPTION

CONTRACTOR		UTILITY COORDINATOR	
NAME:	HP COMMUNICATIONS INC.	NAME:	NEXTG NETWORKS
ADDRESS:	280 SUNPAC AVE #B	ADDRESS:	2216 OTOOLE AVE
CITY, STATE, ZIP:	HENDERSON, NV. 89011	CITY, STATE, ZIP:	SAN JOSE, CA. 95131
CONTACT:	DALE BARNHART	CONTACT:	JAY THOMAS
PHONE:	(951) 471-1919	PHONE:	(408) 954-1589
PROJECT MANAGER			
NAME:	NEXTG NETWORKS		
ADDRESS:	2216 OTOOLE AVE		
CITY, STATE, ZIP:	SAN JOSE, CA. 95131		
CONTACT:	JAY THOMAS		
PHONE:	(408) 954-1580		

Avoid overhead power line contact. it's costly.

Call before you OVERHEAD 1-702-227-2929

Call before you Dig
Avoid cutting underground utility lines. It's costly.

Call 811
OR
1-800-227-2600
AND
CLARK COUNTY TRAFFIC OPERATIONS
1-702-455-7544

SHEET	DESCRIPTION	REV.
1	TITLE SHEET	
2	RULE PRINCIPLES	
3	NODE CONSTRUCTION DESIGN	
4	TYPICALS 1	
5	TYPICALS 2	
6	TYPICALS 3	

SHEET INDEX

INSTALL/PLACE NEW FIBER OPTIC CABLE TO NEW OR EXISTING POLE. INSTALL EITHER MAXRAD OR KATHREIN SCALA ANTENNAS AND ALL ASSOCIATED BRACKETS IN ACCORDANCE TO CONSTRUCTION SPECIFICATIONS. REARRANGE ANY EXISTING FACILITIES IN ACCORDANCE TO GOVERNING CONSTRUCTION GUIDELINES.

PROJECT SCOPE

CITY OF LAS VEGAS
APPROVED FOR CONSTRUCTION
THIS APPROVAL IS FOR WORK IN CITY OF LAS VEGAS R/W OR CITY OF LAS VEGAS EASEMENTS ONLY. OBTAINING PERMISSION OR EASEMENTS FOR WORK SHOWN ON PRIVATE PROPERTY IS THE RESPONSIBILITY OF THE UTILITY.

Raul A. Jimenez 4/26/2010
APPROVAL DATE

H #37707 C.L.V. DWG. NO. 107U5421-TEC

NextG Networks of California, Inc.
2216 O'TOOLE AVE.
SAN JOSE, CALIFORNIA 95131
PHONE: (408) 954-1580

PROJECT INFORMATION:
SPR1009NV-SUMN047M1
LAS VEGAS, NV 89138

CURRENT ISSUE DATE:
03/10/2010

PERMIT SUBMISSION:

REV.:	DATE:	DESCRIPTION:	BY:

PLANS BY:
NextG Networks of California, Inc.
REP:

COMMENTS:

SHEET TITLE:
TITLE SHEET

SHEET NUMBER: **1** REVISION: **1 OF 6**