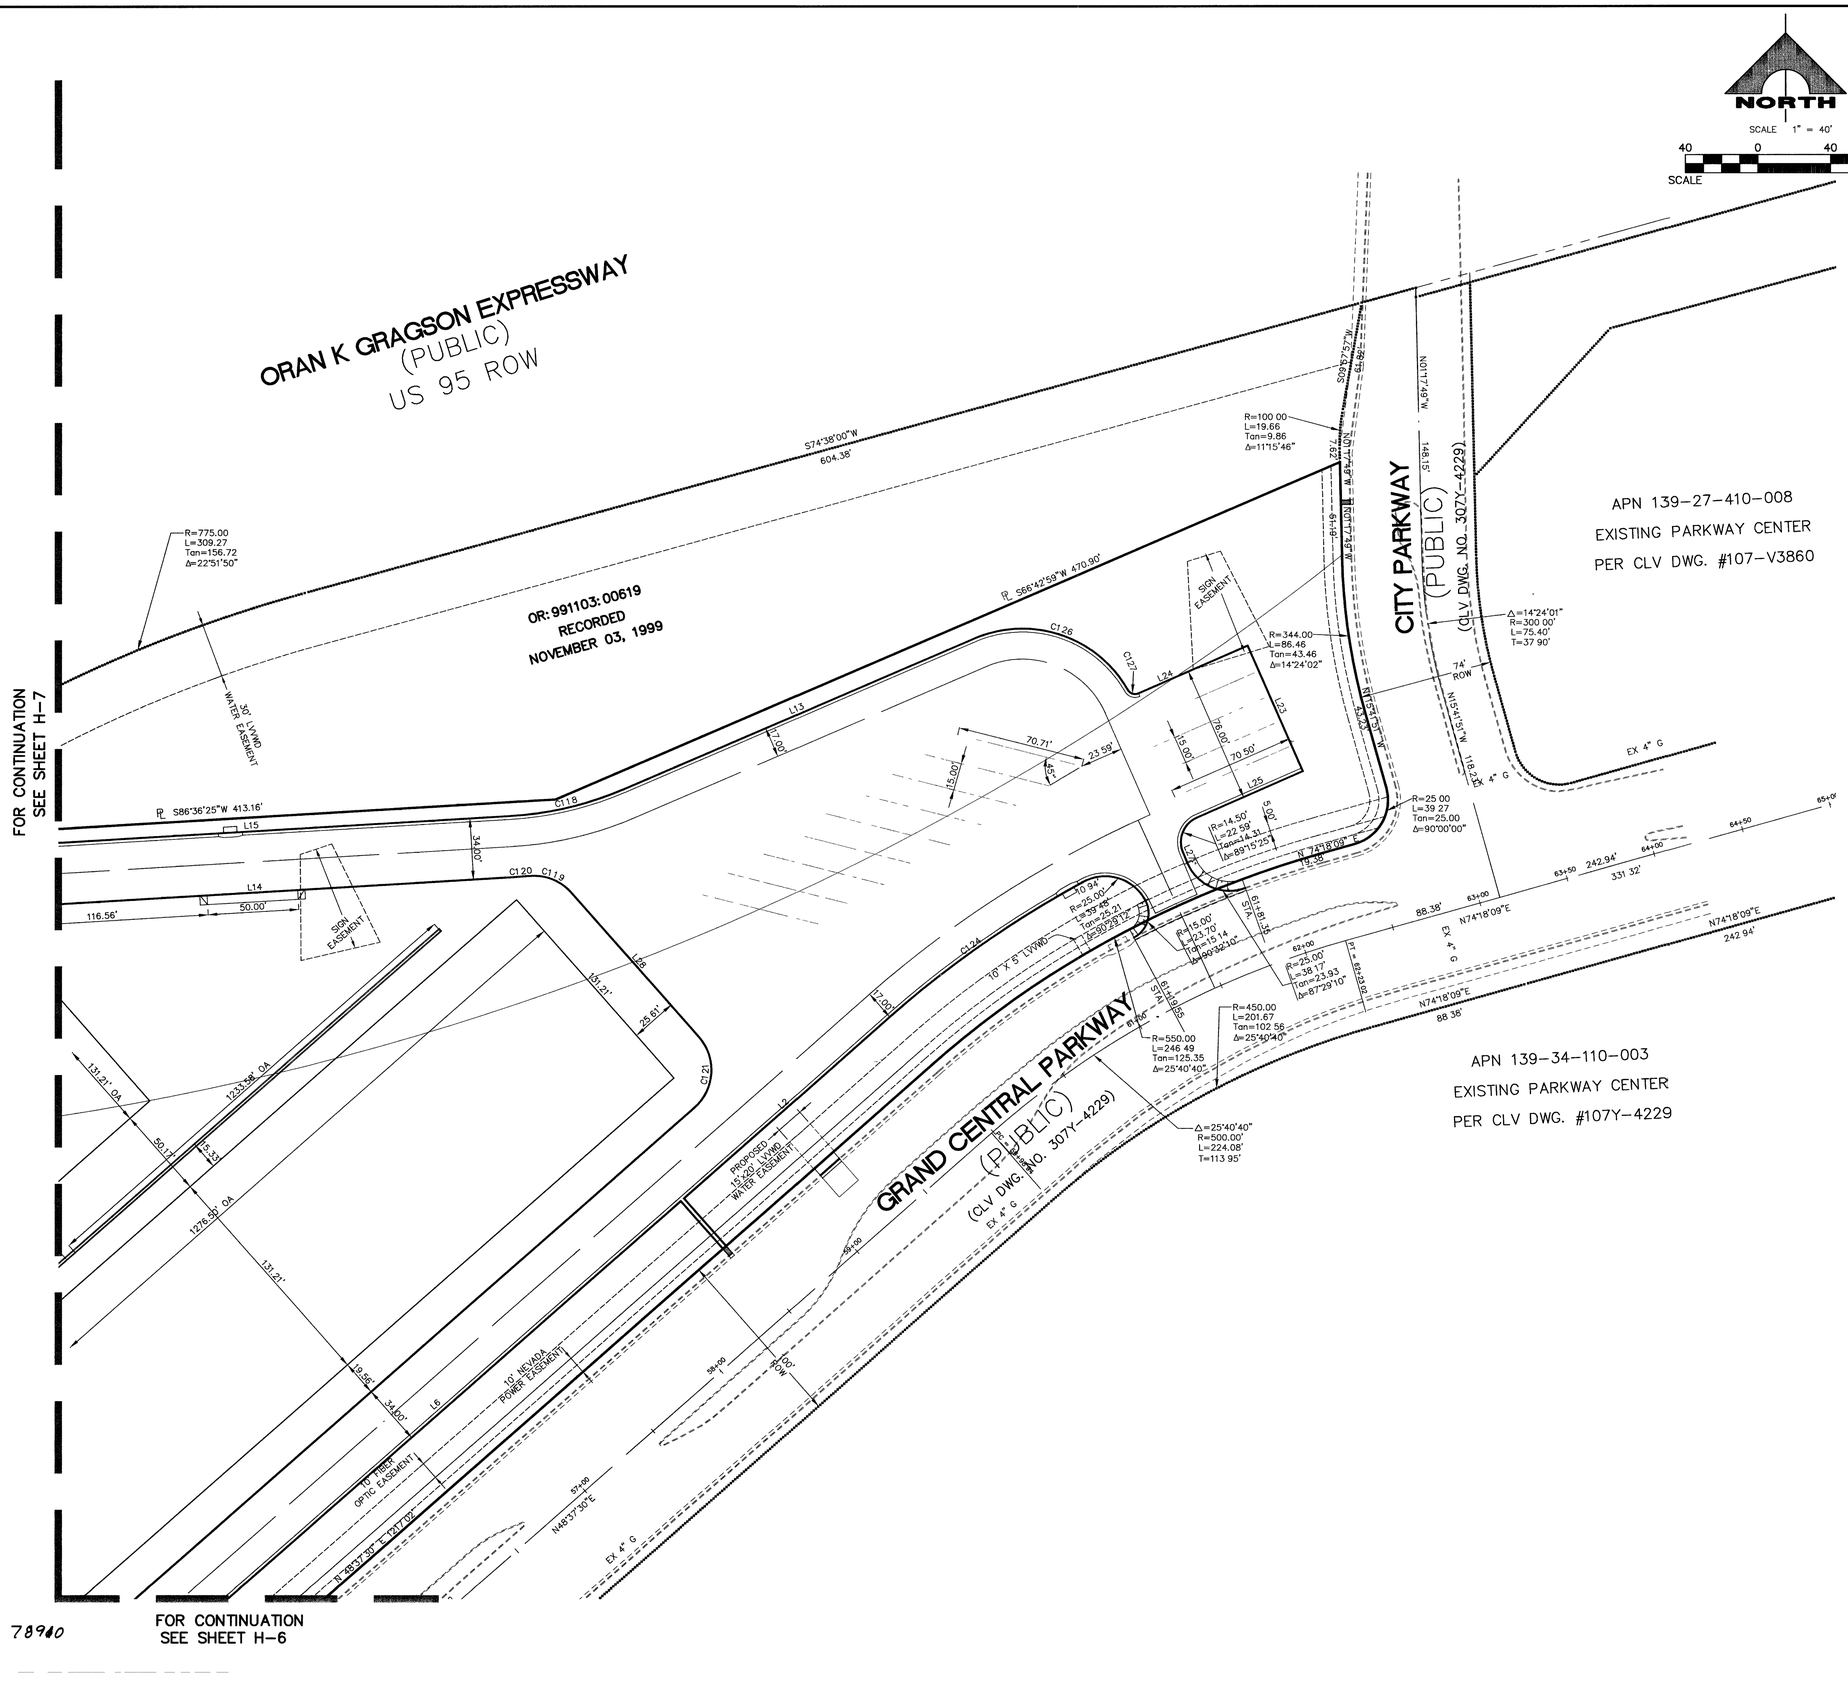

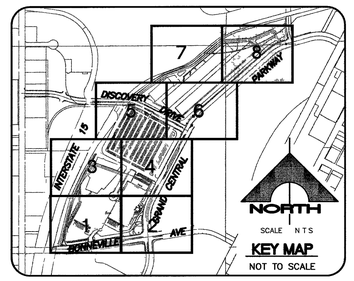

CURVE TABLE				
CURVE	LENGTH	RADIUS	TANGENT	DELTA
C118	63.53	183.00	32 09	19°53'26"
C119	25 96	27 50	14.04	54°05'00"
C120	7.82	217.00	3.91	2°03'55"
C121	43.20	27.50	27.50	90°00'00"
C124	119.73	585 00	60.07	11°43'34"
C126	97.91	67.00	60.04	83°43'35"
C127	8.61	4.50	4 06	84°10'20"

LINE TABLE		
LINE	LENGTH	BEARING
L2	151.13	N48°37'30"E
L6	347.37	N48°37'30"E
L13	211.04	N66°42'59"E
L14	286 44	S86°36'25"W
L15	286 44	S86°36'25"W
L23	76.00	N23°43'46"W
L24	65.87	N66°16'14"E
L25	64 04	N66°16'06"E
L26	0 41	S23°43'46"E
L27	6.28	N23°43'46"W
L28	106.16	S41°22'30"E

BASIS OF BEARINGS

N 24°55'16" E BEING THE BEARING OF THE CENTERLINE OF GRAND CENTRAL PARKWAY, LYING WITHIN THE N.E. 1/4 OF SECTION 33, TOWNSHIP 20 SOUTH, RANGE 61 EAST, M.D.M., CLARK COUNTY, NEVADA AS SHOWN BY MAP THEREOF ON FILE ON BOOK 53, PAGE 61 OF PLATS IN THE CLARK COUNTY RECORDER'S OFFICE, CLARK COUNTY, NEVADA.

BENCHMARK

CITY OF LAS VEGAS BENCHMARK NO. 2LV01 33C4, RIVET AND PLATE IN TOP OF CURB AT THE S.W. CORNER OF THE INTERSECTION OF ALTA DR. AND MARTIN LUTHER KING BLVD.
NAVD 88 CITY OF LAS VEGAS ELEVATION (1992)= 2046.76 (F)
CORRECTION TO CITY OF LAS VEGAS DATUM (2002): SUBTRACT 0.17' FROM 1992 DATUM

Avoid cutting underground utility lines. It's costly.
Call before you Dig.
1-800-227-2600
UNDERGROUND SERVICE (USA)

AVOID HITTING OVERHEAD POWER LINES. IT'S COSTLY
CALL BEFORE YOU DO OVERHEAD
1-702-227-2929

Call before you UnderGround
1-702-455-7511
1-702-229-6611

STATE OF NEVADA
PROFESSIONAL ENGINEER
ROY D. CLARK
No. 8354
Exp. 12/31/2006
DATE: 3/2/05

REV.	DATE	DESCRIPTION
		MYLAR SUBMITTAL

DESIGN:
DRAWN:
CHECK:
ISSUE DATE:
ISSUE EDITOR:
PLOT DATE: 04-05-05
PLOT TIME: 11:38:24

ISSUE DATE: 3-29-05

G.C. WALLACE, INC.
Engineers/Planners/Surveyors
1555 SOUTH RAINBOW BLVD./LAS VEGAS, NEVADA 89146
TELEPHONE: (702) 804-2000 • FAX: (702) 804-2299
GBarnhart

G:\619-295\dwg\Comm\Improv\WMKTch08.dwg

WORLD MARKET CENTER
PHASE 1A

WMC ASSOCIATES, LLC

HORIZONTAL CONTROL PLAN 8

DRAWING
H-8
10 OF 35 SHTS

cw2436.dwg 030924.wes