



Special Historic Preservation Commission Agenda

1. **Call to Order and Roll Call**
2. **Announcement Regarding: Compliance with Open Meeting Law**
3. **Public Comment:** Comment during this portion of the agenda must be limited to matters on the agenda for action. If you wish to be heard, come forward and give your name for the record. The amount of discussion, as well as the amount of time any single speaker is allowed, may be limited.
4. Chair's announcement relative to the Historic Preservation Commission
5. For possible action to approve the Final Minutes by reference of the Regular Meeting of December 8, 2021
6. **21-0417-HPC1 - ABEYANCE ITEM** - Discussion for possible action regarding accepting the final revised version of "The City of Las Vegas Historic Resource Survey Catalog" from Nevada Preservation Foundation
7. **22-0006-HPC1** - Discussion for possible action regarding approval of the submission of a grant request in the amount of \$75,000 to the Commission for the Las Vegas Centennial in order to support a variety of historic preservation initiatives lead by the Historic Preservation Commission
8. **22-0008-HPC1** - Discussion for possible action regarding approval of the submission of a grant request in the amount of \$50,000 to the National Park Service Underrepresented Community Grant Program in order to hire a consultant to conduct a Historic Context and Reconnaissance Level Survey of a study area identified as Rafael Rivera, located in East Las Vegas, generally bounded by Bruce Street, Wengert Avenue, Mojave Road and Interstate-515 - Ward 3 (Diaz)
9. **22-0009-HPC1** - Report by the Department of Planning regarding an update on the Strategic Neighborhood Outreach Program
10. **22-0010-HPC1** - Report by the Department of Planning regarding background information on the John S. Park Historic District listing
11. **22-0011-HPC1** - Report by the Department of Planning regarding Director's updates
12. **22-0012-HPC1** - Report by the Department of Planning regarding Project Update List
13. **22-0013-HPC1** - Report by the Department of Planning regarding historic and archaeological resources in local media
14. **22-0014-HPC1 - Discussion regarding topics for future agenda items by the Historic Preservation Commission.** Comments made during this portion of the agenda by individual Commission Members shall refer solely to proposals for future agenda items and any discussion shall be limited to whether or not any such proposed item(s) is/are within the purview of the Commission and/or whether such proposed item(s) shall be placed on a future agenda. No discussion regarding the substance of any such proposed topic shall occur and no action shall be taken regarding the proposal.
15. **Citizens Participation:** Public comment during this portion of the agenda must be limited to matters within the

jurisdiction of the Commission. No subject may be acted upon by the Commission unless that subject is on the agenda and is scheduled for action. If you wish to be heard, come forward and give your name for the record. The amount of discussion on any single subject, as well as the amount of time any single speaker is allowed, may be limited.

16. **Adjournment**

Facilities are provided throughout City Hall for the convenience of persons with disabilities. Reasonable efforts will be made to assist and accommodate persons with disabilities or impairments. If you need an accommodation to attend and participate in this meeting, please call the City Clerk's office at 702-229-6311 and advise of your need at least 48 hours in advance of the meeting. Dial 7-1-1 for Relay Nevada.

THIS MEETING HAS BEEN PROPERLY NOTICED AND POSTED AT THE FOLLOWING LOCATIONS
IN ACCORDANCE WITH THE NOTICING STANDARDS AS OUTLINED IN NRS 241.020:

The City of Las Vegas website – www.lasvegasnevada.gov

The Nevada Public Notice website – notice.nv.gov

City Hall, 495 South Main Street, 1st Floor

City of Las Vegas

AGENDA MEMO **SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF:** **JANUARY 27, 2022**

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☒ **Action**
☐ **Report**

SUBJECT:

21-0417-HPC1 - ABEYANCE ITEM - Discussion for possible action regarding accepting the final revised version of "The City of Las Vegas Historic Resource Survey Catalog" from Nevada Preservation Foundation

PURPOSE/BACKGROUND:

The Nevada Preservation Foundation (NPF) was awarded Contract No. 210031-JH on November 19, 2020 to create a Reference Survey Catalog of historic surveys and reports that were previously conducted and currently in-progress within the city limits of Las Vegas.

The second draft catalog was reviewed by the members of the Historic Preservation Commission who provided their feedback and requested edits during the August 25, 2021 meeting. Separately, the State Historic Preservation Office (SHPO) also provided feedback on the second draft. The Commission required further edits to the second draft and requested NPF return for the October 27, 2021 meeting with the final version of the catalog.

RECOMMENDATION:

Staff recommends APPROVAL.

BACKUP DOCUMENTATION:

1. FOURTH DRAFT City of Las Vegas Historic Resource Catalog



CITY OF LAS VEGAS HISTORIC RESOURCE CATALOG - DRAFT

PREPARED BY NEVADA PRESERVATION FOUNDATION

CITY OF LAS VEGAS HISTORIC RESOURCE CATALOG

PREPARED FOR:

City of Las Vegas
495 S. Main St.
Las Vegas, NV 89101

PREPARED BY:

Nevada Preservation Foundation
330 W. Washington Avenue, Ste. 106
Las Vegas, NV 89106



SEPTEMBER 2021 - DRAFT

CITY OF LAS VEGAS

HISTORIC PRESERVATION COMMISSION

Commissioner Robert Stoldal - Chairman
Commissioner Michelle Larime – Vice Chair
Commissioner Jack LeVine – Member
Commissioner Colleen M. Beck – Member
Commissioner Donald L. Hotchkiss Jr. – Member
Commissioner Richard Serfas – Member
Commissioner Sondra Cosgrove – Member
Commissioner Mia Palencar – Member
Commissioner Craig Palacios – Member
Commissioner Rhonda Long – Member
Commissioner Todd L. Moody – Member
Commissioner Hollis J. Gillespie – Member
Dr. Diane Siebrandt - Historic Preservation Officer
Mr. Seth T. Floyd - Director of Community Development
Mr. Michael Howe - Planning Section Manager
Mr. Phillip Byrnes – Deputy City Attorney

“This project has been financed with funding from the City of Las Vegas’s Historic Preservation Commission through a grant from the National Park Service’s Historic Preservation Fund (HPF) grants-in-aid program, a division of the United States Department of the Interior and administered by the State Historic Preservation Office. The contents and opinions, however, do not necessarily reflect the views or policies of the United States Department of the Interior or the State Historic Preservation Office.”

“The HPF grants-in-aid program receives Federal financial assistance for identification and protection of historic properties. Under Title VI of the Civil Rights Act of 1964, Section 504 of the Rehabilitation Act of 1973, and the Age Discrimination Act of 1975, as amended, the U.S. Department of the Interior prohibits discrimination on the basis of race, color, national origin, disability, or age in its federally assisted programs. If you believe you have been discriminated against in any program, activity, or facility as described above, or if you desire further information, please write to: Office of Equal Opportunity, National Park Service, 1849 C Street N.W., Washington, D.C. 20240.”

Executive Summary	8
Project Scope	9
Research Methodology	10
Historic Resource Catalog	20
Ward 1	28
Ward 2	32
Ward 3	34
Ward 4	81
Ward 5	83
Ward 6	123
Multiple Wards	138
Appendix	171
A: NRHP List	172
B: Nevada State Register	174
C: City of Las Vegas Local Register	177
D: Glossary of Terms	179
E: NRB 15 (Section II and V)	184

Figure 1: Past Historic Resource Studies	11
Figure 2: Contact List	18
Figure 3: File Maker Pro Catalog	20
Figure 4: Historic Resource Catalog Fields	21
Figure 5: Historic Resource Catalog	22
Figure 6: City Council Ward Map	27, 139
Figure 7: Ward 1 Map	29
Figure 8: Ward 2 Map	33
Figure 9: Ward 3 Map	35
Figure 10: Ward 4 Map	82
Figure 11: Ward 5 Map	84
Figure 12: Ward 6 Map	124

THIS PAGE LEFT INTENTIONALLY BLANK

Executive Summary

Nevada Preservation Foundation (NPF), under contract with the City of Las Vegas, compiled a catalog of historic resource reports spanning a range of types including historic resource surveys, section 106 reviews, archeological studies, historic contexts, national, state, and local register nominations, historic structures reports, historic inventories, and planning/redevelopment studies within city limits.

Between February and May 2021, a total of 129 reports were sourced from multiple repositories, including the City of Las Vegas, the Nevada State Historic Preservation Office, the Nevada Historical Society, and the University of Nevada Las Vegas and Reno Special Collections. Authors and contractors of previous preservation studies were contacted, as well as local preservation organizations, to source new and/or updated studies conducted within city limits.

A comprehensive FileMaker Pro database was developed to index the catalog by City wards, with source information such as: the title of the report, date of study, type of report, description, findings, and author contact information, among additional information and notes. A PDF file of each non-restricted report is included with each catalog record, with a preview window and download accessibility. A user-friendly printable catalog is included in this report, indexed by City ward, with the corresponding source information.

The catalog provides City staff, the Historic Preservation Commission, and the public with a comprehensive bibliography of historic resource studies to inform future historic preservation planning initiatives or research projects in the City of Las Vegas.

Project Scope

The City of Las Vegas hired NPF to conduct a comprehensive literature review on the topic of historic property surveys and studies within the city limits of Las Vegas. NPF was required to:

1. Identify and compile a list of completed and in-progress studies of historic properties located within the city limits of Las Vegas and obtain electronic copies of each survey.
2. Review the studies and identify any required updates for structures and/or properties dating from the city's prehistoric period up to 1939. (This portion of the project has been extended to February 2022)
3. Produce a comprehensive reference catalog of completed and in-progress historic studies.

NPF created a comprehensive FileMaker Pro database of all preservation studies that have been completed or are currently in-progress. The catalog is indexed by City ward based on the project location and includes the following resource information:

- A. The name or title of the survey
- B. The date of the survey
- C. The organization that completed, or is completing the survey as well as the organization's contact information
- D. SHPO and NRIS report numbers
- E. Lead Agency involved in the project
- F. A brief description of the study/project
- G. Findings of the study/project
- H. A notation if the survey required updating
- I. Any notes applicable to the final report

Research Methodology

NPF began the literature review by analyzing the seventy-two (72) studies provided by the City of Las Vegas, as listed in Figure 1. A complete assessment of the agencies authoring those studies was conducted to identify any missing reports and to identify any in-progress studies.

NPF located 60 additional studies conducted within City limits including historic resource inventories and surveys, section 106 reviews, archeological studies, historic contexts, national, state, and local register nominations, historic structures reports, historic inventories, and planning/redevelopment studies, in multiple repositories across the state. Between February and May 2021, a complete records search of archival databases, as well as in-person research was conducted as listed in Figure 2.

Note: In-person research was limited due to COVID-19 safety protocols. Most of the archival research was conducted online via government, non-government, and academic search repositories.

Figure 1: Initial project list provided by the City of Las Vegas

Past Historic Resource Studies

Updated 12/10/2020

Year	Survey	Report Available	Publisher or Author
1971	Las Vegas Mormon Fort National Register of Historic Places Nomination	Yes electronic version – no hard copy	City of Las Vegas
1975	The General Plan for the City of Las Vegas	Not in hard copy or in electronic database but it has been referenced in other material so it exists someplace	Unknown
1977	Las Vegas Springs (Springs Preserve) National Register of Historic Places Nomination	Not in hard copy or electronic database – Listed on National Register so there is a report and/or survey - date of report could also be 1978	Unknown
1978	Historic Preservation Inventory & Planning Guidelines for the City of Las Vegas	Yes hard copy and electronic version	Charles Hall Page & Associates, Inc.
	Archaeological Element Historic Preservation Assessment and Planning Process	Yes hard copy and electronic version	Department of Anthropology UNLV
	Floyd Lamb Park Archaeological, Historical and Paleontological Survey	Yes electronic version – no hard copy	The Archaeological Research Center, Museum of Natural History UNLV
	Floyd Lamb Park Structural Survey I	Yes electronic version – no hard copy	Vhay & Ferrari, LTD. Architects
	Floyd Lamb Park Structural Survey II	Yes electronic version – no hard copy	Vhay & Ferrari, LTD. Architects
	Floyd Lamb Park Equestrian Facilities Master Plan	Yes electronic version – no hard copy *No date on this report so only possibly 1978	The Moffitt Partnership Architects and Constructors
	Westside School National Register of Historic Places Nomination	Yes electronic version – no hard copy	Economic Opportunity Board of Clark County
1981	Floyd Lamb Park at Tule Springs National Register of Historic Places Nomination	Yes electronic version – no hard copy	Southern Nevada Historical Society

1982	United States Post Office and Courthouse National Register of Historic Places Nomination	Yes electronic version – no hard copy	Fraser Design
1985	Historical Resources of Central Las Vegas: Volumes I and III	Yes hard copy - no electronic version. Note: Vol. II is missing, will need to be sourced.	Nevada Historical Society
1986	Las Vegas High School Academic building and Gymnasium National Register of Historic Places Nomination	Yes electronic version – no hard copy	Kathryn Kuranda
1987	Railroad Cottage Historic District National Register of Historic Places Nomination	Yes electronic version – no hard copy	Linda McCulland
1988	Las Vegas High School Neighborhood Survey	Yes hard copy and electronic version	Nevada State Museum & Historical Society
	Fifth Street School National Register of Historic Places Nomination	Yes electronic version – no hard copy	Nevada State Museum & Historical Society
1989	West Las Vegas Development Analysis and Strategy	Yes hard copy - no electronic version	Laventhol & Horwath/The SWA Group/Barton-Aschman Associates, Inc.
1990	Las Vegas High School Neighborhood Historic District National Register of Historic Places Nomination	Yes electronic version – no hard copy	Division of Historic Preservation and Archaeology
1992	Floyd Lamb Park Building Survey	Yes electronic version – no hard copy	HSA Architects. Inc.
	Moulin Rouge National Register of Historic Places Nomination	Yes electronic version – no hard copy	Nevada State Museum & Historical Society
	Little Church of the West	Yes electronic version – no hard copy	Susan E. Ramey

1993	Floyd Lamb Park Cultural Resource Investigation	Yes electronic version – no hard copy	Harry Reid Center for Environmental Studies, UNLV
	Green Shack National Register of Historic Places Nomination	Yes electronic version – no hard copy	Nevada State Museum & Historical Society
	Huntridge Theater National Register of Historic Places Nomination	Yes electronic version – no hard copy	Huntridge Performing Arts Theater
1994	West Las Vegas Plan	Yes hard copy - no electronic version	The City of Las Vegas
1997	The Next Close Area: A Reconnaissance Level Survey of Historic Buildings around Eighth and Ogden Streets	Yes hard copy and electronic version	Paul G. Chace & Associates
2001	SDASHA City Center Apartment Complex: Historic Resource Inventory Forms	Yes hard copy and electronic version	City of Las Vegas Neighborhood Services Department
	Binions Casino Historic Resource Inventory	Yes electronic version – no hard copy	Knight & Leavitt Associates, Inc.
	SDASHS City Center Apartment Complex: Historic Resource Inventory Forms	Yes hard copy and electronic version	City of Las Vegas Neighborhood Services Department
	Old Spanish Trail National Register of Historic Places Nomination	Yes electronic version – no hard copy	Nevada State Historic Preservation Office
2002	Downtown Las Vegas: Historic Resource Survey and Inventory:	Yes hard copy and electronic version	20 th Century Preservation
	Fixed Guideway Project, Area of Effect Historic Properties Survey	Yes electronic version – no hard copy	Knight & Leavitt Associates, Inc.
	John S Park Historic District National Register of Historic Places Nomination	Yes hard copy and electronic version	20 th Century Preservation
	North Ninth Street Elementary School Historic Resource Survey Report	Yes hard copy and electronic version	20 th Century Preservation
	Mayfair Homes Tract 1 and 2: Historic Resource Survey and Inventory	Yes hard copy and electronic version	20 th Century Preservation

2003	Biltmore Homes: Historic Resource Survey and Inventory	Yes hard copy and electronic version	20 th Century Preservation
	West Las Vegas: Historic Resource Survey and Inventory	Yes hard copy and electronic version	20 th Century Preservation
	Beverly Green/Southridge Neighborhood Plan	Yes hard copy – no electronic version	City of Las Vegas?
	Clark Avenue (Bonanza Road) Railroad Underpass: National Register of Historic Places Nomination	Yes hard copy and electronic version	City of Las Vegas
	Fremont Street Entertainment District: Windshield Survey for Historic Resources	Yes hard copy - no electronic version	City of Las Vegas
2005	Wedding Chapels of Downtown Las Vegas Blvd: Historic Resource Survey and Inventory	Yes hard copy and electronic version	Painter Preservation & Planning
	Berkley Square Historic Resource Survey	Yes hard copy and electronic version	Painter Preservation & Planning
	Huntridge Tracks 1 and 2 Historic Resource Survey and Inventory	Yes hard copy and electronic version	Painter Preservation & Planning
2006	Fremont Street Cultural Resources Inventory and Report	Yes hard copy is May 2006 and electronic version is revised October 2006	Painter Preservation & Planning
	Las Vegas Main Street Historic District: National Register of Historic Places Nomination	No – have bits and pieces electronically but not full report - no hard copy	Civic Visions
	Woodlawn Cemetery National Register of Historic Places Nomination	Yes hard copy and electronic version	Joe Thomson under the City of Las Vegas Planning and Development Department
2007	Stupak Historic Resources Survey	Yes hard copy and electronic version	RAFI Planning, Architecture & Urban Design
	I-15 Corridor Improvement US 95 to Apex Historic Properties Survey	Yes electronic version – no hard copy	Knight & Leavitt Associates, Inc.
	I-15 Corridor Sloan Rd to Tropicana Ave Historic Architectural Survey Report	Yes electronic version – no hard copy	Parsons
	US 95 Northwest: Washington Ave to Kyle Canyon Rd	Yes hard copy and electronic version but electronic version	Parsons

		is not one continuous document	
	Neon Boneyard Historic Resources Survey and Inventory (Part I and II)	Yes electronic version – no hard copy	Tec, Inc.
	Floyd Lamb Park Master Plan	Yes hard copy and electronic version – but electronic version does not include the maps as one continuous document	Greenways Incorporated & JW Zunino & Associates
2008	I-15 Project Neon from Sirius Ave to W Bonanza Blvd Architectural Inventory	Yes electronic version - no hard copy	Environmental Services Division: Archaeology Section, Nevada DOT
	McKnight Village Senior Homes Historic Resource Survey Phase I and II	Yes hard copy and electronic version	RAFI Planning, Architecture & Urban Design
	Berkley Square Neighborhood: National Register of Historic Places Nomination	Yes electronic version - no hard copy	Painter Preservation & Planning
2009	The Alta Vista, Acres, Oakridge Tracts Survey and Inventory	Yes hard copy and electronic version	Kautz Environmental Consultants, Inc.
	Westleigh Neighborhood Historic Survey	Yes hard copy and electronic version	Painter Preservation & Planning
	Floyd Lamb Park at Tule Springs Historic Survey	Yes hard copy is a 2008 draft – electronic version is final 2009 report	HHM Inc.
2010	H & Monroe Senior Apartments Historic Resource Survey	Yes hard copy and electronic version	20 th Century Preservation
	Huntridge and Southridge Tracts: Phase II Survey and Inventory	Yes hard copy and electronic version	Kautz Environmental Consultants, Inc.
	Lorenzi Park National Register of Historic Places Nomination	Yes hard copy is 2007 and electronic version is updated 2010	Angela Moor
2011	Beverly Green Neighborhood Survey and Inventory Phase I	Yes hard copy and electronic version	Kautz Environmental Consultants, Inc.
	Neon Museum Visitor Center Determination of Eligibility and Finding of Effect Report	Yes hard copy and electronic version	Chattel Architecture, Planning & Preservation, Inc.
	Historic Westside School Master Plan	Yes hard copy and electronic version	City of Las Vegas/KME

			Architects/Hamilton Anderson Associates
2012	Beverly Green Neighborhood Survey and Inventory Phase II	Yes hard copy and electronic version	Logan Simpson Design Inc.
	El Cortez Hotel and Casino National Register of Historic Places Nomination	Yes electronic version – no hard copy	Peter Moruzzi
	Morelli House National Register of Historic Places Nomination	Yes electronic version – no hard copy	Junior League of Las Vegas
2013	Beverly Green Neighborhood Survey and Inventory Phase III	Yes hard copy and electronic version	Logan Simpson Design Inc.
	Victory Hotel: Historic Building Condition Assessment Report and Preservation Plan	Yes hard copy and electronic version	Logan Simpson Design Inc.
2014	Huntridge Neighborhood Historic Resource Survey and Inventory Phase II	Yes hard copy and electronic version	ICF International
	Harrison's Guest House National Register of Historic Places Nomination	Yes electronic version – no hard copy	Mella Rothwell Harmon
2015	World War II Era Residential Housing in Las Vegas	Yes hard copy and electronic version	Logan Simpson Design Inc.
	La Concha Motel Lobby State Register of Historic Places Nomination	Yes hard copy and electronic version	Nevada State Historic Preservation Office
2016	Reed Whipple Cultural Center National Register of Historic Places Nomination	Yes electronic version – no hard copy	North Wind Resource Consulting
2017	Huntridge: National Register of Historic Places Eligibility Assessment of the WWII Era Neighborhood	Yes hard copy and electronic version	North Wind Resource Consulting
	Las Vegas High School Historical Assessment & Feasibility Study	Yes hard copy and electronic version	Larry Barr for Las Vegas High School Alumni Association

2020	Mid-Century Modern Motor Courts Historic Survey: Architectural Survey of Motor Court Motels along Las Vegas Blvd and Fremont Street	Yes hard copy and electronic version	North Wind Resource Consulting
	Historic Westside Neighborhood: A Brief History of Redevelopment Efforts	Yes electronic version – no hard copy	North Wind Resource Consulting

Figure 2: Literature Review Contact List

CONTACT LIST

Organization	Contact	Date	Result
City of Las Vegas	Dr. Diane Siebrandt, Historic Preservation Officer	December 2020: List and copies of initial studies/reports	Received initial list of 72 studies/reports from Dr. Siebrandt.
		April 4 – June 10, 2021	Correspondence regarding local register nominations. Sourced list of locally designated properties and 2 additional reports/studies.
Nevada State Library, Archives and Public Records, Carson City, NV	Online Research: https://nsla.nv.gov/home	Feb-21	No additional reports/studies sourced.
UNLV's Department of Anthropology	Dr. Daniel Benyshek, Director Karen Harry, staff	2/25/2021	No additional reports/studies sourced.
Page & Turnbull, previously Charles Hall Page & Associates, Inc.	Ruth Todd, Sacramento Office Director Christian Dika, Staff	2/25/2021	No additional reports/studies sourced.
Nevada Archeological Association	Sarah Branch, NAA Treasurer	2/25/2021	No additional reports/studies sourced.
Preservation Association of Clark County	Joe Thomson, staff	2/25/2021	No additional reports/studies sourced.
Bureau of Land Management	Online Research General Lands Office Records: https://glorerecords.blm.gov/ Bureau of Land Management National NEPA Register: https://eplanning.blm.gov/eplanning-ui/home	Apr-21	No additional reports/studies sourced.
Nevada State Museum, Las Vegas	Online Research: https://www.lasvegasnmuseum.org/research/	Apr-21	No additional reports/studies sourced.
The UNLV Harry Reid Center	David Hatchett, Executive Director	4/4/2021	No response
Nevada Department of Transportation	Program and Study Reports webpage: https://www.dot.nv.gov/projects-programs/programs-studies	04/06/2021: Website accessed	No additional reports/studies sourced.
Painter Preservation	Diana Painter, Owner	4/4/2021	No response
Southern Nevada Archaeological Archive, DRI	Jeffrey Wedding, Archive Manager	4/10/2021	No additional reports/studies sourced. Recommended SHPO NVCRIS as best resource.
Knight & Leavitt Associates, Inc	Annette J. Thompson, Principal Investigator	4/12/2021	Knight & Leavitt provided the City with hard copies of "The Historic Properties Survey Fixed Guideways Project Area of Effect Clark County, Nevada," including the final report, HRIF's, and photographs.
		5/31/2021	
Nevada State Historic Preservation Office	Karyn de Dufour, NVCRIS Manager Kristen Brown, Architectural Historian Special Historic Preservation Commission	04/15/2021: email and call with Karen re. project scope	Received 57 reports from SHPO.
		January 27, 2022	SHPO reports acquired

Organization	Contact	Date	Result
		June 8 – July 19, 2021	Interaction regarding missing/incomplete reports with Kristen and Karyn.
National Park Service	Online Research National Archives Catalog: https://catalog.archives.gov/search?q=*&f.parentNald=20812721&f.level=fileUnit&sort=titleSort%20asc	April - May 2021	Identified Springs Preserve NRHP nomination and Las Vegas Main Street NRHP nomination.
	General email inquiry	5/10/2021	Request for NHRP report #78001719 (Springs Preserve NRHP nomination). Request denied due to restriction.
University of Nevada, Las Vegas, Special Collections	Su Kim Chung, Head of Public Services UNLV Special Collections website: https://www.library.unlv.edu/speccol	April – May 2021: online research	Online research and in person visit to special collections. Sourced 6 reports.
		04/11/2021: initial contact with Su Kim	
		05/19/2021: visit special collections	
		May 20 – June 10, 2021: Request for PDF scans	
University of Nevada, Reno, Special Collection	Laura E. Roche, Digital Access Archivist UNR Special Collections website: https://library.unr.edu/specoll	April-May 2021: Online research	Sourced 3 Reports.
		May 13- 27, 2021: Request for PDF scans	
Library of Congress	Online Search Historic American Buildings Survey/Historic American Engineering Record/Historic American Landscapes Survey: https://www.loc.gov/pictures/collection/hh/	May-21	No additional reports/studies sourced.
Nevada Preservation Foundation	Mariana Ruiz, Director of Preservation Services	n/a	Provided update on the Biltmore Bungalows survey and a copy of the Wengert House local nomination.

Historic Resource Catalog

A FileMaker Pro database has been created to catalog the historic resource studies identified in the literature review. The catalog has been indexed by City Ward based on the project location for each study. Each record includes the information detailed in Figure 4.

Additionally, each record contains a non-restricted PDF file of each report, as well the ability to download a copy to a hard drive. The database is formatted for desktop viewing with the ability for website integration, at the discretion of the City of Las Vegas' Communication Department. Figure 3 depicts the record structure of the FileMaker Pro database.

FileMaker's user-friendly search engine allows the user to efficiently locate a specific report or browse through the catalog. It can be customized to include any additional information or link to a future GIS database.

Content Details

Send by Email

City of Las Vegas Historic Resource Reports

Title

Project Neon: A Historic Architectural Survey of 3.25 Miles (3,016.7 Acres) Along I-15 for Proposed Freeway Improvements Between US 95 and Edna

Type

Section 106 Review

Project Year

2007

Report Date

03/17/2008

Study Area

I-15, from US 95 to Sahara Ave

Ward

M-1,3,5

SHPO Report #

5978

NRIS #

n/a

Federal Agency

FHWA

Prepared for

Nevada Department of Transportation

Author

The Cultural Resource Division, The Louis Berger Group, Inc. (Acquired by SWP Las Vegas 3753 HOWARD HUGHES PARKWAY, SUITE 135 NV 89169 LAS VEGAS UNITED STATES TEL: +1 (702) 697-8100

Description

The Nevada Department of Transportation (NDOT) and Parsons Engineering, in cooperation with the Federal Highway Administration (FHWA), are proposing to improve I-15 in Las Vegas, Clark County from US 95 to Edna Avenue. The proposed undertaking would include improvements to the I-15 corridor and major street connections beginning south of the I-15 and Sahara Avenue

Period of Significance

<1965

Findings

The historic architectural survey inventoried 1,261 properties and an additional 193 outbuildings. Of these 1,261 properties, 679 properties are of sufficient age to warrant further study and investigation. Of these 679 historic properties, only 185 properties (not including outbuildings) displayed sufficient integrity, age, and significance to be considered eligible for listing in either the State or National Register of Historic

Notes

At the time this study was conducted, the APE incorporated 370 parcels with build dates of 1965 or older. Many of these properties were very close to the 50 year cut off date. Since Project Neon was not expected to be completed until 2018 or later, NDOT and SHPO did not wish to reevaluate eligibility for all the Project Neon properties that were just on the cusp of turning 50 years old. Because of this the two agencies

5978_Project Neon A Historic Architectural Survey of 3.25 Miles .pdf

5978

March 17, 2008

PROJECT NEON:

A Historic Architectural Survey of 3.25 Miles (3,016.7 Acres) Along I-15 for Proposed Freeway Improvements Between US 95 and Edna Avenue, Las Vegas, Clark County, Nevada



Berger Cultural Resource Report No. 546 (P)

City of Las Vegas

Department of Planning

Long Range Planning Section

Figure 3: Historic Resource Catalog FileMaker Pro database

20

CITY OF LAS VEGAS HISTORIC RESOURCE CATALOG

HISTORIC RESOURCE CATALOG FIELDS

Field	Description
TITLE OF THE REPORT	Title of final report for each study
SURVEY/PROJECT YEAR	Year the survey or project research took place
PROJECT TYPE	Type of study/report, i.e., historic resource survey, national register nomination, section 106 review, etc.
PROJECT AREA	Boundary or location of each project
WARD #	Ward associated with the project area
DATE OF REPORT	Final date of report
PERIOD OF SIGNIFICANCE	Date(s) when a property was associated with historic events, activities, or person, or attained the characteristics that qualify it for National Register listing.
FINDINGS	The conclusion of the study or survey
DESCRIPTION OF PROJECT	Brief description of the project, including goals and objectives
COMMENTS/NOTES	Any notes regarding the project, including recommendations, comments on the findings, additional resource information, etc.
SHPO REPORT NO.	The associated report number assigned by SHPO
NRIS #	National Register Information System number assigned to national register nominations by the National Park Service.
LEAD AGENCY	The federal agency requesting/funding the study or survey
PROPONENT/CLIENT	The agency directly contracting the consultants
AUTHOR	The contracted consultants conducting the study and authoring the final report
AUTHOR CONTACT INFO	The consultant's contact information

Figure 4: Historic Resource Catalog fields and descriptions

PDF copies of all available, non-restricted reports were sourced and given to the City's Historic Preservation Officer. Page 26 details the reports that are missing and restricted.

Figure 5 on page 22 lists all the catalog records in the FileMaker Pro database with a reference to the project title, the project year, and the corresponding City ward. All individual catalog records are included in the following section, indexed by City ward, and chronologically arranged by survey year.

Please note, the recommended project updates noted in each record are based on the date of each study. Generally, any study over 10 years old will require an update to assess the historic integrity of the resources under review. A survey of all historic properties within City limits built prior to 1939 will be conducted in the fall of 2021. This updated survey will provide additional insight into the condition and historic integrity of early 20th century resources identified in many of the studies in the literature review. The findings of the survey are expected in February 2022.

Figure 5 (pg 22): Historic Resource Catalog list organized chronologically and by alphabetical order.

HISTORIC RESOURCE CATALOG

TITLE	WARD #	PROJECT YEAR
MISSING Frank Wait House City of Las Vegas Historic Register Nomination	5	unknown
MISSING Henderson House City of Las Vegas Historic Register Nomination	3	unknown
MISSING Mesquite Club City of Las Vegas Historic Register Nomination	3	unknown
Guide to the Historic Building Survey Photograph Collection	1,2,3,4,5,6,paradise	1970-1982
UNLV Historic Building Survey Collection 1930 - 2001	1,2,3,4,5,6,paradise	1970-1990
Las Vegas Mormon Fort National Register of Historic Places Nomination	5	1971
MISSING The General Plan for the City of Las Vegas		1975
Church of Jesus Christ of Latter Day Saints Historic Building Survey Project	3	1976
El Portal Theater Historic Building Survey	5	1976
Floyd Lamb Park Structural Survey I, II	6	1977
Floyd Lamb State Park National Register of Historic Places Nomination	6	1977
Archaeological Element Historic Preservation Assessment and Planning Process	1,3,5	1977-1978
Historic Preservation Inventory & Planning Guidelines for the City of Las Vegas	1,3,5	1977-1978
Las Vegas Mormon Fort NRHP Boundary Increase	5	1978
RESTRICTED Las Vegas Springs (Springs Preserve) National Register of Historic Places Nomination	1	1978
One Hundred and Twenty-Five Years at Las Vegas' Old Fort: A Historic Structures Report of Las Vegas Fort and Ranch	5	1978
United States Post Office and Courthouse National Register of Historic Places Nomination	5	1978
Westside School National Register of Historic Places Nomination	5	1978
RESTRICTED Tule Springs Archeological Site National Register of Historic Places Nomination	6	1979
Cultural Resource Overview of the Las Vegas Valley	1,3,5	1983
Historic Resources of Central Las Vegas, Vol I, II, III	3,5	1984
Las Vegas High School Academic Building and Gymnasium National Register of Historic Places Nomination	3	1984
Fifth Street School National Register of Historic Places Nomination	3	1986
Jay Dayton Smith House National Register of Historic Places Nomination	3	1986
Neon in Nevada: A Survey of Contemporary and Historic Neon Signs in Nevada, Vol I and II	3,5,paradise	1986
Thematic Nomination of Properties Associated with the San Pedro, Los Angeles, and Salt Lake Railroad National Register of Historic Places Nomination	3,5	1986
Las Vegas High School Neighborhood Historic Resources Survey Volume I,II	3	1988
Wildcat Country: Las Vegas High School and its Neighborhood 1930-1945	3	1988
West Las Vegas Development Analysis and Strategy	5	1989
Las Vegas High School Neighborhood Historic District National Register of Historic Places Nomination	3	1990
Equestrian Facilities Master Plan, Floyd Lamb Park	4,5,6	1991
MISSING Determination of Eligibility for Two Buildings at the Coca Cola Bottling Company of Las Vegas	5	1991 - 1992
Architectural Recording of Shop Building E, Las Vegas District Compound, Department of Transportation, Las Vegas, Nevada (Agreement No.: P277-89-013, E.A.: 71629)	5	1992
Floyd Lamb Park Building Survey	6	1992
Moulin Rouge Hotel National Register of Historic Places Nomination	5	1992
A Cultural Resource Investigation of Improvements at Floyd R. Lamb State Park	6	1993
Green Shack National Register of Historic Places Nomination	3	1993

TITLE	WARD #	PROJECT YEAR
Huntridge Theater National Register of Historic Places Nomination	3	1993
West Las Vegas Plan	5	1994
RESTRICTED Eureka Locomotive National Register of Historic Places		1995
"The Next Close Area", A Reconnaissance Level Survey to Inventory Historic Buildings Around Eighth and Ogden Streets, City of Las Vegas, Campaign Place Development Project	5	1997
A Historical Architectural Survey and National Register of Historic Places Eligibility Recommendations for Structures Present Along a One-Mile Corridor between Sahara Boulevard and Charleston Boulevard for the Interstate 15 Study, Las Vegas, Clark County	3	1998
Binion's Casino Historic Resource Inventory Form	5	2001
Cultural and Historical Resources Technical Report, Elkhorn Road Overpass Project, City of Las Vegas, Nevada	6	2001
Historic Resources Inventory Form: 200 S. Ninth Street, Las Vegas, NV 89101 - SDASHS City Center Apartment Project	3	2001
Historic Resources Inventory Form: 221 S. Eighth Street, Las Vegas, NV 89101 - SDASHS City Center Apartment Project	3	2001
John S. Park Historic District National Register of Historic Places registration form	3	2001
MISSING L'Octaine Housing and Retail Development Project (No report; resource forms only)	3	2001
Old Spanish Trail/Mormon Road Historic District National Register of Historic Places Nomination	1,2,3,5	2001
The Cottages: A Property Survey	3	2001
A Class III Archaeological Survey and Architectural Assessment of 32.12 Acres for the Tropical Overpass Located at US 95, Las Vegas, Clark County, Nevada (Cultural Resource Division Clearance Report No. 359 (N)) Photo log and photo documentation	6	2002
A Class III Archaeological Survey and Architectural Assessment of 32.12 Acres for the Tropical Overpass Located at US 95, Las Vegas, Clark County, Nevada Formal study report	6	2002
Beverly Green/Southridge Neighborhood Plan	3	2002
Downtown Las Vegas: Historic Resource Survey and Inventory	3, 5	2002
Historic Resource Survey Report - North Ninth Street Elementary School, Las Vegas, Nevada	5	2002
The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County, Nevada - Binder 1-4	3, 5, paradise	2002
The Historic Properties Survey Fixed Guideway Project Area of Effect, Las Vegas, Clark County, Nevada - Photographs (3 Binders)	3,5	2002
Biltmore Homes Historic Resource Survey and Inventory, City of Las Vegas - Volume I, II	5	2002-2003
An Architectural Assessment of 93 Linear Miles of Alley and Roadway Shoulder Improvements, Las Vegas, Clark County, Nevada - Volume 2 - (Cultural Resource Division Clearance Report No. 454b (N))	1,2,3,4,5,6, paradise	2003
Clark Avenue Railroad Underpass/Bonanza Road Underpass National Register of Historic Places Nomination	5	2003
Fremont Street Entertainment District: Windshield Survey for Historic Resources	3,5	2003
Las Vegas Administration Site Disposal Project	5	2003
Las Vegas Main Street Historic District National Register of Historic Places Nomination Submission	3	2003
West Las Vegas Historic Resource Survey and Inventory, City of Las Vegas, September, 2003	5	2003

TITLE	WARD #	PROJECT YEAR
Las Vegas Blvd. Scenic Byway Corridor Management Plan	3,5	2004
An Historic Architectural Survey of 20 Miles (2,763.5 Acres) Along I-515 for the Proposed Freeway Improvements Between I-15 and Foothills Drive, Vol I	3, 5, Paradise, Henderson	2005
Berkley Square Historic Resource Inventory and Survey	5	2005
Historic Properties Survey, I-15 Corridor Improvement, U.S. 95 to Apex	3,5, North Las Vegas	2005
Huntridge Tracts 1 and 2 Historic Resource Survey and Inventory	3	2005
Wedding Chapels of Downtown Las Vegas Blvd: Historic Resource Survey and Inventory	3	2005
Fremont Street Pedestrian Improvements, Las Vegas: Cultural Resources Inventory and Evaluation Report	3,5	2006
Woodlawn Cemetery National Register of Historic Places Nomination	5	2006
Berkley Square Historic District National Register of Historic Places Nomination	5	2007
MISSING Cultural Resources Study of the Chapman Drive and Thelma Lane Project, T-Mobile Site Number TM-VG-08659-A, 1501 East Charleston Boulevard, Las Vegas, Clark County, Nevada 89101		2007
Floyd Lamb Park Master Plan	6	2007
Historic Properties Inventory, Central City Intermodal Transportation Terminal, Las Vegas, Clark County, Nevada	3	2007
Historical Architectural Survey Report: US 95 Northwest, Washington Avenue to Kyle Canyon Road, Clark County, Nevada	1,4,5,6	2007
National Register of Historic Places Evaluation of Ryland Taylor Hall Armed Forces Reserve Center	3	2007
Project Neon: A Historic Architectural Survey of 3.25 Miles (3,016.7 Acres) Along I-15 for Proposed Freeway Improvements Between US 95 and Edna Avenue, Las Vegas, Clark County, Nevada	1,3,5	2007
Section 106 Stupak Community Center Historic Resources Survey Report	3	2007
1-15 "Project Neon" from Sirius Ave to W. Bonanza Road	1,3,5	2008
Floyd Lamb Park at Tule Springs Historic Survey	6	2008
Neon Boneyard Historic Resources Survey and Inventory Report, Las Vegas, Nevada, Phases I & II	5	2008
Section 106 H & Monroe Senior Apartments Phase II & III, Historic Resources Survey Report	5	2008
Section 106 McKnight Senior Village Phase II & III Historic Resources Survey Report	3	2008
The Alta Vista, Acres, Oakridge Tracts: A Survey and Inventory in Las Vegas, Clark County, Nevada	3	2009
Westleigh Neighborhood Historic Resource Survey	1	2009
An Architectural Survey and Inventory for the U.S. Vets at the Meadows Housing Project, Las Vegas, Clark County, Nevada	3,5	2010
Lorenzi Park National Register of Historic Places Nomination	5	2010
The Huntridge and Southridge Tracts: Phase II Survey and Inventory of the Southridge Neighborhood, Las Vegas, Clark County, Nevada	3	2010
Determination of Eligibility and Finding of Effect Report for Neon Museum Visitor Center, Las Vegas, Nevada	5	2011
Historic Westside School and Variety Early Learning Center Master Plan	5	2011
Intensive Level Historic Resource Survey and Inventory of the Phase II Beverly Green Neighborhood: The Meadows Addition, South Fifth Tract, South Fifth Tract No. 1, and Paradise Village Tracts Nos. 1, 2, 3, and 4, Las Vegas, Clark County, Nevada	3	2011
The South Fifth Street, El Centro, and Beverly Green Tracts, Phase I Beverly Green Neighborhood Survey and Inventory. Las Vegas, Clark County, Nevada.	3	2011
El Cortez Hotel and Casino National Register of Historic Places Nomination	3	2012

TITLE	WARD #	PROJECT YEAR
Intensive Level Historic Resource Survey and Inventory of the Phase III Beverly Green Neighborhood: The Paradise Park Tract, Paradise Plaza Tract No. 1, and the Van Patten Tracts No. 1 and 2, Las Vegas, Clark County, Nevada	3	2012
Morelli House National Register of Historic Places Nomination	3	2012
Historic Building Condition Assessment Report and Preservation Plan for the Victory Hotel	3	2013
Harrison's Guest House National Register of Historic Places Nomination	5	2014
Phase II Huntridge Neighborhood Historic Resource Survey and Inventory	3	2014
La Concha Motel Lobby State Register of Historic Places Nomination	5	2015
Resource-Specific Architectural Inventory for the Carpenters Union Hall (B14082), Clark County	3	2015
World War II Era Residential Housing in Las Vegas, Clark County, Nevada (1940-1945)	3,5	2015
National Register of Historic Places Eligibility Assessment of the WWII Era Huntridge Neighborhood, Las Vegas, Clark County, Nevada	3	2016
Reed Whipple Cultural Center National Register of Historic Places Nomination	5	2016
Wengert House City of Las Vegas Historic Register Nomination	3	2016
Las Vegas High School Historical Assessment & Feasibility Study	3	2017
Luxury Living at Moderate Rentals: Historic and Architectural Contexts for the Meadows Village Area, Las Vegas, Clark County	3	2017
Helen Toland Residence City of Las Vegas Historic Register Nomination	5	2018
Las Vegas High School Academic Building and Gymnasium (Boundary and Significance Increase, Additional Information, and Name Change to Las Vegas High School Academic Building, Gymnasium, and Frazier Hall)	3	2019
Historic Context Report for the Historic Westside Neighborhood	5	2019-2020
Intensive Level Architectural Survey of Motor Court Motels along Las Vegas Boulevard and Fremont Street	3, 5	2019-2020
The African American Civil Rights Experience in Nevada, 1900 - 1979	5	2019-2020
Brief History of Redevelopment Efforts in the Historic Westside Neighborhood	5	2020
IN PROGRESS Biltmore Bungalows Updated Historic Resource Survey	5	2020-2021
IN PROGRESS Las Vegas High School NRHP (District Nomination)	3	2021

MISSING AND RESTRICTED REPORTS

TITLE	Status	WARD #	PROJECT YEAR
Frank Wait House City of Las Vegas Historic Register Nomination	MISSING	5	
Henderson House City of Las Vegas Historic Register Nomination	MISSING	3	
Mesquite Club City of Las Vegas Historic Register Nomination	MISSING	3	
The General Plan for the City of Las Vegas	MISSING		1975
Las Vegas Springs (Springs Preserve) National Register of Historic Places Nomination	RESTRICTED	1	1978
Tule Springs Archeological Site National Register of Historic Places Nomination	RESTRICTED	6	1979
Determination of Eligibility for Two Buildings at the Coca Cola Bottling Company of Las Vegas	MISSING	5	1992
Eureka Locomotive National Register of Historic Places	RESTRICTED		1995
L'Octaine Housing and Retail Development Project (No report; resource forms only)	MISSING	3	2001
The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County, Nevada - Binder 2 of 4	MISSING	3,5,paradise	2002
The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County, Nevada - Binder 3 of 4	MISSING	3,5,paradise	2002
Cultural Resources Study of the Chapman Drive and Thelma Lane Project, T-Mobile Site Number TM-VG-08659-A, 1501 East Charleston Boulevard, Las Vegas, Clark County, Nevada 89101	MISSING		2007

In total, 9 reports are currently missing and 3 are restricted and only available to the City of Las Vegas Historic Preservation Officer. A scan request has been submitted to the NV SHPO for the following reports:

- Determination of Eligibility for Two Buildings at the Coca Cola Bottling Company of Las Vegas
- L'Octaine Housing and Retail Development Project
- The Historic Properties Survey Fixed Guideway Project Area of Effect, Binder 2 and 3
- Cultural Resources Study of the Chapman Drive and Thelma Lane Project

Note: Binder 2 and 3 of The Historic Properties Survey Fixed Guideway Project Area of Effect include images and HRIF forms of the project. The complete report is available in Binder 1, which has been sourced and scanned.


Figure 6: City of Las Vegas Ward Map

City of Las Vegas

Council Wards

Mayor Carolyn G. Goodman

- Ward 1
- Ward 2
- Ward 3
- Ward 4
- Ward 5
- Ward 6

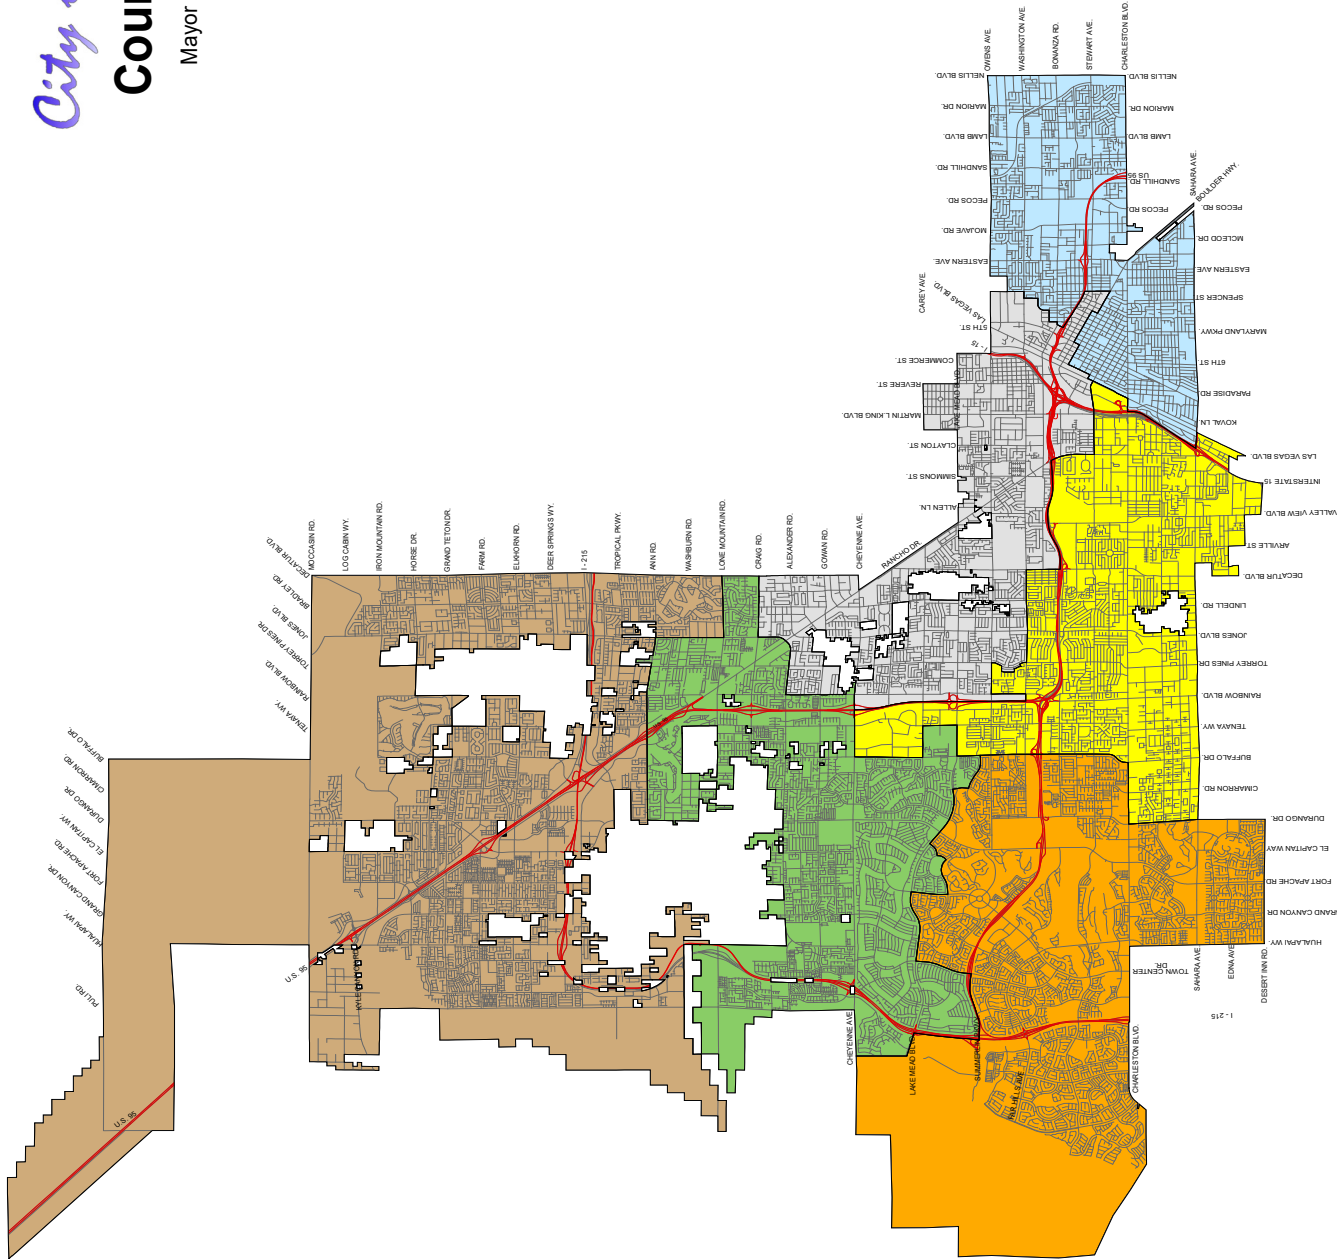

SOURCE: City of Las Vegas, Planning and Development Department
 GIS created from street data
 and ward boundaries provided by the City
 of Las Vegas. The map is for informational purposes only.
 Geographic Information System
 Planning & Development
 Printed: December 10, 2012




Ward 1

The following projects are located within ward 1 of the City of Las Vegas. The map illustrates the boundary of ward 1 in pink and the location of each project highlighted in blue. The map number correlates to the numbers listed in the table below. The individual historic resource records are listed chronologically and alphabetically, and contain a map of each location for better geographic reference.

Ward 1 Projects

Map #	TITLE	PROJECT AREA	WARD #	PROJECT YEAR
1	RESTRICTED Las Vegas Springs (Springs Preserve) National Register of Historic Places Nomination		1	1978
2	Westleigh Neighborhood Historic Resource Survey	Westleigh Tracts 1-5	1	2009

Ward 1 Historic Resource Catalog

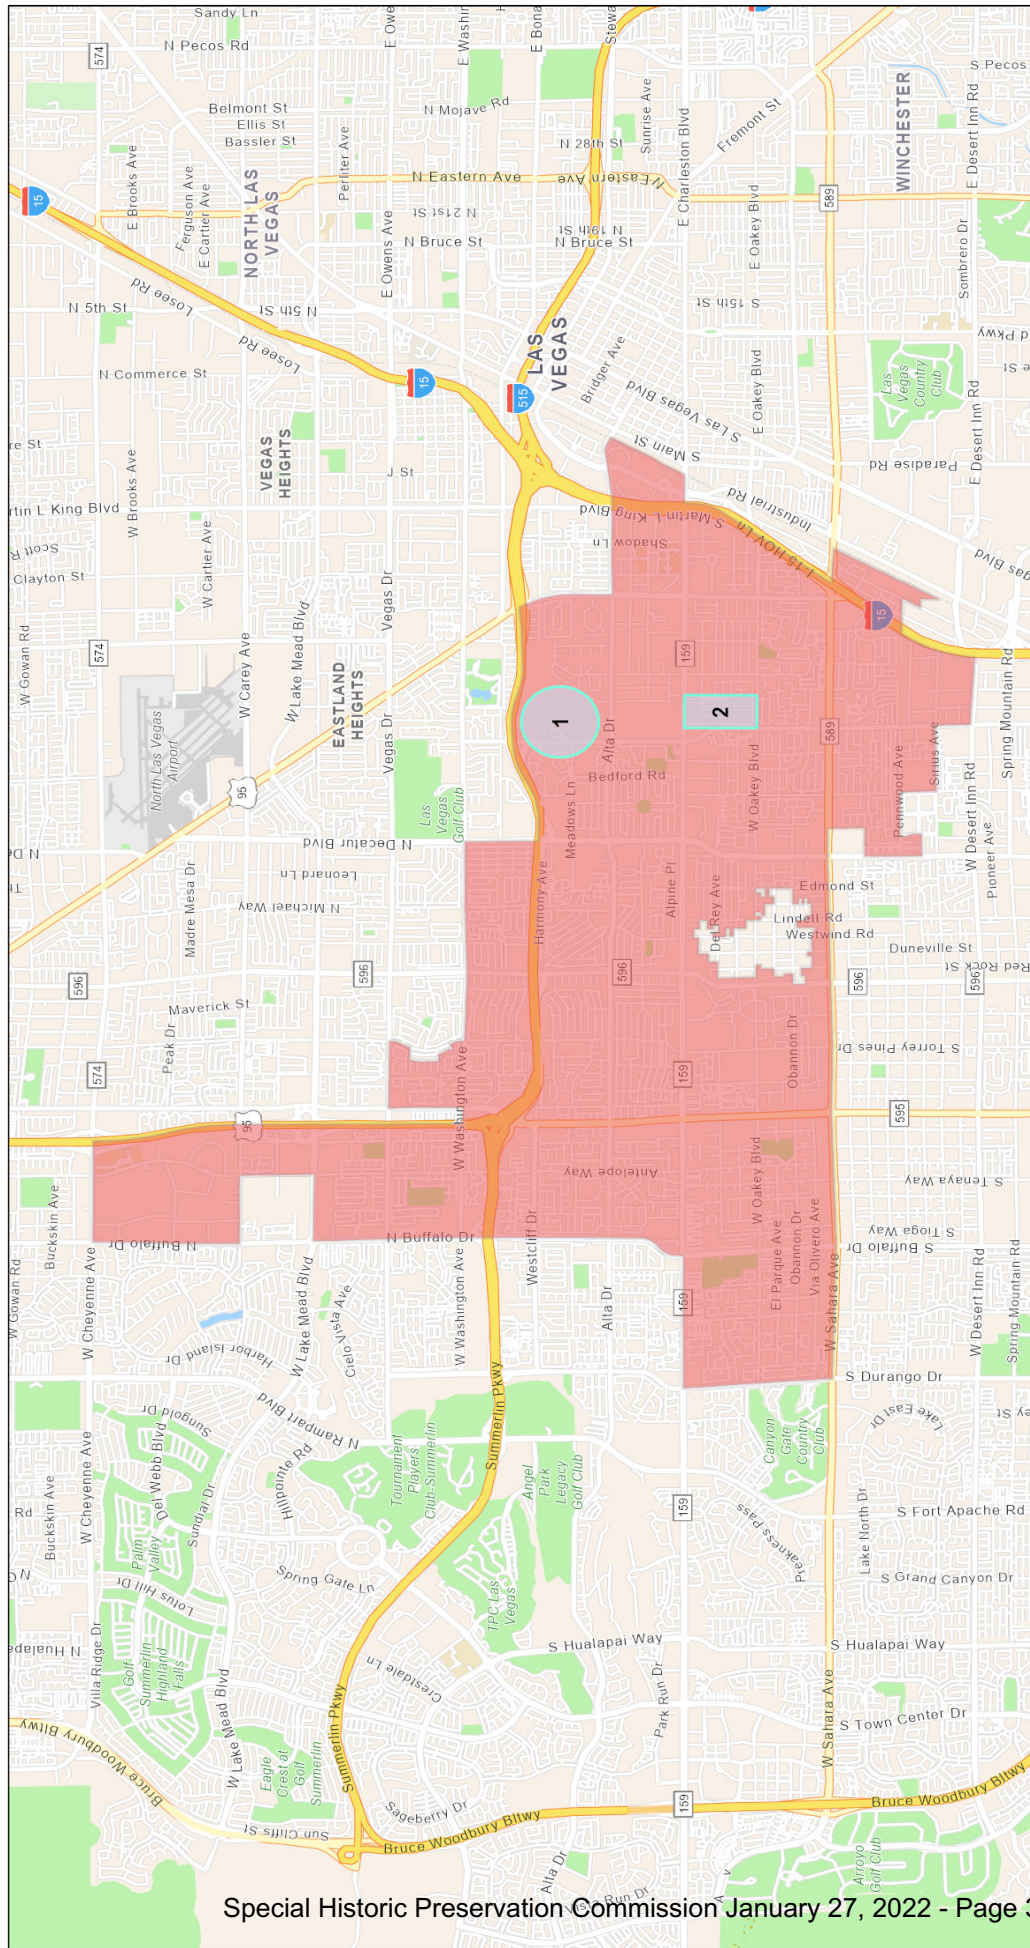


8/14/2021

City of Las Vegas Wards

1

1:72,224



Clark County Dept of Aviation, Esri, HERE, Garmin, SafeGraph, METN/ASA, USGS, Bureau of Land Management, EPA, NPS, USDA

Nevada Preservation Foundation
City of Las Vegas

Figure 7: City of Las Vegas Ward 1 Map

City of Las Vegas Historic Resource Reports

Title: Las Vegas Springs (Springs Preserve) National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 1

Date: **Project Year:**

Project Area:

Period of Significance: Prehistoric, 1800-1899, 1900

Description:
National Register of Historic Places Nomination

Findings:
historic significance - Archeology: Prehistoric; Agriculture; Exploration; Spanish Trail: Water Source for Mormon Occupation

Notes:
Restricted. Only accessible on the City of Las Vegas, Historic Preservation Officer’s account and are not to be shared.

SHPO Report #:
NRIS #: 78001719


Federal Agency: n/a

Client:

Author:

Author Contact:

Map Notes:

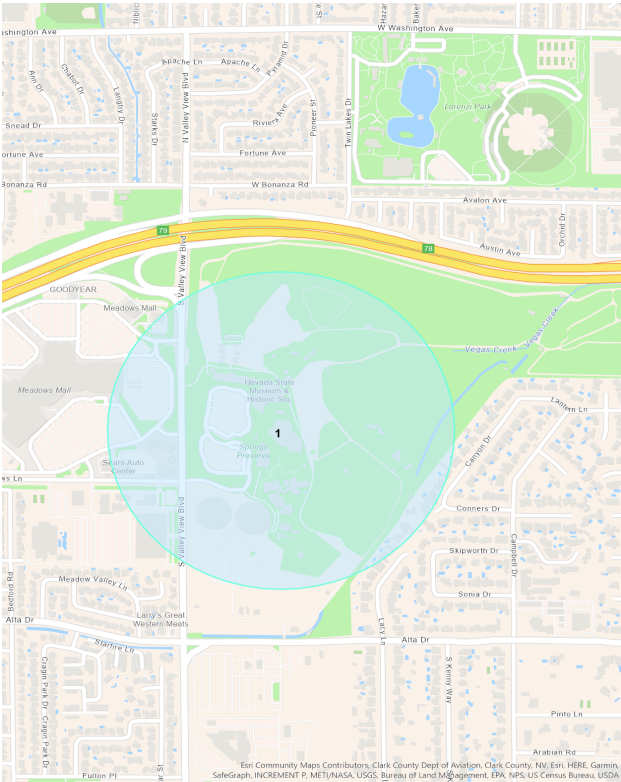

City of Las Vegas Historic Resource Reports

Title: Westleigh Neighborhood Historic Resource Survey

Type: Historic Resource Survey **Ward:** 1

Date: 2/1/2009 **Project Year:** 2009

Project Area: Westleigh Tracts 1-5

Period of Significance: 1951-1967

Description:

The purpose of this historic survey for the Westleigh neighborhood is to determine whether the neighborhood qualifies for listing as a local historic district. This survey report provides the historic context for the neighborhood and identifies its historic and architectural significance. It also provides the registration criteria that were used to determine whether and how the buildings in the subdivision were considered contributing or noncontributing to a potential Historic District. It also makes suggestions on topics to be considered in drafting future design guidelines for the area.

Findings:

The Westleigh neighborhood is made up of Westleigh Tracts One through Five, and comprises 288 properties whose construction dates range from 1951 to 1967, although most of the houses were constructed in 1953 or 1954. All parcels are developed and, remarkably, there appears to be no properties that have been completely redeveloped. Most properties have been altered to some degree, however, and some (mostly commercial properties) have been altered inappropriately with respect to the historic character of the neighborhood. This report finds that 161 properties in Westleigh are contributing to the potential Historic District, and 127 are not. That is, fifty- six percent (56%) of the properties retain sufficient integrity to contribute to a district.

Attached to this report, in Appendix A, is the list of parcels in the subdivision with their recommended status as contributory or noncontributory to a potential Historic District.

Notes:

Survey is over 10 years old; a survey update is recommended.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: Painter, Diana

Author Contact: Sonoma Office:
388 Patten Street
Sonoma, CA 95476
E-mail: diana@preservationplans.com
Telephone: (707) 763-6500


Map Notes:

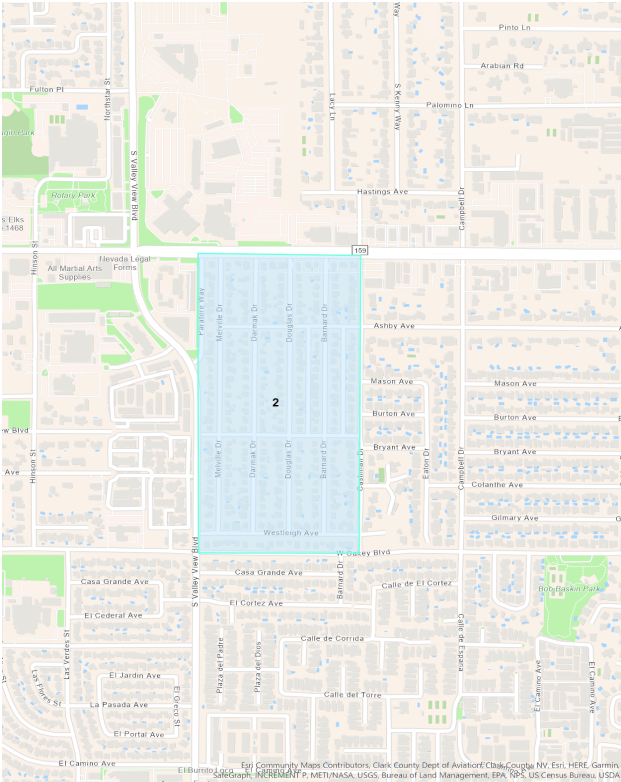

Ward 2

There are no projects/studies located individually in Ward 2. Refer to the section titled “Multiple Wards” on page 171 to review catalog records that have spanning project locations across multiple wards, including Ward 2.

Ward 2 Historic Resource Catalog

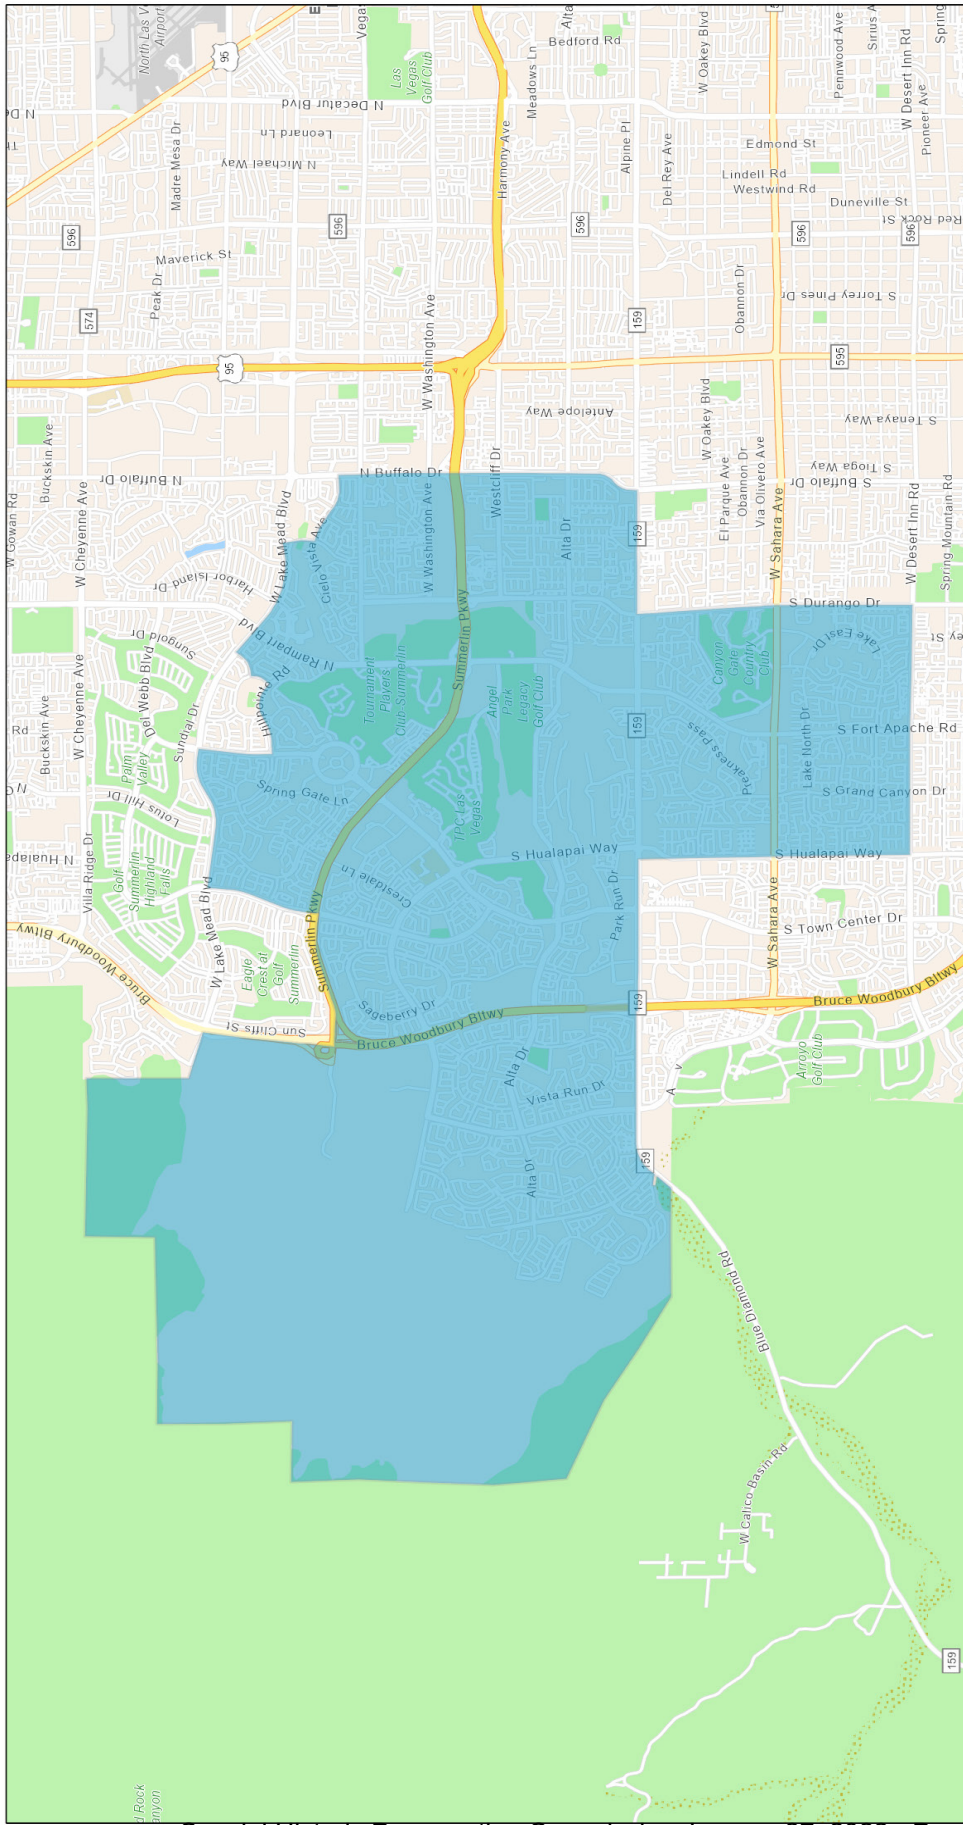

38/14/2021

City of Las Vegas Wards

2

1:72,224

0 0.5 1 2

2 mi

0 1 2 4 km

Clark County Dept of Aviation, Esri, HERE, Garmin, SafeGraph, METUSASA, USGS, Bureau of Land Management, EPA, NPS, USDA


Nevada Preservation Foundation
City of Las Vegas

Figure 8: City of Las Vegas Ward 2 Map

Ward 3

The following projects are located within ward 3 of the City of Las Vegas. The map illustrates the boundary of ward 3 in black and the location of each project highlighted in blue. The map number correlates to the numbers listed in the Ward 3 Project table. The individual historic resource records are listed chronologically and alphabetically, and contain a map of each location for better geographic reference.

Ward 3 Historic Resource Catalog

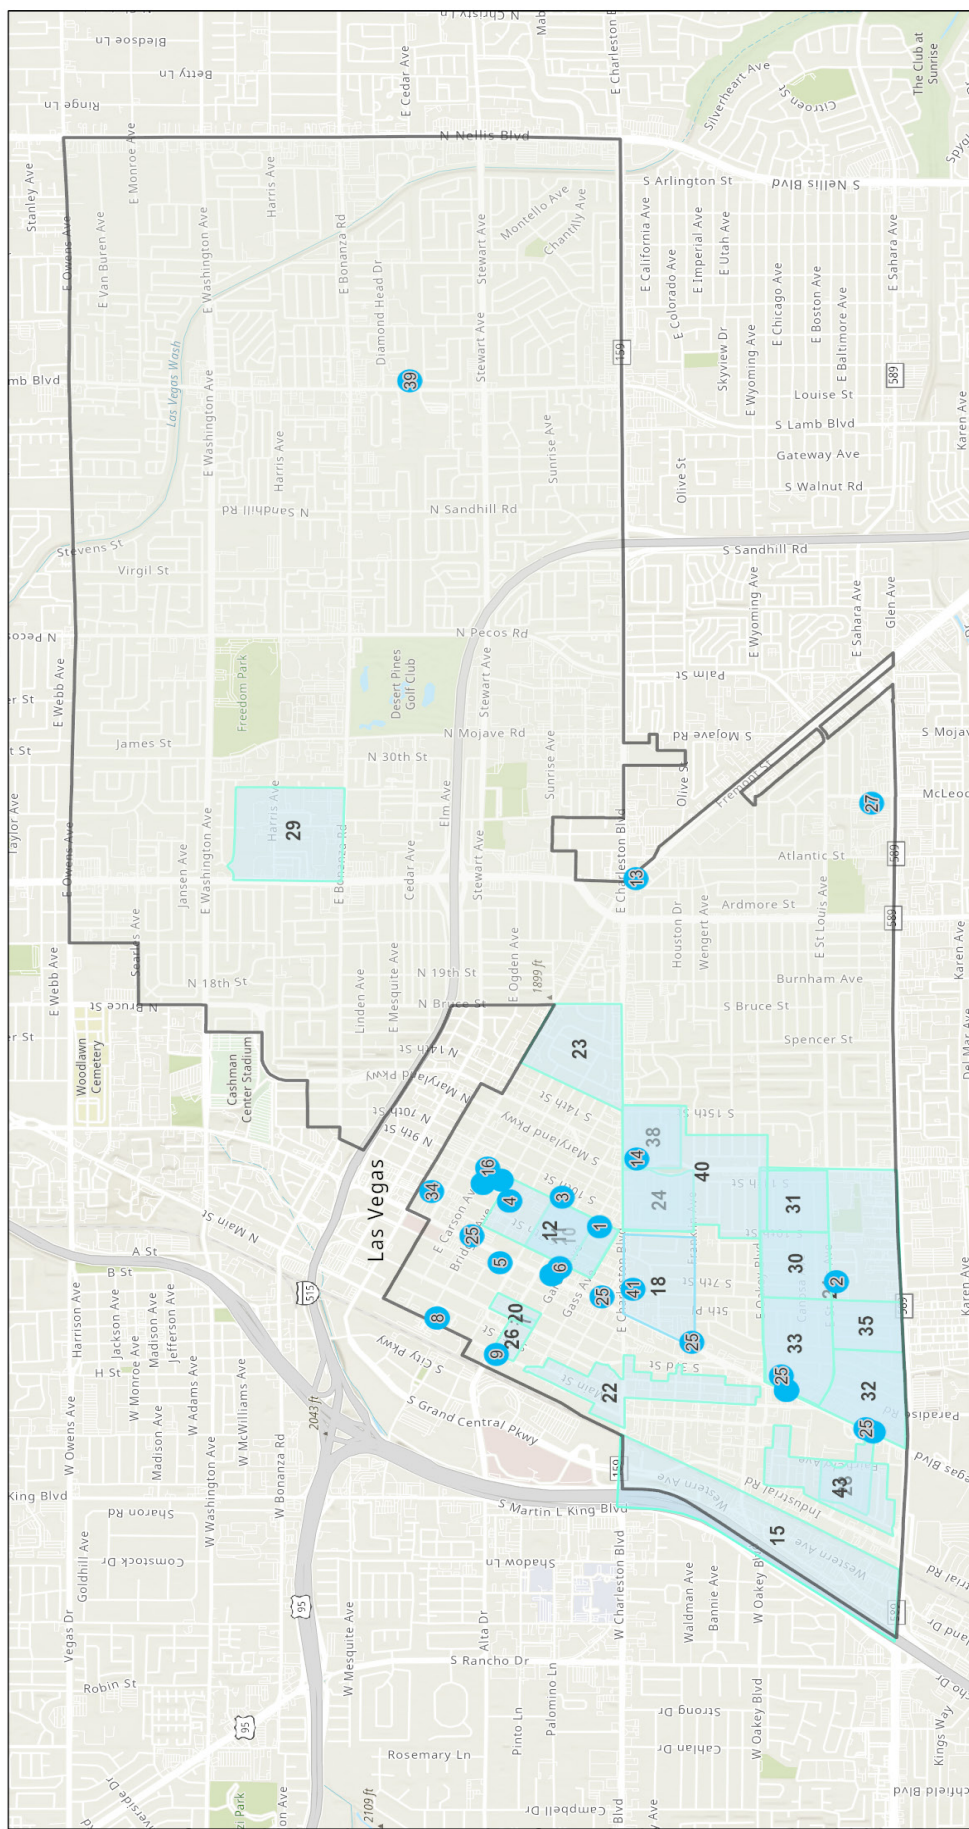

09/17/2021

● Individual Properties

City of Las Vegas Wards

3

1:36,112

0 0.35 0.7 1 1.4 mi

0 0.5 1 2 km

Esri, NASA, IGA, USGS, FEMA, Clark County Dept of Aviation, Esri, HERE, Garmin, Sategraph, INCREMENT P, META/ASA, USGS, Bureau of Land Management, EPA, NPS, US Census Bureau, USDA

Nevada Preservation Foundation
City of Las Vegas

Figure 9: City of Las Vegas Ward 3 Map

Wards 3 Projects

Map #	TITLE	PROJECT AREA	WARD #	PROJECT YEAR
1	MISSING Henderson House City of Las Vegas Historic Register Nomination	704 S. 9th St. Las Vegas, NV 89101	3	unknown
2	MISSING Mesquite Club City of Las Vegas Historic Register Nomination	702 E. St. Louis Ave. Las Vegas, NV 89101	3	unknown
3	Church of Jesus Christ of Latter Day Saints Historic Building Survey Project	501 S. 9th St. Las Vegas, NV 89101	3	1976
4	Las Vegas High School Academic Building and Gymnasium National Register of Historic Places Nomination	315 S 7th St, Las Vegas, NV 89101	3	1984
5	Fifth Street School National Register of Historic Places Nomination	400 South Las Vegas Blvd. Las Vegas, NV 89101	3	1986
6	Jay Dayton Smith House National Register of Historic Places Nomination	624 S. Sixth St. Las Vegas, NV 89101	3	1986
7 through 9	FOR NUMERICAL CONTINUITY ONLY			
10	Las Vegas High School Neighborhood Historic Resources Survey - Volumes I & II	The area which was surveyed extends roughly from Sixth St. to Ninth St., and Gas Ave to Clark Ave.	3	1988
11	Wildcat Country: Las Vegas High School and its Neighborhood 1930-1945	The area roughly bounded by 6th St., Garces Ave, 9th St., and Clark Ave.	3	1988
12	Las Vegas High School Neighborhood Historic District National Register of Historic Places Nomination	District roughly bounded by E. Bridger St; S. 9th St; E. Gass St; S. 6th St.	3	1990
13	Green Shack National Register of Historic Places Nomination	2504 East Fremont St. Las Vegas, NV 89104	3	1993
14	Huntridge Theater National Register of Historic Places Nomination	1208 E. Charleston Blvd. Las Vegas, NV 89104	3	1993
15	A Historical Architectural Survey and National Register of Historic Places Eligibility Recommendations for Structures Present Along a One-Mile Corridor between Sahara Boulevard and Charleston Boulevard for the Interstate 15 Study, Las Vegas, Clark County	APE is bounded by I-15, Union Pacific Railroad tracks, Sahara Ave and Charleston Blvd.	3	1998
16	Historic Resources Inventory Form: 200 S. Ninth Street, Las Vegas, NV 89101 - SDASHS City Center Apartment Project	200 S. 9th Street, Las Vegas, NV 89101	3	2001
17	Historic Resources Inventory Form: 221 S. Eighth Street, Las Vegas, NV 89101 - SDASHS City Center Apartment Project	221 S. 8th Street, Las Vegas, NV 89101	3	2001
18	John S. Park Historic District National Register of Historic Places registration form	Historic District boundaries: Las Vegas Boulevard and South Ninth Street to the west and east, and Charleston Boulevard and Franklin Avenue to the north and south, respectively.	3	2001
19	MISSING L'Octaine Housing and Retail Development Project (No report; resource forms only)		3	2001
20	The Cottages: A Property Survey	The survey area is bounded by Garces Ave, Casino Center Blvd, Clark Ave, and Third St.	3	2001
21	Beverly Green/Southridge Neighborhood Plan	Neighborhood bounded by Las Vegas Blvd, Oakey Ave, Maryland Pkwy, and Sahara Ave.	3	2002
22	Las Vegas Main Street Historic District National Register of Historic Places Nomination Submission	Roughly 800-1400 blocks of Commerce, Main, First, Casino Center and cross streets in Downtown Las Vegas	3	2003
23	Mayfair Homes Historic Resources Survey and Inventory, City of Las Vegas	The boundaries for the survey are Fremont Street and Charleston Boulevard on the north and south, and S. Fifteenth Street and Bruce Street on the west and east, respectively.	3	2003
24	Huntridge Tracts 1 and 2 Historic Resource Survey and Inventory	The survey area includes the following: S. 10th Street from Charleston Boulevard to Franklin Avenue; Yucca Avenue from S. 10th Street to Francis Avenue; Francis Avenue from S. 10th Street to Maryland Parkway; Jessica Avenue from S. 10th Street to Maryland Parkway; Norman Avenue from S. 10th Street to Maryland Parkway; and the north side of Franklin Avenue between S. 10th Street and Maryland Parkway.	3	2005
25	Wedding Chapels of Downtown Las Vegas Blvd: Historic Resource Survey and Inventory	231 S Las Vegas Blvd. Las Vegas, NV 89101 619 S Las Vegas Blvd. Las Vegas, NV 89101 827 S Las Vegas Blvd. Las Vegas, NV 89101 1301 S Las Vegas Blvd. Las Vegas, NV 89101 1717 S Las Vegas Blvd. Las Vegas, NV 89101 1735 S Las Vegas Blvd. Las Vegas, NV 89101 1737 Las Vegas Blvd. Las Vegas, NV 89101 2211 S Las Vegas Blvd. Las Vegas, NV 89101 2233 S Las Vegas Blvd. Las Vegas, NV 89101	3	2005

Map #	TITLE	PROJECT AREA	WARD #	PROJECT YEAR
26	Historic Properties Inventory, Central City Intermodal Transportation Terminal, Las Vegas, Clark County, Nevada	Downtown Las Vegas, between Bonneville Ave. and Garces Ave, north and south, and Main St./Commerce and Casino Center, west and east	3	2007
27	National Register of Historic Places Evaluation of Ryland Taylor Hall Armed Forces Reserve Center	2901 E Sahara Ave, Las Vegas, NV 89104	3	2007
28	Section 106 Stupak Community Center Historic Resources Survey Report	APE is bounded by St. Louis Ave, Fairfield Ave, Tam Drive, and Cleveland Ave and consists of approximately 1.24 acres.	3	2007
29	Section 106 McKnight Senior Village Phase II & III Historic Resources Survey Report	APE is bounded by Eastern and Wardelle St, west and east, and Willoughby Ave and Bonanza Ave, north and south.	3	2008
30	The Alta Vista, Acres, Oakridge Tracts: A Survey and Inventory in Las Vegas, Clark County, Nevada	The 44.4-acre survey area contains 176 parcels in an area bounded by East St. Louis Avenue to the south, South 6th Street to the west, East Oakey Boulevard to the north, and South 10th Street to the east.	3	2009
31	The Huntridge and Southridge Tracts: Phase II Survey and Inventory of the Southridge Neighborhood, Las Vegas, Clark County, Nevada	The 42.5-acre Phase II survey contains 192 parcels in an area bounded by East St. Louis Avenue to the south, South 10th Street on the west, South Maryland Parkway on the east, and East Oakey Boulevard to the north.	3	2010
32	Intensive Level Historic Resource Survey and Inventory of the Phase II Beverly Green Neighborhood: The Meadows Addition, South Fifth Tract, South Fifth Tract No. 1, and Paradise Village Tracts Nos. 1, 2, 3, and 4, Las Vegas, Clark County, Nevada	The survey area is bounded by East Saint Louis Avenue to the north, East Sahara Avenue to the south, South Las Vegas Boulevard to the west, and Santa Rosa Drive to the east.	3	2011
33	The South Fifth Street, El Centro, and Beverly Green Tracts, Phase I Beverly Green Neighborhood Survey and Inventory. Las Vegas, Clark County, Nevada.	The project area is bounded by East St. Louis Avenue to the south, South Sixth Street on the east, South Las Vegas Boulevard on the west, and East Oakey Boulevard to the north.	3	2011
34	El Cortez Hotel and Casino National Register of Historic Places Nomination	600 Fremont St. Las Vegas, NV 89101	3	2012
35	Intensive Level Historic Resource Survey and Inventory of the Phase III Beverly Green Neighborhood: The Paradise Park Tract, Paradise Plaza Tract No. 1, and the Van Patten Tracts No. 1 and 2, Las Vegas, Clark County, Nevada	The survey area is bounded by East Saint Louis Avenue to the north, East Sahara Avenue to the south, Santa Rosa Drive to the west, and South Sixth Street to the east.	3	2012
36	Morelli House National Register of Historic Places Nomination	861 East Bridger Ave. Las Vegas, NV 89101	3	2012
37	Historic Building Condition Assessment Report and Preservation Plan for the Victory Hotel	307 S. Main St, Las Vegas, NV	3	2013
38	Phase II Huntridge Neighborhood Historic Resource Survey and Inventory	The survey area is known as Huntridge Subdivision - Tract 3 in the City of Las Vegas, Nevada. The area is generally bounded by Francis Avenue and Cottonwood Place on the north, Maryland Parkway on the west, Norman Avenue on the south, and South Fifteenth Street on the east. It also includes Huntridge Circle Park.	3	2014
39	Resource-Specific Architectural Inventory for the Carpenters Union Hall (B14082), Clark County	500 N. Lamb Blvd. Las Vegas, NV 89110	3	2015
40	National Register of Historic Places Eligibility Assessment of the WWII Era Huntridge Neighborhood, Las Vegas, Clark County, Nevada	The Huntridge Neighborhood, bounded by East Charleston Boulevard to the north, East Oakey Boulevard to the south, South 10th Street to the west, and South 15th Street to the east.	3	2016
41	Wengert House City of Las Vegas Historic Register Nomination	600 E. Charleston Blvd. Las Vegas, NV 89106	3	2016
4	Las Vegas High School Historical Assessment & Feasibility Study	315 S 7th St. Las Vegas, NV 89101.	3	2017
43	Luxury Living at Moderate Rentals: Historic and Architectural Contexts for the Meadows Village Area, Las Vegas, Clark County	The study area's boundaries are roughly defined as New York Avenue to the north, Fairfield Avenue and Commerce Street to the east, Cincinnati Avenue to the south, and Tam Drive and Industrial Road to the west.	3	2017
4	Las Vegas High School Academic Building and Gymnasium (Boundary and Significance Increase, Additional Information, and Name Change to Las Vegas High School Academic Building, Gymnasium, and Frazier Hall)	315 S 7th St, Las Vegas, NV 89101	3	2019
4	IN PROGRESS Las Vegas High School NRHP District Nomination	315 S 7th St, Las Vegas, NV 89101	3	2021

Map #	TITLE	PROJECT AREA	WARD #	PROJECT YEAR
#	SAME LOCATION			

City of Las Vegas Historic Resource Reports

Title: Henderson House City of Las Vegas Historic Register Nomination

Type: Local Register Nomination **Ward:** 3

Date: **Project Year:**

Project Area: 704 S. 9th St.
Las Vegas, NV 89101

Period of Significance:

Description:
Application for City of Las Vegas Historic Designation

Findings:

Notes:
Application not available. Refer to the City of Las Vegas Historic Preservation Officer for more information

SHPO Report #:

NRIS #:


Federal Agency:

Client:

Author:

**Author
Contact:**

Map Notes: Location #1 in map

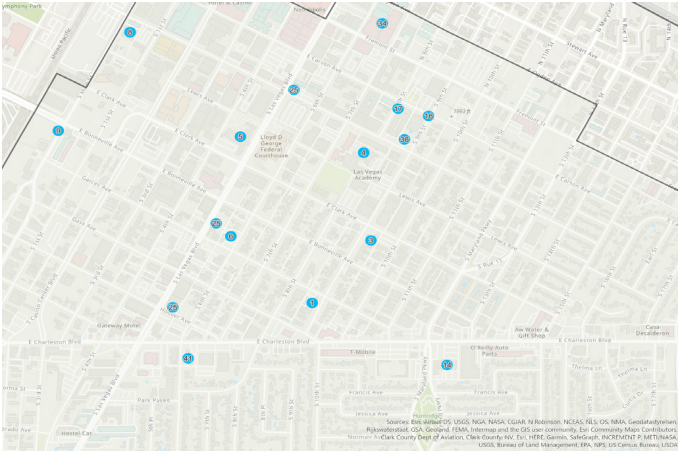

City of Las Vegas Historic Resource Reports

Title: Mesquite Club City of Las Vegas Historic Register Nomination

Type: Local Register Nomination **Ward:** 3

Date: **Project Year:**

Project Area: 702 E. St. Louis
Las Vegas, NV 89101

Period of Significance:

Description:
Application for City of Las Vegas Historic Designation

Findings:

Notes:
Application not available. Refer to the City of Las Vegas Historic Preservation Officer for more information

SHPO Report #:

NRIS #:


Federal Agency:

Client:

Author:

Author Contact:

Map Notes: Location #2 in map

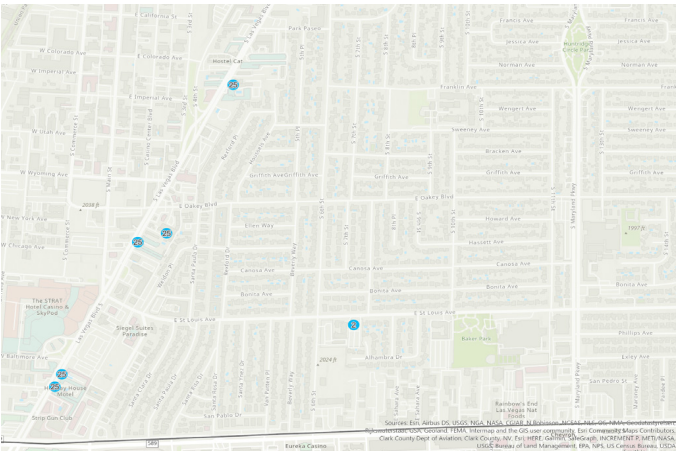

City of Las Vegas Historic Resource Reports

Title: Church of Jesus Christ of Latter Day Saints Historic Building Survey Project

Type: Historic Resource Survey **Ward:** 3

Date: 5/17/1976 **Project Year:** 1976

Project Area: 501 S. 9th St.
Las Vegas, NV 89101

Period of Significance: 1932-1963

Description:

The building survey includes a condition assessment, building history, floor plan sketches, ownership history, and photographs.

Findings:

The survey does not include an assessment of the buildings historic integrity or NRHP eligibility.

Notes:

The building still retains its architectural integrity.

The survey is over 40 years old; an updated survey is recommended.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: Dr. Ralph Roske UNLV History #225

Author: Verna May Holley (student)

Author Contact: UNLV Special Collection
4505 South Maryland Pkwy.
Box 457010
Las Vegas, Nevada
89154-7010
(702) 895-2234

Map Notes: Location #3 in map

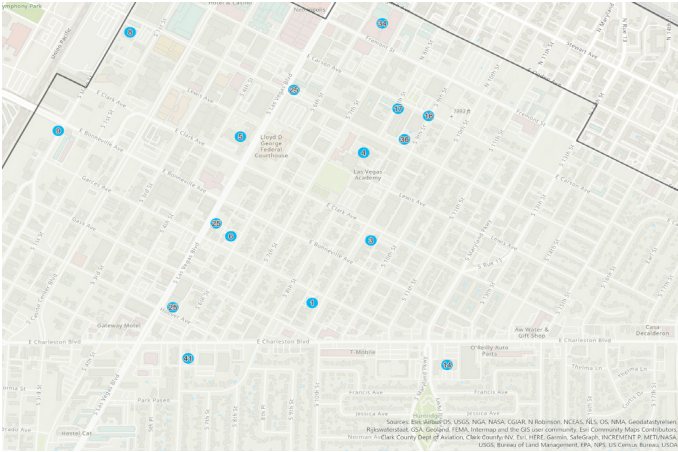

City of Las Vegas Historic Resource Reports

Title: Las Vegas High School Academic Building and Gymnasium National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 3

Date: 7/11/1986 **Project Year:** 1984

Project Area: 315 S 7th St., Las Vegas, NV 89101

Period of Significance: 1930-1931


Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria A and C, Architecture and Education

Notes:
Buildings identified in Historic Resources of Central Las Vegas, 1984.
The nomination is over 30 years old; an updated inventory is recommended.

SHPO Report #: n/a
NRIS #: 86002293
Federal Agency: n/a
Client: unknown
Author: Kathryn Kuranda, NV Division of Historic Preservation and Archaeology
Author Contact: Contact info on record:
201 S. Fall St. Room 106.
Carson City, NV

Map Notes: Location #4 in map

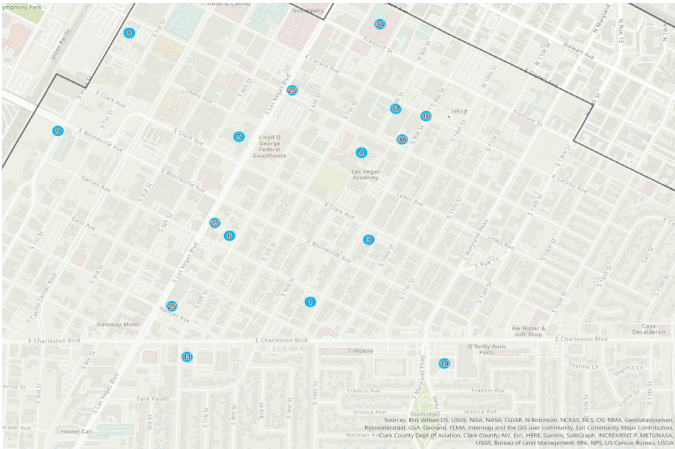

City of Las Vegas Historic Resource Reports

Title: Jay Dayton Smith House National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 3

Date: 7/31/1986 **Project Year:** 1986

Project Area: 624 S. Sixth St.
Las Vegas, NV 89101

Period of Significance: 1931-1932

Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria C: Architecture, Spanish Colonial Revival

Notes:
Identified in the 1984 Clark County Historic Property Survey
The nomination is over 30 years old; an updated inventory is recommended.

SHPO Report #: n/a

NRIS #: 87000077

Federal Agency: unknown


Client: unknown

Author: Rainshadow Associates
Anabeth Koval

Author Contact: Contact information on record:
P.O. Box 352
Carson City, NV 89702

No current contact information available

Map Notes: Location #6 in map

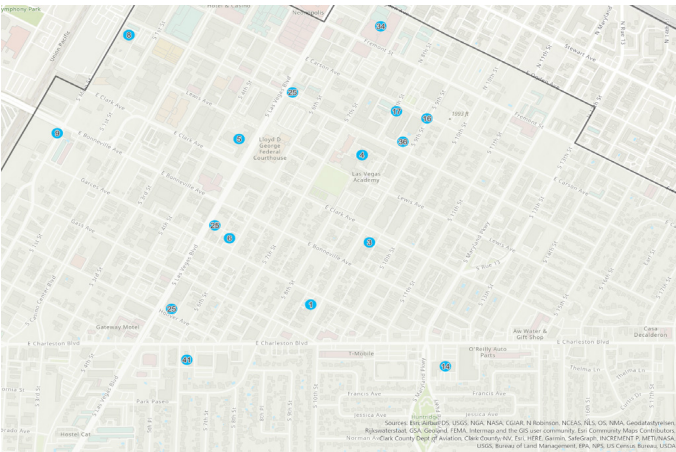

City of Las Vegas Historic Resource Reports

Title: Las Vegas High School Neighborhood Historic Resources Survey - Volumes I & II

Type: Historic Resource Survey

Ward: 3

Date: 1988

Project Year: 1988

Project Area: The area which was surveyed extends roughly from Sixth St. to Ninth St., and Gass Ave to Clark Ave.

Period of Significance: 1928-1941

Description:

During 1987-1988, the Nevada State Museum and Historical Society conducted an intensive survey of an approximately twelve block area to the southwest of the Las Vegas High School, under a grant from the National Park Service, the Department of the Interior, administered by the Nevada Division of Historic Preservation and Archeology. The purpose of this survey was to provide current and historical data to be used in a nomination of the area to the National Register of Historic Places as a historic district. The survey was a follow-up to a more general survey of historic resources of Las Vegas which was conducted by the Nevada Historical Society in 1984.

Findings:

Within the boundaries of the survey area, there are 133 separate properties. Of these, 21 are noncontributing either because they were built after 1945 or because they have been substantially altered. Many of the contributing structures have garages which have been converted to office or living space, without, however, altering the appearance significantly.

Notes:

Survey is over 30 years old; a survey update is recommended.

SHPO Report #: A_138

NRIS #: n/a


Federal Agency: n/a

Client: Nevada State Division of Historic Preservation

Author: Nevada State Museum & Historical Society Las Vegas (Nevada State Museum Las Vegas)

Author Contact: 309 S. Valley View Blvd.
Las Vegas, NV 89107
(702) 486-5205

Map Notes:

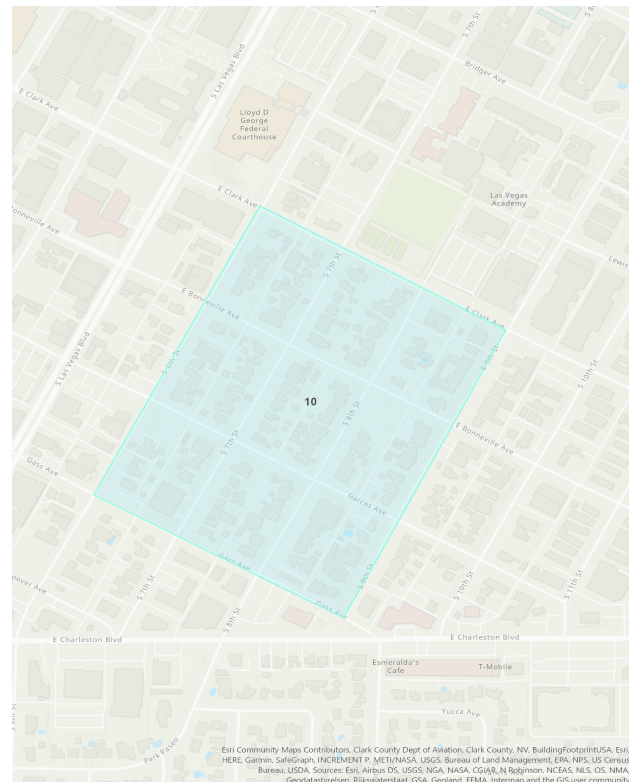

City of Las Vegas Historic Resource Reports

Title: Wildcat Country: Las Vegas High School and its Neighborhood 1930-1945

Type: Historic Context **Ward:** 3

Date: 1989 **Project Year:** 1988

Project Area: The area roughly bounded by 6th St., Garces Ave, 9th St., and Clark Ave.

Period of Significance: 1930-1945

Description:

This publication is developed from a 1988 Nevada State Museum & Historical Society survey of Las Vegas High School and the surviving residential area just to the south.

Findings:

This historic neighborhood, mostly built in the thirties, constitutes a living reminder of an important part of Las Vegas history. The wide, tree-lined streets, the eclectic mixture of architectural styles, and just as importantly, the lives of the people who lived there, make up a part of the community's heritage which needed to be recorded and told.

Notes:

The context is over 30 years old; an updated context is recommended.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: n/a

Author: Dorothy Wright, Nevada State Museum and Historical Society Las Vegas (Nevada State Museum Las Vegas)

Author Contact: 309 S. Valley View Blvd.
Las Vegas, NV 89107
(702) 486-5205

Map Notes:



City of Las Vegas Historic Resource Reports

Title: Las Vegas High School Neighborhood Historic District National Register of Historic Places Nomination

Type: National Register Nomination

Ward: 3

Date: 12/1/1990

Project Year: 1990

Project Area: District roughly bounded by E. Bridger St.; S. 9th St.; E. Gass St.; S. 6th St.

Period of Significance: 1928-1941

Description:

National Register of Historic Places Nomination

Findings:

Significant under Criteria A and C: Architecture and Community Planning/Development
150 contributing and 86 noncontributing buildings

Notes:

Survey is 30 years old; a survey update is recommended.

SHPO Report #: n/a

NRIS #: 90002204

Federal Agency: n/a

Client: unknown

Author: Dorothy Wright and Richard A. Bernstein,
Division of Historic Preservation and
Archaeology

Author Contact: Contact info on record:
123 W. Nye Lane
Carson City, NV 89701

No current contact information available.



City of Las Vegas Historic Resource Reports

Title: Green Shack National Register of Historic Places Nomination

Type: National Register Nomination

Ward: 3

Date: 5/20/1993

Project Year: 1993

Project 2504 East Fremont St.

Area: Las Vegas, NV 89104

Period of Significance: 1932-1943

Description:

National Register of Historic Places Nomination

Findings:

Significant under Criteria A, Commerce

One contributing building.

Notes:

The building has been demolished. Update NRHP nomination as needed.

SHPO Report #: n/a

NRIS #: 94000552

Federal Agency: n/a

Client: n/a

Author: Frank Wright, Nevada State Museum and
Historical Society Las Vegas (Nevada State
Museum Las Vegas)

Author 309 S. Valley View Blvd.
Contact: Las Vegas, NV 89107
(702) 486-5205

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Huntridge Theater National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 3

Date: 2/22/1993 **Project Year:** 1993

Project Area: 1208 E. Charleston Blvd.
Las Vegas, NV 89104

Period of Significance: 1943-1944

Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria A and C: Entertainment/Recreation and Architecture

Notes:
An update of the historic context and the architectural narrative is recommended for a more comprehensive historic documentation of the property.

SHPO Report #: n/a

NRIS #: 93000686


Federal Agency: n/a

Client: n/a

Author: Richard Lenz, Huntridge Performing Arts Theater

Author Contact: Contact info on file:
1208 E. Charleston Blvd.
Las Vegas, NV 89104
(702) 477-7069

Map Notes: Location #14 in map

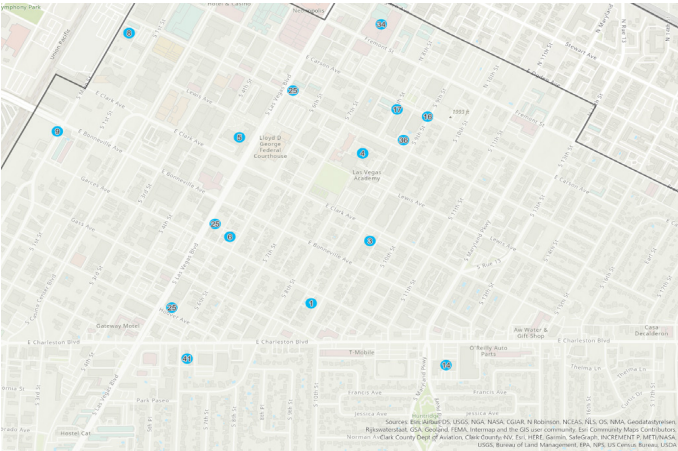

City of Las Vegas Historic Resource Reports

Title: A Historical Architectural Survey and National Register of Historic Places Eligibility Recommendations for Structures Present Along a One-Mile Corridor between Sahara

Type: Section 106 Review

Ward: 3

Date: 05/25/1999

Project Year: 1998

Project Area: APE is bounded by I-15, Union Pacific Railroad tracks, Sahara Ave and Charleston Blvd.

Period of Significance: <1948

Description:

The Nevada Department of Transportation (NDOT), in cooperation with the Federal Highway Administration (FHWA) and the city of Las Vegas, will reconstruct/modify the Interstate-15/Sahara Avenue Interchange, widen northbound 1-15 with two additional lanes from Sahara Avenue to Charleston Boulevard and reconstruct and reconfigure the I-15/Charleston Boulevard northbound off ramp.

Findings:

The Historic Resource Survey reveals that in 1998 there were no individual properties and no potential historic districts which may be eligible for listing on the National Register of Historic Places within the Area of Project Effect and the Area of Visual Effect. No buildings were found which met the minimum 50-year criterion for eligibility at the time. There were, however, about 28 buildings which were currently at least 40-years-old at the time of the survey. They should be reevaluated at their dates of attaining 50 years of age to determine their status as individually eligible properties or as contributors to a potential district. At the time of this survey these buildings were recognized as having the potential of being contributors to a historic district in the year 2008, should they possess sufficient architectural integrity and historic significance at that time.

Notes:

Project is over 20 years old. An updated study is recommended to assess the integrity of the 28 identified buildings that have now reached the age threshold for historic designation.

SHPO Report #: A_121

NRIS #: n/a


Federal Agency: FHWA

Client: City of Las Vegas

Author: Ryden Architects, Inc. and The Louis Berger Group, Inc. (acquired by SWP)

Author Contact: Ryden Architects, Inc.:
902 W McDowell Rd
Phoenix, AZ 85007
(602) 253-5381
thefrontdoor@rydenarchitects.com

Map Notes:

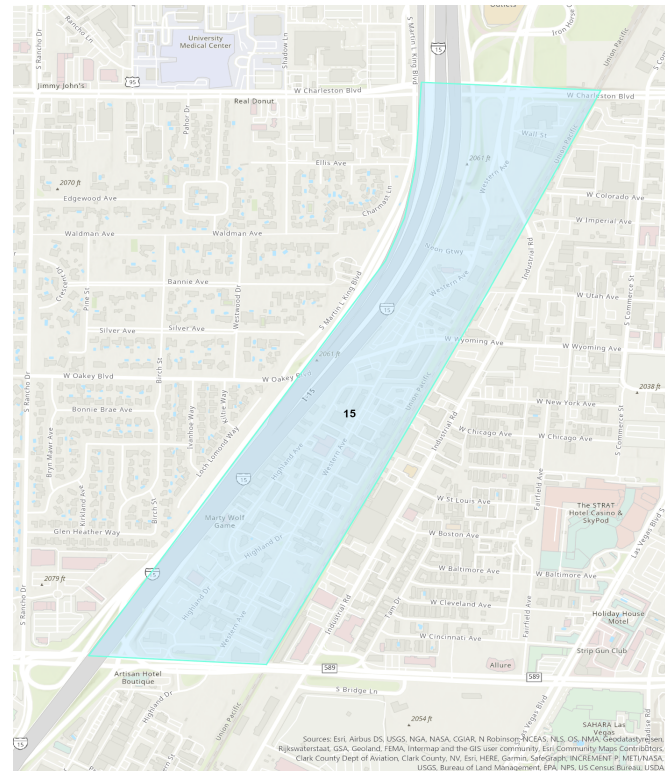

City of Las Vegas Historic Resource Reports

Title: Historic Resources Inventory Form: 200 S. Ninth Street, Las Vegas, NV 89101 - SDASHS City Center Apartment Project

Type: Inventory **Ward:** 3

Date: 6/20/2001 **Project Year:** 2001

Project Area: 200 S. 9th Street, Las Vegas, NV 89101

Period of Significance: 1929

Description:

Historic Resource Inventory Form including a continuation sheet, associated structures summary form, location map, and photographs.

Findings:

The building has lost its architectural integrity due to incompatible renovations. It also does not meet the NRHP criteria for nomination, as its design, setting, materials, workmanship, feeling, and association have been compromised.

Notes:

Building has been demolished.

SHPO Report #: A_89

NRIS #: n/a

Federal Agency: n/a


Client: City of Las Vegas

Author: City of Las Vegas

Author 495 S. Main St.

Contact: Las Vegas, NV 89101

Map Notes: Location #16 in map

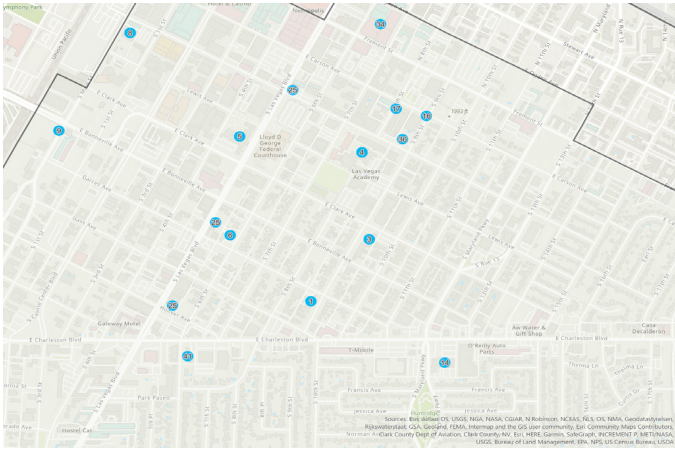

City of Las Vegas Historic Resource Reports

Title: Historic Resources Inventory Form: 221 S. Eighth Street, Las Vegas, NV 89101 - SDASHS City Center Apartment Project

Type: Inventory **Ward:** 3

Date: 6/20/2001 **Project Year:** 2001

Project Area: 221 S. 8th Street, Las Vegas, NV 89101

Period of Significance: 1931

Description:

Historic Resource Inventory Form including a continuation sheet, associated structures summary form, location map, and photographs.

Findings:

The building has lost its architectural integrity due to incompatible renovations. It also does not meet the NRHP criteria for nomination, as its design, setting, materials, workmanship, feeling, and association have been compromised.

Notes:

Building has been demolished.

SHPO Report #: A_88

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: City of Las Vegas

Author Contact: 495 S. Main St.
Las Vegas, NV 89101

Map Notes: Location #17 in map

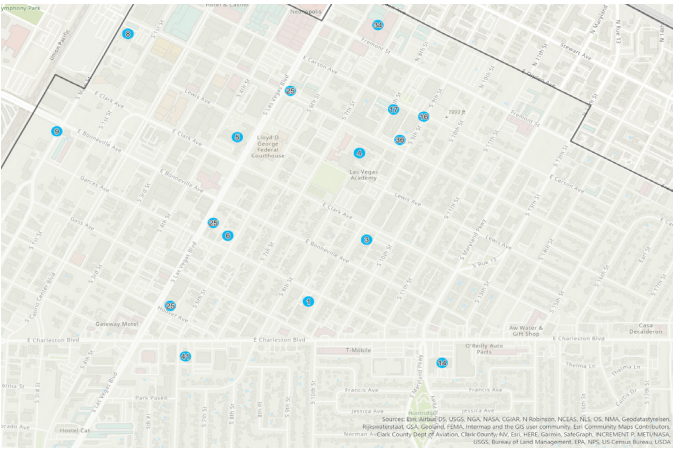

City of Las Vegas Historic Resource Reports

Title: John S. Park Historic District National Register of Historic Places registration form

Type: National Register Nomination

Ward: 3

Date: 10/1/2002

Project Year: 2001

Project Area: Historic District boundaries: Las Vegas Boulevard and South Ninth Street to the west and east, and Charleston Boulevard and Franklin Avenue to the north and south, respectively.

Period of Significance: 1931-1952.

Description:

NRHP Nomination of the John S. Park Historic District under Criteria A and C, significant for Community Planning and Development and Architecture (late 19th and 20th century revivals and modern architectural styles).

Findings:

The historic district in its entirety consists of 160 homes, 34 of which have been determined to be noncontributing, and a small park, which is also noncontributing. The general boundaries of the John S. Park Historic District are Las Vegas Boulevard and South Ninth Street to the west and east, and Charleston Boulevard and Franklin Avenue to the north and south, respectively. The earlier Park Place Addition is located on the western half of the historic district and currently includes the west side of Fifth Place and the west side of S. Sixth Street on the west and east, and the south side of Park Paseo and roughly Franklin Avenue on the north and south, respectively. The Vega Verde Addition is bounded by the east side of S. Sixth Street and the west side of S. Ninth Street on the west and east, and the north side of Park Paseo and the north side of Franklin Avenue on the north and south, respectively.

Notes:

HPF 32-01-16428

Project is almost 20 years old; an updates study is recommended.

SHPO Report #: 21319

NRIS #: n/a


Federal Agency: HPF

Client: City of Las Vegas

Author: Mooney, Courtney (20th Century Preservation)

Author Contact: 1608 Houssels Ave.
Las Vegas, NV 89104
(702) 858-3885

Map Notes:

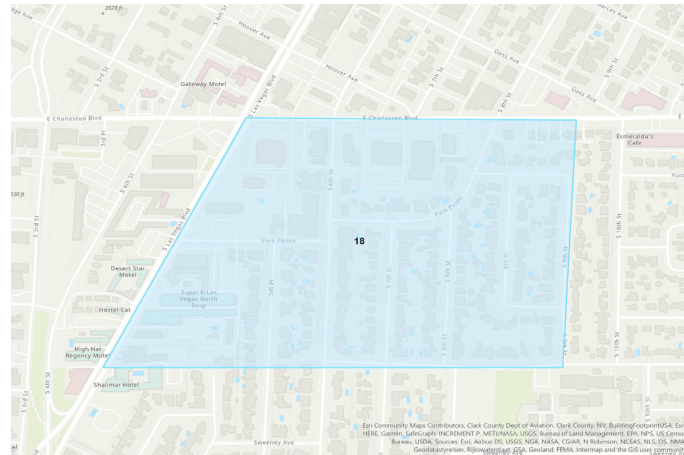

City of Las Vegas Historic Resource Reports

Title: L'Octaine Housing and Retail Development Project (No report; resource forms only)

Type: MISSING/UNKNOWN

Ward: 3

Date: **Project Year:** 2001

**Project
Area:**

Period of Significance:

Description:

Findings:

Notes:

SHPO July 2021: Do not expect a proper report as this undertaking was a series of correspondence over 3 months in 2001.

SHPO Report #: 5481

NRIS #: n/a

Federal Agency:

Client:

Author:

**Author
Contact:**

Map Notes:

City of Las Vegas Historic Resource Reports

Title: The Cottages: A Property Survey
Type: Historic Resource Survey
Ward: 3
Date: 12/01/2001
Project Year: 2001

Project Area: The survey area is bounded by Garces Ave, Casino Center Blvd., Clark Ave, and Third St.

Period of Significance: 1909-1911

Description:

The focus of this investigation is to document all of the remaining Union Pacific Cottages built on blocks 23-26 of the Clark Las Vegas Townsite between 1909-1911, to identify these cottages by their original construction floor plan, and to make critical determinations as to the current condition based on the amount of remaining original features. The purpose of this investigation is to provide information that might be of use for preservation purposes.

Findings:


At the time of this survey, only 13 cottages remained in downtown Las Vegas. Included in the 13 were six five-room cottages located at 601, 609, 617 and 625 South Casino Center Boulevard, 612 South 3rd Street, and 604 South 4th Street. Seven remaining four-room cottages were located at 605, 621 and 629 South Casino Center Boulevard, 521, 608 and 616 South 3rd Street, and 608 South 4th Street.

Notes:

Survey is over 20 years old; a survey update is recommended.

SHPO Report #: A_124
NRIS #: n/a
Federal Agency: unknown
Client: unknown
Author: Thomson, Joe
unknown

Author Contact:
Map Notes:

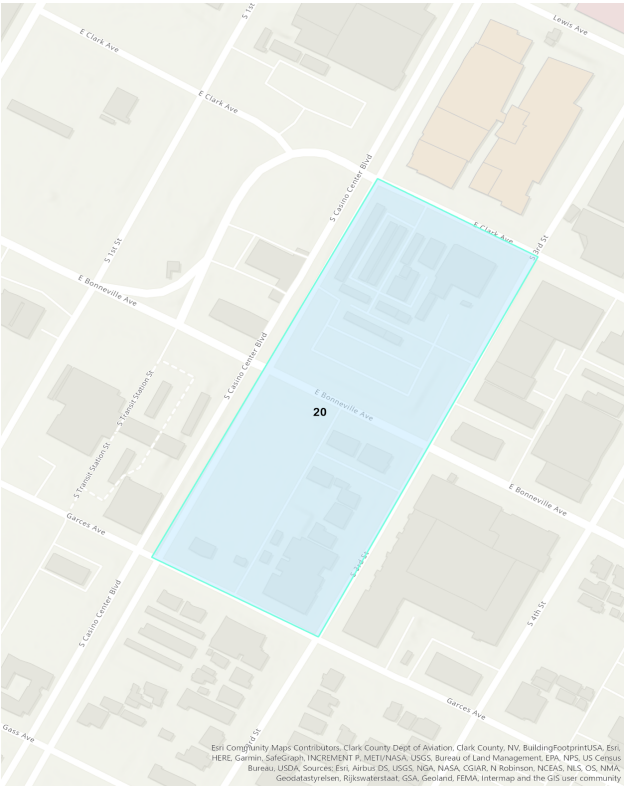

City of Las Vegas Historic Resource Reports

Title: Beverly Green/Southridge Neighborhood Plan

Type: Planning/Redevelopment Study **Ward:** 3

Date: 6/1/2003 **Project Year:** 2002

Project Area: Neighborhood bounded by Las Vegas Blvd., Oakey Ave, Maryland Pkwy, and Sahara Ave.

Period of Significance: 1950-1960

Description:

Neighborhood plan for the Beverly Green/Southridge neighborhoods addressing demographics, current conditions, existing land use, public safety, traffic issues and an action plan.

Findings:

Planning Team members discussed the issues, strategies, and goals of their neighborhood plan and developed the prioritized action plan as called for by city of Las Vegas Resolution R-27-98. The topics and order of importance to the community are as follows: Property Condition, Land Use, Traffic Mitigation, and Public Safety.

Notes:

Project is 20 years old; an updated study is recommended

Contains information of original owners/residents of the neighborhood.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: City of Las Vegas

Author Contact: 495 S. Main St.
Las Vegas, NV 89101
Planning Department

Map Notes:

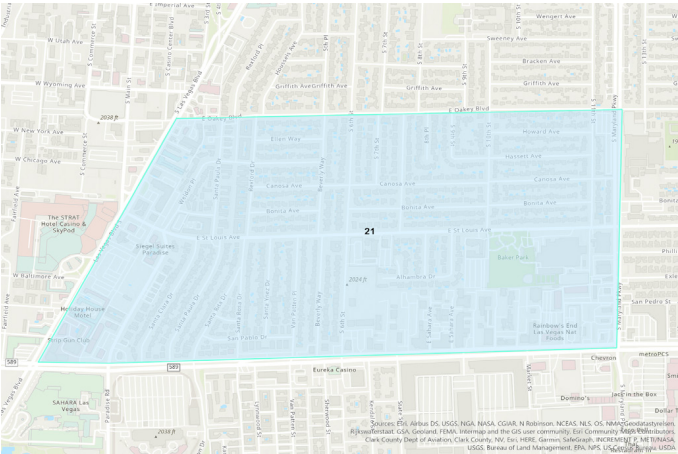

Title: Las Vegas Main Street Historic District National Register of Historic Places Nomination Submission

Ward: 3

Project Year: 2003

Project Area: Roughly 800-1400 blocks of Commerce, Main, First, Casino Center and cross streets in Downtown Las Vegas

Period of Significance: 1925-1965

Description:

National Register of Historic Places Nomination

Findings:

Significant under Criteria A and C: Commerce and Architecture

Notes:

City of Las Vegas has a copy of the complete application. It has been digitized and included with the SHPO report.

Project is over 10 years old; an updated study is recommended. The nomination was not approved.

SHPO Report #: 7058

NRIS #: n/a

Federal Agency: n/a

Client: City of Las Vegas

Author: Civic Visions LP

Author 2029 Walnut St.
Contact: Philadelphia, PA 19103
(215) 563-1555
info@civicvisions.net

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Mayfair Homes Historic Resources Survey and Inventory, City of Las Vegas

Type: Historic Resource Survey

Ward: 3

Date: 9/1/2003

Project Year: 2003

Project Area: The boundaries for the survey are Fremont Street and Charleston Boulevard on the north and south, and S. Fifteenth Street and Bruce Street on the west and east, respectively.

Period of Significance: 1942-1953

Description:

20th Century Preservation, an independent historic preservation consulting firm under the employ of the City of Las Vegas Planning and Development Department, conducted a historic resource survey of Tracts 1 and 2 of the Mayfair Homes neighborhood, located east of Downtown Las Vegas, to formally inventory and document the existing historic properties. The results of this Reconnaissance Level survey will be used by the Planning and Development Department, as well as the Neighborhood Services Department as a preservation planning tool during future revitalization and development efforts for this historically rich area.

Findings:

As a result of this survey, 20th Century Preservation has determined that the Mayfair Homes, specifically the first two phases included in this survey, are not eligible for inclusion into the National Register of Historic Places. Although the homes were built according to prescribed FHA standards, reflecting the "Picturesque suburban ideal" with curved, narrow streets and limited access from the main roads, the homes have undergone significant alterations and additions. It is difficult to get a sense of what the homes might have originally looked like because they have changed so much.

This is not to say that the neighborhood does not have any historic value. The Mayfair Homes exist because Las Vegas, declared a "defense city" during World War II, received funding to build homes to satisfy an enormous demand. The Mayfair Homes should be included as a component to any further studies of World War II housing in Las Vegas.

Because the first two tracts of the Mayfair Homes were determined to be ineligible for inclusion into the National Register, a continued survey of Tract 3 located above Charleston Boulevard, is not recommended.

Notes:

Project is near 20 years old; an updated study is recommended.

HRIF's are missing.

SHPO Report #: 7437

NRIS #: n/a

Federal Agency: HPF

Client: City of Las Vegas

Author: Mooney, Courtney (20th Century Preservation)

Author Contact: 1608 Houssels Ave.
Las Vegas, NV 89104
(702) 858-3885

Map Notes:



City of Las Vegas Historic Resource Reports

Title: Huntridge Tracts 1 and 2 Historic Resource Survey and Inventory

Type: Historic Resource Survey **Ward:** 3

Date: 8/1/2005 **Project Year:** 2005

Project Area: The survey area includes the following: S. 10th Street from Charleston Boulevard to Franklin Avenue; Yucca Avenue from S. 10th Street to Francis Avenue; Francis Avenue from S. 10th Street to Maryland Parkway; Jessica Avenue from S. 10th Street to Maryland Parkway; Norman Avenue from S. 10th Street to Maryland Parkway; and the north side of Franklin Avenue between S. 10th Street and Maryland Parkway.

Period of Significance: 1941-1950

Description:

The purpose of this focused survey and inventory was to assess the historic importance of the Huntridge neighborhood, identify the context within which it developed, and document a representative sample of the properties to evaluate their historic and architecture importance and integrity. The historic and architectural resource survey and inventory documents all sites within Huntridge Tracts 1 and 2, with the exception of the commercial properties along Charleston Boulevard, with photographs and Historic Resource Inventory Forms (HRIF). In addition, a historic context statement was prepared to help assess the importance of the properties within the context of Las Vegas' history and the value of the buildings within the context of mid-twentieth century residential design.

Findings:

It was found that the Huntridge neighborhood represents an early example of the most progressive community-oriented planning that was done under the auspices of the Federal Housing Administration (FHA) in the 1940s. However, the Huntridge neighborhood is not recommended for further survey work or for nomination as a historic district due to the low level of integrity for the individual houses. The amount of change seen in the homes precludes the subdivision from having the number of contributing resources needed for a historic district.

Notes:

Project is over 10 years old; an updated study is recommended.

HRIF's are missing

SHPO Report #: 7033

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: Painter, Diana (Painter Preservation)

Author Contact: Sonoma Office:
388 Patten Street
Sonoma, CA 95476
E-mail: diana@preservationplans.com
Telephone: (707) 763-6500

Map Notes:

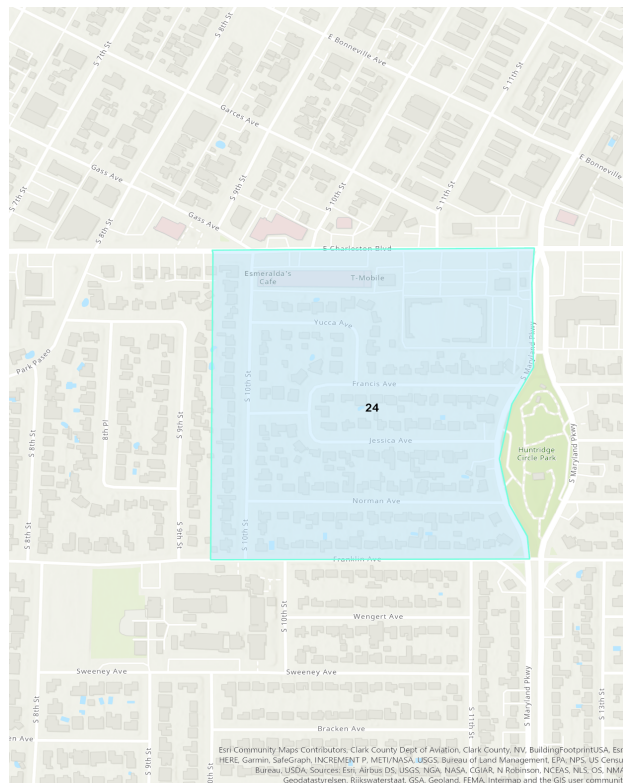

City of Las Vegas Historic Resource Reports

Title: Wedding Chapels of Downtown Las Vegas Blvd.: Historic Resource Survey and Inventory

Type: Historic Resource Survey

Ward: 3

Date: 9/20/2005

Project Year: 2005

Project Area: Las Vegas Boulevard between Carson Ave and St. Louis Ave.

Period of Significance: 1940-1955

Description:

This survey and inventory documents the wedding chapels of downtown Las Vegas Boulevard that are within the Las Vegas Boulevard Scenic Byway and are in buildings 50 years of age or older. They are located within the Scenic Byway between Carson Avenue on the north and St. Louis Avenue on the south. They are located in buildings that date from 1925 to 1955, with most of the buildings being constructed in the early 1950s.

Findings:

The wedding chapels of downtown Las Vegas Boulevard play an important role in the history of the city and in particular in its tourist-oriented economy. The marriage industry, as it has come to be called, began in Las Vegas in the late 1920s and continued to grow with the city. The wedding chapels house this industry, but in a way are the most ephemeral part of it. Wedding chapels are housed in motels and other commercial business buildings; in freestanding buildings, often former houses; and, particularly in the case of the newer chapels, in hotel-casinos. They are seldom located in buildings purpose-built to house a chapel.

For these reasons and because of the competitive nature of the business, wedding chapels are in a constant state of change. This in turn leads to issues of architectural integrity in many of the buildings. So while the iconography of the chapels - the signs, the steeple, the arbor or gazebo, the gothic or round-arched windows, the chapel and pews - remains quite constant, the buildings themselves change, the businesses move into new buildings, and the businesses change names. This does not undermine the importance of the industry to Las Vegas history, or the importance of the chapels along the Strip. It does affect the ability of the chapels to form a multiple-property historic district. It is recommended here that the wedding chapels of downtown Las Vegas Boulevard not be nominated to the National Register of Historic Places for reasons of architectural integrity.

Notes:

Exhibits and Appendices are saved on CD as separate files.

Survey is over 10 years old; a survey update is recommended.

SHPO Report #: n/a


NRIS #: n/a

Federal Agency: n/a

Client: City of Las Vegas

Author: Painter, Diana

Author Contact: Sonoma Office:
388 Patten Street
Sonoma, CA 95476
E-mail: diana@preservationplans.com
Telephone: (707) 763-6500

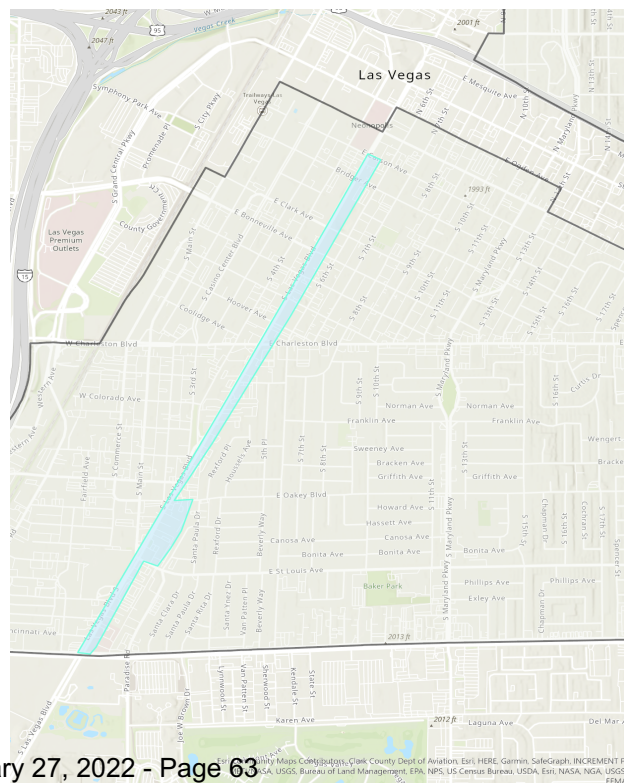

City of Las Vegas Historic Resource Reports

Title: Historic Properties Inventory, Central City Intermodal Transportation Terminal, Las Vegas, Clark County, Nevada

Type: Section 106 Review **Ward:** 3

Date: 2/1/2007 **Project Year:** 2007

Project Area: Downtown Las Vegas, between Bonneville Ave. and Garces Ave, north and south, and Main St./Commerce and Casino Center, west and east

Period of Significance: <1967

Description:

In December 2006 , Post, Buckley, Schuh and Jernigan, Inc. (PBS&J), contracted with Marshall Historical Consulting (MHC) to conduct a historic properties inventory for the proposed Central City Intermodal Transportation Terminal (CCITT) project, located in downtown Las Vegas, Clark County, Nevada. The project involves construction of a city bus terminal in one of two selected alternative locations. The inventory covered the two alternatives, plus a previously agreed upon area of potential affect (APE) surrounding each alternative. The inventory was conducted between January 9 and 12, 2007.

Findings:

Of the 77 parcels of land inspected, 27 were identified as being built during or prior to 1967. Of these 27 parcels, three (3) properties are eligible to the National Register of Historic Places (NRHP).

Notes:

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 517

NRIS #: n/a

Federal Agency: FTA

Client: Regional Transportation Commission of

Author: Marshall, Sandra L. (Marshall Historical Consulting)

Author 188 Sussex Place

Contact: Carson City, NV 89701

Map Notes:



City of Las Vegas Historic Resource Reports

Title: National Register of Historic Places Evaluation of Ryland Taylor Hall Armed Forces Reserve Center

Type: Other (refer to notes) **Ward:** 3
Date: 9/1/2007 **Project Year:** 2007

Project Area: 2901 E Sahara Ave, Las Vegas, NV 89104

Period of Significance: <1957

Description:

In 2005, the United States Army Reserve (USAR) 63D Regional Readiness Command (RRC) contracted with PAR Environmental Services, Inc., (PAR) for assistance in complying with Section 110 of the National Historic Preservation Act (NHPA), particularly in regards to the potential Cold War resources not examined in earlier studies. PAR's tasks were threefold. Archaeological record searches and surveys were conducted at selected USAR-owned or leased facilities to identify prehistoric and historical archaeology sites within or adjacent to each facility. Historical research was completed to compile data towards reconstructing the USAR role during the Cold War and placing these facilities within a nationwide context. Architectural surveys were conducted to document the overall design of each facility, additions or modifications and other changes in integrity through time. All identified buildings, structures, sites and objects were evaluated in light of National Register of Historic Places (NRHP) criteria found in 36 CFR 60.4.


Findings:

Two facilities in Nevada (Ryland Taylor Hall AFRC [Armed Forces Reserve Center] and AMSA [Area Maintenance Support Activities] 96 BMA) were evaluated for this task, in addition to 42 other facilities in California and Arizona. Both facilities are on one parcel of land in Las Vegas. Neither facility in Nevada appears potentially eligible for inclusion in the NRHP.

Notes:

Section 110 Review.
Project is over 10 years old; an updated study is recommended.

SHPO Report #: 6550
NRIS #: n/a
Federal Agency: U.S. Army Reserve
Client: U.S. Army Reserve
Author: PAR Environmental Services, Inc.
Author Contact: Office Location:
1906 21st Street
Sacramento, CA 95811
Postal Address:
P.O. Box 160756
Sacramento, CA 95816-0756
Main Phone:
(916) 739-8356
Map Notes: Location #27 in map

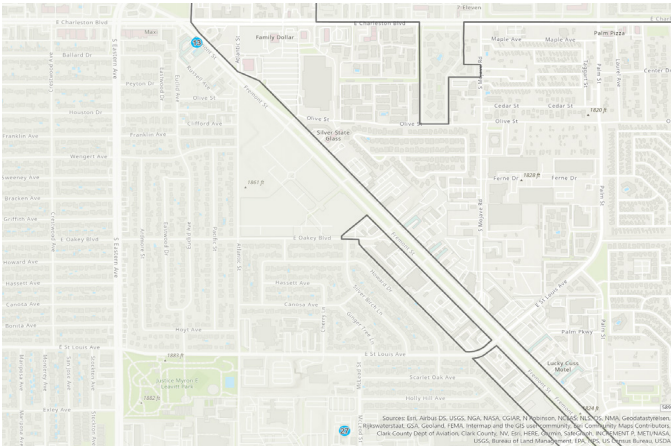

City of Las Vegas Historic Resource Reports

Title: Section 106 Stupak Community Center Historic Resources Survey Report

Type: Section 106 Review

Ward: 3

Date: 9/1/2007

Project Year: 2007

Project Area: APE is bounded by St. Louis Ave, Fairfield Ave, Tam Drive, and Cleveland Ave and consists of approximately 1.24 acres.

Period of Significance: <1957

Description:

In anticipation of using Community Development Block Grant Funds (CDBG) to develop and construct the new Stupak Community Center located in Meadows Village, the City of Las Vegas commissioned RAFI Planning, Architecture and Urban Design to complete an Historic Resources Survey Report in compliance with the Nevada Section 106 Architectural Inventory and Survey process. To that end, the following report was undertaken during the months of August and September of 2007 by Dr. Robert A. Fielden, AIA, NCARB and Ms. Laura Jane Spina, RID, APA, NCIDQ, with assistance from researcher and RAFI Resident, Ms. Andi Brosche.

Findings:

The following seven (7) properties were considered eligible to the national register under criteria C and A.

230 W. Boston Ave (Built 1955)
236 W. Boston Ave (Built 1953)
234 W. Cleveland Ave (Built 1955)
238 W. Cleveland Ave (Built 1952)
2006 Fairfield Ave (Built 1941)
2010 Fairfield Ave (Built 1944)
209 W. Boston Ave (C. 1910; 1941)

The SHPO also concurs with the City's determination of 'No Adverse Effect' for the subject undertaking.

Notes:

Project is over 10 years old; an updated study is recommended.

(Note: For information regarding determinations of eligibility for the remaining properties within the project Area of Potential Effect (APE), please see correspondence dated 11/21/2007).

Appendix C: HRIF's not included.

SHPO Report #: 1442

NRIS #: n/a


Federal Agency: HUD

Client: City of Las Vegas

Author: RAFI Planning, Architecture, Urban Planning

Author Contact: 155 S Water St., Henderson, NV 89015
(702) 435-7234
info@rafiarchitecture.com

Map Notes:

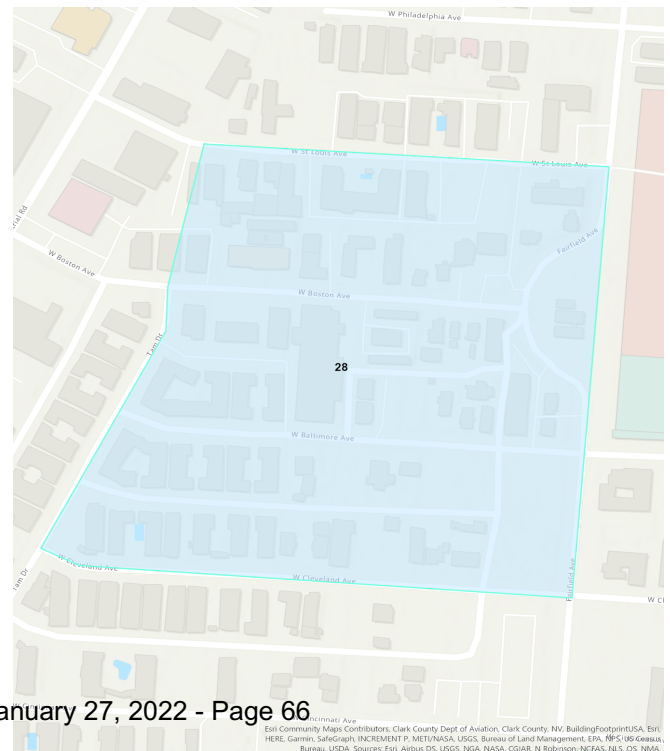

City of Las Vegas Historic Resource Reports

Title: The Alta Vista, Acres, Oakridge Tracts: A Survey and Inventory in Las Vegas, Clark County, Nevada

Type: Historic Resource Survey

Ward: 3

Date: 10/1/2009

Project Year: 2009

Project Area: The 44.4- acre survey area contains 176 parcels in an area bounded by East St. Louis Avenue to the south, South 6th Street to the west, East Oakey Boulevard to the north, and South 10th Street to the east.

Period of Significance: 1950-1960

Description:

Kautz Environmental Consultants, Inc. contracted with the City of Las Vegas in July 2009 to conduct the first phase of a two-phase survey and inventory of the Southridge Neighborhood. Phase I comprises four Alta Vista, Acres, Oakridge tracts and several individual parcels. The current project is part of an ongoing effort to survey and inventory the historic neighborhoods in the City to be used as a planning tool by the Planning and Development Department, the Neighborhood Services Department, and the Historic Preservation Commission.

Findings:

The properties in the survey area were evaluated against the historical themes of Land Usage: Townsite Development and City Planning and Architecture. The period of significance for both themes is 1950 to 1960, which represents both the period during which the area was being subdivided into the six tracts and two unaffiliated blocks (relating to the city planning theme) and the decade in which the Contemporary style of architecture was flourishing. These themes are closely tied under the broader theme of the growth of American suburbia.

The Southridge Neighborhood Phase I survey and inventory resulted in the identification of thirty-five (35) buildings that individually meet the National Register of Historic Places eligibility criteria, sixty-one (61) that do not, and seventy four (74) that, while not individually eligible, would be contributing elements to a potential historic district. Six properties were left unevaluated.

Notes:

CLG funded project.

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 7044

NRIS #: n/a


Federal Agency: HPF

Client: City of Las Vegas

Author: Kautz Environmental Consultants, Inc.

Author Contact: 1140 Financial Blvd., Suite 100
Reno, Nevada 89502
phone. 775-829-4411

Map Notes:

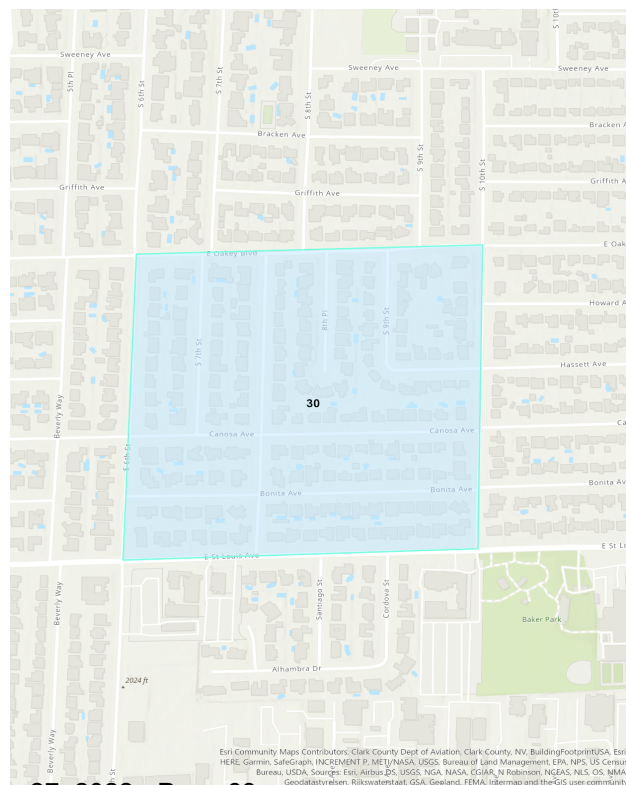

City of Las Vegas Historic Resource Reports

Title: The Huntridge and Southridge Tracts: Phase II Survey and Inventory of the Southridge Neighborhood, Las Vegas, Clark County, Nevada

Type: Historic Resource Survey

Ward: 3

Date: 9/20/2010

Project Year: 2010

Project Area: The 42.5 acre Phase II survey contains 192 parcels in an area bounded by East St. Louis Avenue to the south, South 10th Street on the west, South Maryland Parkway on the east, and East Oakey Boulevard to the north.

Period of Significance: 1942-1959 (Townsite Development and City

Description:

In June 2010, KEC contracted with the City to conduct the second phase of the Southridge Neighborhood survey. Phase II comprises six Southridge tracts, a portion of Huntridge Tracts 4 and 5, and various individual parcels. The purpose of this survey is to continue the documentation of Las Vegas's post-World War II housing tracts.

Findings:

There are a total of 192 properties in the Phase II survey area. Of the 192, six (6) parcels are currently parking lots, one (1) parcel is vacant, and one (1) parcel contains a modern house built in 2004. A total of 184 parcels contain buildings constructed between 1944 and 1960 (in one case, one building straddles two parcels). Of the 183 buildings, nineteen (19) are recommended eligible for listing in the National Register of Historic Places, seventy-three (73) are recommended as contributing elements to a potential historic district, and ninety-one (91) are recommended not eligible for listing in the NRHP. Only one of the properties is less than fifty years old (APN 162-03-723-010).

The properties in the survey area were evaluated against the historical themes of Land Usage: Townsite Development and City Planning and Architecture. For the properties in the Huntridge Tracts 4 and 5 the period of significance for Townsite Development and City Planning is 1942 to 1959 and for Architecture it is 1942 to 1944. The period of significance for the Southridge properties is 1950 to 1960, which represents both the time during which the area was being subdivided (relating to the city planning theme) and the decade in which the Contemporary style of architecture was flourishing. These themes are closely tied under the broader theme of the growth of American suburbia.

Notes:

HPF #32-09-21834(4)

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 7088

NRIS #: n/a


Federal Agency: HPF

Client: City of Las Vegas

Author: Kautz Environmental Consultants, Inc.

Author Contact: 1140 Financial Blvd., Suite 100
Reno, Nevada 89502
phone. 775-829-4411

Map Notes:

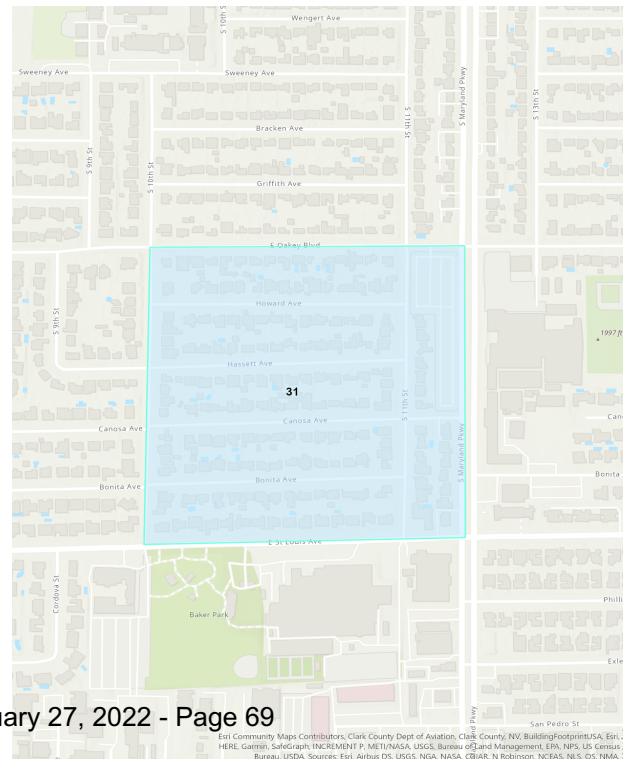

City of Las Vegas Historic Resource Reports

Title: Intensive Level Historic Resource Survey and Inventory of the Phase II Beverly Green Neighborhood: The Meadows Addition, South Fifth Tract, South Fifth Tract No. 1, and

Type: Historic Resource Survey **Ward:** 3

Date: 7/17/2012 **Project Year:** 2011

Project Area: The survey area is bounded by East Saint Louis Avenue to the north, East Sahara Avenue to the south, South Las Vegas Boulevard to the west, and Santa Rosa Drive to the east.

Period of Significance: 1950-1956

Description:

The city is conducting historic property inventories of neighborhoods over 50 years of age as a planning tool to be used by the Department of Planning, the Parks, Recreation and Neighborhood Services Department, and the Historic Preservation Commission. The City of Las Vegas Development Services Center requested that Logan Simpson Design Inc. (LSD) conduct a Historic Resource Survey and Inventory of the Phase II portion of the Beverly Green Neighborhood. The neighborhood is comprised of seven tracts-the Meadows Addition , South Fifth Street Tract, South Fifth Street Tract No. 1, and Paradise Village Tracts No. 1, 2, 3, and 4.

Findings:

The intensive level architectural survey of the Phase II Beverly Green Neighborhood resulted in the identification of 167 historic age properties, of which 124 are residential and 43 are commercial. All of the buildings are located to the east of the Las Vegas Strip, along the east side of South Las Vegas Boulevard to Santa Rosa Drive, and north of East Sahara Avenue (formerly San Francisco Street), which was at one time the southern boundary of the city of Las Vegas. The residential properties consist of both single family and multiple family dwellings that were built as part of the Paradise Village housing tracts, which were completed by Paradise Realty Company, Inc. and Tee Construction Company between 1950 and 1956. The majority of the 43 commercial properties, or 37 of these buildings, were originally single family and multiple family dwellings within the Paradise Village neighborhood that were subsequently converted for commercial use. All of these properties are located along the east and west sides of Paradise Road, the north side of East Sahara Avenue, and the south side of East Saint Louis Avenue. The remaining commercial buildings include three motels, a restaurant, a retail establishment, and an office building and showroom located along the east side of Las Vegas Boulevard.

The survey also identified the newly proposed Paradise Village Historic District. The district is recommended eligible for listing in the NRHP under Criterion A for its association with Land Usage: Townsite Development and City Planning as a representative example of post-World War II (W.W.II) suburban development in Las Vegas, and under Criterion C for its collection of post-WWII buildings constructed in the Minimal Traditional, Ranch, and Contemporary variants designed by the notable Las Vegas architecture firm, Zick and Sharp. The district is comprised of 124 residential properties, of which 77 are recommended contributing and 46 are recommended noncontributing. There is also one individually eligible property, 2321 Santa Rita Drive, within the boundaries of the Paradise Village Historic District which would also be considered a contributor. The 43 commercial buildings, including those that were historically

Notes:

The survey is now 10 years old. Plan for a survey update within the next 2 years (by 2023).

SHPO Report #: 8698

NRIS #: n/a


Federal Agency: HPF

Client: City of Las Vegas

Author: Logan Simpson Design, Inc.

Author Contact: 5470 Kietzke Lane, Suite 362
Reno, Nevada 89511
phone: (775) 393-3293
fax: (775) 393-3001

Map Notes:

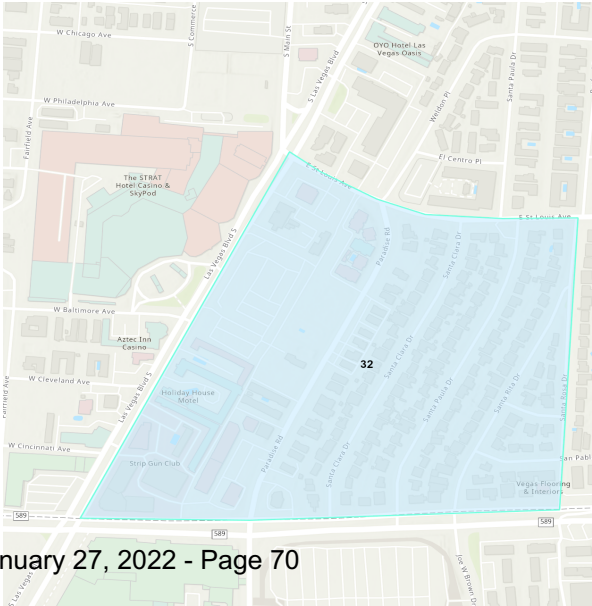

Title: The South Fifth Street, El Centro, and Beverly Green Tracts, Phase I Beverly Green Neighborhood Survey and Inventory. Las Vegas, Clark County, Nevada.

Ward: 3

Project Year: 2011

Project Area: The project area is bounded by East St. Louis Avenue to the south, South Sixth Street on the east, South Las Vegas Boulevard on the west, and East Oakey Boulevard to the north.

Period of Significance: 1950-1963

Description:

In March 2011, KEC contracted with the City to conduct the first phase of a survey and inventory of the Beverly Green Neighborhood, contiguous to the west to the Southridge neighborhood. The 62.89 acre Phase I Beverly Green survey comprises four Beverly Green Tracts, two El Centro Addition Tracts, and a portion of the South Fifth Street Tract containing a total of 192 parcels. The purpose of this survey is to continue the documentation of Las Vegas's post-World War II housing tracts.

Findings:

The Beverly Green Neighborhood Phase I project area, comprises 192 parcels, of which seven are presently vacant (four are parking lots), six are less than 40 years old, and 179 were built between 1950 and 1963. The survey and inventory identified 66 buildings that individually meet the National Register of Historic Places eligibility criteria, 46 that do not, and 67 that, while not individually eligible, would be contributing elements to a potential historic district.

The Clark County Assessor records indicate that the primary buildings in the project area were constructed between 1950 and 1963 in seven subdivisions.

Notes:

HPF Grant #32-10-21935(3)

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 7380

NRIS #: n/a

Federal Agency: HPF

Client: City of Las Vegas

Author: Kautz Environmental Consultants, Inc.

Contact: 1140 Financial Blvd., Suite 100
Reno, Nevada 89502
phone. 775-829-4411

Map Notes:

City of Las Vegas Historic Resource Reports

Title: El Cortez Hotel and Casino National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 3

Date: 10/1/2012 **Project Year:** 2012

Project Area: 600 Fremont Street
Las Vegas, NV 89101

Period of Significance: 1941-1952

Description:
National Register of Historic Places Nomination

Findings:
Significant under criteria A: Commerce and Entertainment

Notes:
It is noted in the nomination that a historic context for the history of casino development has yet to be written. A context of this nature can build a case for the nomination of the El Cortez under criteria C, architecture, as an excellent example of the earliest period of casino architecture in Nevada.

SHPO Report #: n/a

NRIS #: 13000010


Federal Agency: n/a

Client: unknown

Author: Peter Moruzzi

Author Contact: 2935 Angus Street
Los Angeles, CA 90039
213-706-0151
petermoruzzi@gmail.com

Map Notes: Location #34 in map

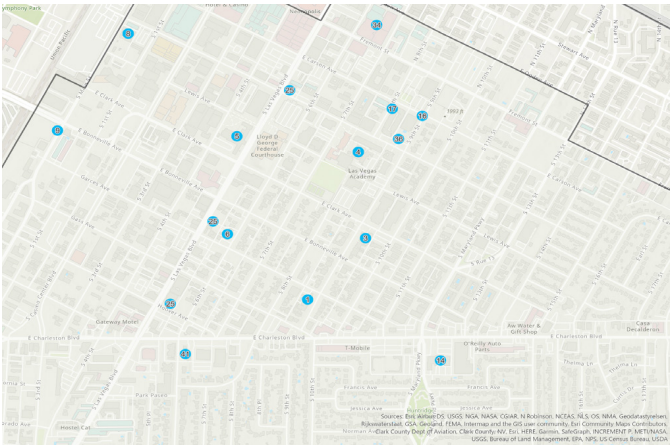

City of Las Vegas Historic Resource Reports

Title: Intensive Level Historic Resource Survey and Inventory of the Phase III Beverly Green Neighborhood: The Paradise Park Tract, Paradise Plaza Tract No. 1, and the Van Patten

Type: Historic Resource Survey **Ward:** 3

Date: 6/28/2013 **Project Year:** 2012

Project Area: The survey area is bounded by East Saint Louis Avenue to the north, East Sahara Avenue to the south, Santa Rosa Drive to the west, and South Sixth Street to the east.

Period of Significance: <1962

Description:

The city is conducting historic property inventories of neighborhoods over 50 years of age as a planning tool to be used by the Department of Planning, the Parks, Recreation and Neighborhood Services Department, and the Historic Preservation Commission. The city of Las Vegas Development Services Center requested that Logan Simpson Design Inc. (LSD) conduct a Historic Resource Survey and inventory of the Phase III portion of the Beverly Green Neighborhood. The neighborhood is comprised of four tracts-the Paradise Park Tract, Paradise Plaza Tract No. 1, and Van Patten Tracts Nos. 1 and 2.

Findings:

The intensive level architectural survey of the Phase III Beverly Green Neighborhood resulted in the identification of 146 buildings of which 143 are residential, two are commercial, and one is a religious building. Of those building surveyed, 17 were individually eligible to the NRHP, 86 were ineligible, 34 were contributing resources, and 2 buildings were undetermined. The historic resource survey also resulted in the expansion of the Paradise Village Historic District.

Notes:

The survey is approximating 10 years old. Plan for a survey update in 2023/2024.

SHPO Report #: 18939


NRIS #: n/a

Federal Agency: HPF

Client: City of Las Vegas Development Services

Author: Logan Simpson Design, Inc.

Author Contact: 5470 Kietzke Lane, Suite 362
Reno, Nevada 89511
phone: (775) 393-3293
fax: (775) 393-3001

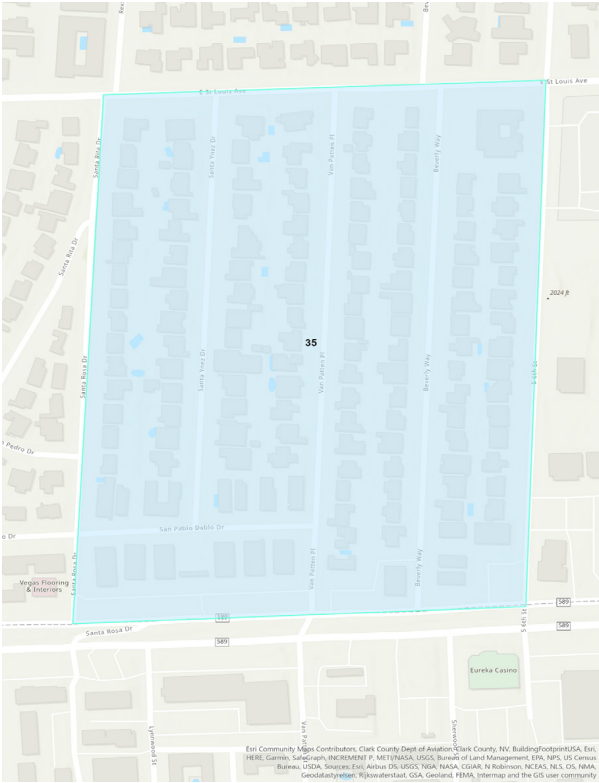

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Morelli House National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 3

Date: 4/9/2012 **Project Year:** 2012

Project Area: 861 East Bridger Avenue
Las Vegas, NV 89101

Period of Significance: 1959 - 1971

Description:
National Register of Historic Places Nomination

Findings:
Significant under criteria A and B: Community Planning and Development, and Leisure and Entertainment

Special Consideration for the Morelli House includes Criterion B, for relocation to avoid demolition and to initiate preservation and rehabilitation as well as Criterion G, for the period of significance reflecting Morelli's career, which indues years that are less than five decades ago.

Notes:
The nomination was written prior to the building reaching the 50 year threshold for nomination. Update the nomination as needed.

SHPO Report #: n/a

NRIS #: 11001086


Federal Agency: n/a

Client: Junior League of Las Vegas

Author: Junior League of Las Vegas

Author Contact: 861 East Bridger Avenue
Las Vegas, NV 89101
INFO@JLLV.ORG
702.822.6536

Map Notes: Location #36 in map

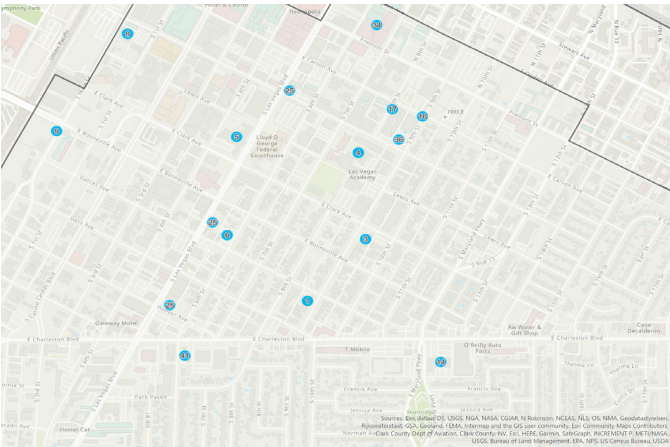

City of Las Vegas Historic Resource Reports

Title: Historic Building Condition Assessment Report and Preservation Plan for the Victory Hotel

Type: Historic Structures Report

Ward: 3

Date: 10/25/2013

Project Year: 2013

Project Area: 307 S. Main Street, Las Vegas, Clark County, Nevada

Period of Significance: 1910

Description:

The Las Vegas Commission for the Centennial and Ward 3 Councilman Bob Coffin are evaluating alternatives to demolition of the historic Victory Hotel building (originally known as the Lincoln Hotel) located at 307 S. Main Street in downtown Las Vegas. The building, which was designed and constructed by local Las Vegas contractors Moore & Rhodes in 1910, is one the oldest buildings in the city and is the last remaining example of a small hotel built in the Mission Revival architectural style to serve miners and workers and patrons of the San Pedro, Los Angeles, and Salt Lake Railroad. As the current owner of the property, Oak Brook Realty and Investments, LLC is planning redevelopment of the site, the city contracted with Logan Simpson Design Inc. (LSD) to conduct a condition assessment of the hotel building and prepare a report that provides a determination of eligibility (DOE) for listing in the National Register of Historic Places (NRHP), as well as an evaluation of significant architectural elements, preservation recommendations, and cost estimates for a number of treatment options for the Victory Hotel.

Findings:

Based on the results of the archival research effort and historic building condition assessment, LSD believes that the Victory Hotel building retains sufficient integrity to be listed in the NRHP at the state level under Criteria A (event) and C (design), and is also eligible for listing on the city of Las Vegas Historic Property Register. The hotel is one of the last extant buildings constructed during Las Vegas' railroad era and it continues to represent this period of early settlement through its modest Mission Revival architectural characteristics, most notably its arched façade, square concrete pillars, and second story porch, as well as its broad overhanging roof eaves and simple boxed cornice.

Notes:

The building was demolished due to fire damage in 2020.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: Logan Simpson Design, Inc.

Author Contact: 5470 Kietzke Lane, Suite 362
Reno, Nevada 89511
phone: (775) 393-3293
fax: (775) 393-3001

Map Notes:

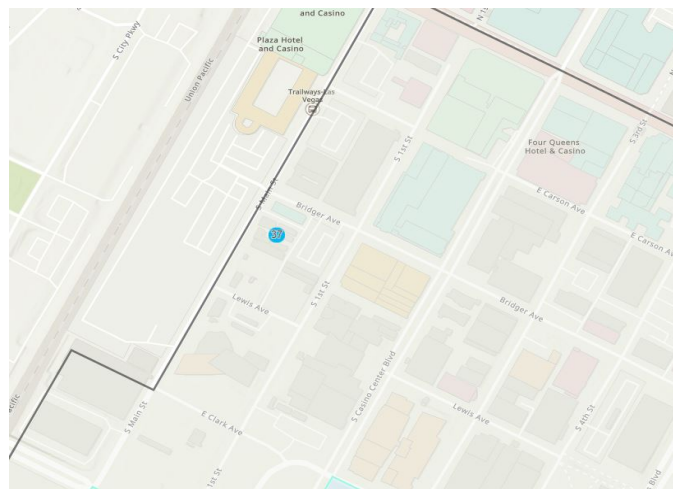

City of Las Vegas Historic Resource Reports

Title: Phase II Huntridge Neighborhood Historic Resource Survey and Inventory

Type: Historic Resource Survey

Ward: 3

Date: 4/1/2014

Project Year: 2014

Project Area: The survey area is known as Huntridge Subdivision - Tract 3 in the City of Las Vegas, Nevada. The area is generally bounded by Francis Avenue and Cottonwood Place on the north, Maryland Parkway on the west, Norman Avenue on the south, and South Fifteenth Street on the east. It also includes Huntridge Circle Park.

Period of Significance: 1943-1944

Description:

The purpose of the survey was to assess NRHP eligible properties in Tract 3 of the Huntridge Subdivision, and if Tract 3 as a whole or portions of it met eligibility criteria for listing as a NRHP historic district.

Findings:

The intensive level architectural survey of Huntridge Subdivision Tract 3 resulted in the identification of 134 single-family residences and a neighborhood park located within one of five tracts built in the Huntridge Subdivision primarily between 1942 and 1944. An examination of previous and current research led to the compilation of a historic context titled, Land Usage: Development of FHA-approved tract housing in Las Vegas during World War II. The period of significance spanned 1943-1944, the war years when most of the tract's houses were built and initially occupied.

Tract 3 of the Huntridge Subdivision as a whole is not eligible to the NRHP due to a loss of historic integrity. However, the survey identified a trio of Tract 3 properties representing each of the tract's three distinct architectural designs that retain sufficient integrity to meet NRHP Criteria A and C.

- 1320 Jessica Avenue - Model A: Cross Hipped
- 1433 Cottonwood Place - Model B: Cross Gabled
- 1425 Francis Avenue - Model C: Cross Hipped with Raised Center Hip

As a result, all three of these properties qualify for individual listing in the NRHP at the local level of significance.

Notes:

Survey is over 10 years old; a survey update is recommended.

SHPO Report #: 19331

NRIS #: n/a


Federal Agency: NPS

Client: City of Las Vegas

Author: ICF International, Inc.

Author Contact: Los Angeles Office:
555 W. Fifth Street Suite 3100
Los Angeles, CA 90013
PHONE
+1.213.312.1800
FAX
+1.213.344.4572

Map Notes:

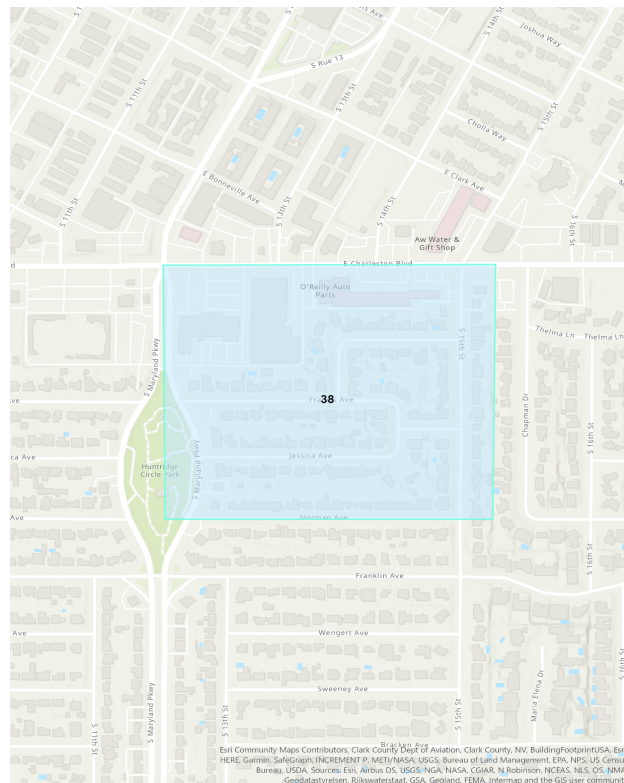

City of Las Vegas Historic Resource Reports

Title: Resource-Specific Architectural Inventory for the Carpenters Union Hall (B14082), Clark County

Type: Inventory **Ward:** 3

Date: 7/27/2015 **Project Year:** 2015

Project Area: 500 N. Lamb Blvd. Las Vegas, NV 89110

Period of Significance: 1965

Description:
Architectural Resource Assessment of the Carpenter's Union Hall Building.

Findings:
The building has local architectural significance under NRHP Criterion C (Design/Construction). The building retains distinctive characteristics of a mid-century commercial building built in the American International and Formalism style popular at the time. This is seen through the minimalist unadorned architecture with a flat roof, lack of ornamentation, slender unadorned columns reaching to a shallow overhang extended from the roof, exterior cladding, and a glass curtain wall on the front facade (facing south).

Notes:
Building has been demolished.

SHPO Report #: 20650

NRIS #: n/a

Federal Agency: City of Las Vegas


Client: City of Las Vegas

Author: Bruning, Stephanie

unknown

Author Contact:

Map Notes:

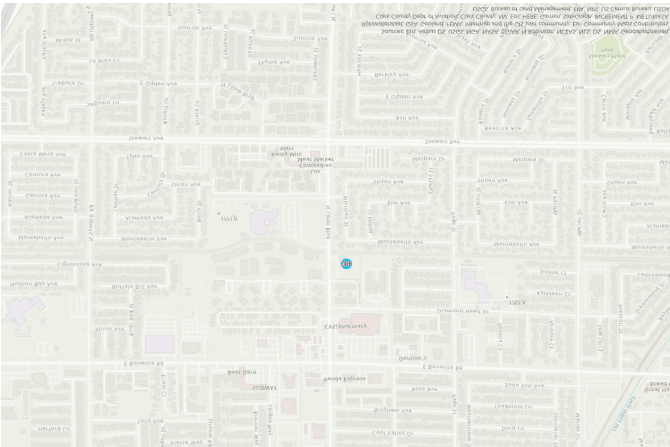

City of Las Vegas Historic Resource Reports

Title: National Register of Historic Places Eligibility Assessment of the W.W.II Era Huntridge Neighborhood, Las Vegas, Clark County, Nevada

Type: Historic Resource Survey **Ward:** 3

Date: 1/18/2017 **Project Year:** 2016

Project Area: The Huntridge Neighborhood, bounded by East Charleston Boulevard to the north, East Oakey Boulevard to the south, South 10th Street to the west, and South 15th Street to the east.

Period of Significance: <1966

Description:

North Wind performed a comprehensive windshield survey and NRHP eligibility assessment of Tract Nos. 1–5 of the Huntridge Neighborhood as part of the city’s ongoing process to document historic neighborhoods located within Las Vegas, Clark County, Nevada. The purpose of the survey was to provide the city Department of Planning with information necessary to determine if a local or NRHP-eligible historic district was located within the neighborhood boundaries, and if so, which properties within the neighborhood should be identified as contributors.

Findings:

The windshield survey of the Huntridge Neighborhood resulted in the identification of 601 buildings, of which 556 are residential and 45 are commercial. Forty-one of the commercial properties were originally single family dwellings in the Huntridge Neighborhood that were subsequently converted for commercial use, and four represent modern infill. Eleven of the 556 residential properties are recommended individually eligible for listing in the NRHP under Criteria C as exception examples of residential W.W.II era housing in Las Vegas. None of the commercial properties are eligible for listing due to their extensive modifications and loss of historic integrity. The windshield survey also resulted in the identification of the newly proposed Huntridge Neighborhood Tract No. 2 Historic District. The district is recommended eligible under Criterion A (event) for its association with the growth of residential subdivisions in Las Vegas during W.W.II and Criterion C (architecture) for its collection of homes constructed during the W.W.II era in the Minimal Traditional and Ranch styles.

Notes:

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: North Wind Resource Consulting

Author Contact: 2025 N. 3rd Street Suite B260
Phoenix, AZ 85004
Phone: (602) 362-8046

Map Notes:

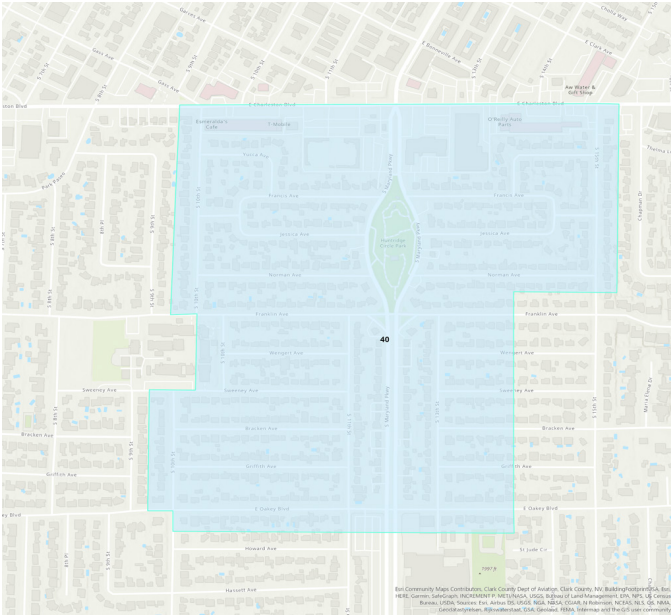

City of Las Vegas Historic Resource Reports

Title: Wengert House City of Las Vegas Historic Register Nomination

Type: Local Register Nomination **Ward:** 3

Date: 2/15/2016 **Project Year:** 2016

Project Area: 600 E. Charleston Blvd.
Las Vegas, NV 89106

Period of Significance: 1938 - 1968

Description:
Application for City of Las Vegas Historic Designation

Findings:
During the period of significance, 1938 - 1968, the Wengert Residence was home to a leading figure in the development of modern Las Vegas. Cyril S. Wengert was an incorporator of NV Energy, namesake for NV Energy's first building downtown as well as an elementary school. He was also integral to the development of many of Las Vegas' civic organizations and the growth of the local Catholic community. It was in this home that Cyril S. Wengert achieved renown and resided until his death, making the Wengert Residence historically significant as a mnemonic for the important contributions he made to the development of Las Vegas.

Notes:
Heidi Swank, Nevada Preservation Foundation, wrote the statement of significance.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: Zac Bagans' The Haunted Museum

Author: Jeff Englehart

Author Contact: 2015 E. Windmill Lane
Las Vegas, NV 89123
702-501-5107
jeff_englehart@hotmail.com

Map Notes: Location #41 in map

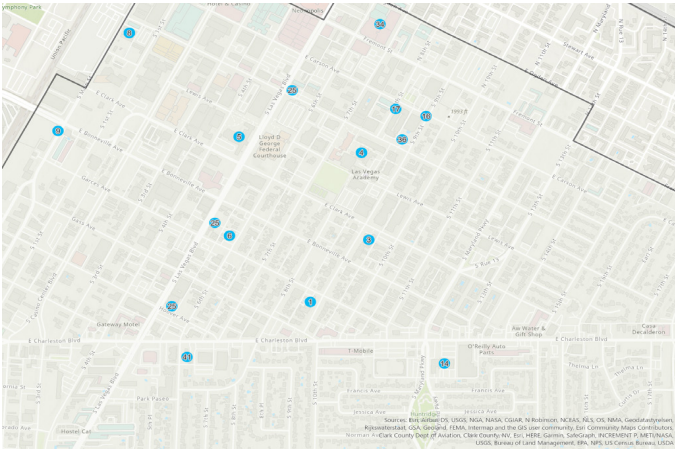

City of Las Vegas Historic Resource Reports

Title: Las Vegas High School Historical Assessment & Feasibility Study

Type: Other

Ward: 3

Date: 9/22/2017

Project Year: 2017

Project Area: 315 S 7th St, Las Vegas, NV 89101. Bounded by S. 7th St. E. Clark Ave. S. 10 St, E. Bridger Ave

Period of Significance: <1967

Description:

This study was prepared for the Las Vegas High School Alumni Association (LVHSAA) to determine the education adequacy of the academic buildings through the preservation and adaptive use of select academic buildings on the historic Las Vegas High School campus which is currently being utilized as the Las Vegas Academy of the Arts.

Findings:

We recommend the preparation of a new or amended National Register of Historic Places nomination and an updated local historic property listing to document the entire historic LVHS campus and clarify the contributing and noncontributing status of the landscape and individual buildings, as follows:

1. Academic Building (historic main building)
2. Gymnasium:
3. Knapp Hall:
4. Frazier Hall
5. Public Schools Administration Building
6. Auditorium
7. Vocational and Industrial Arts Building
8. The remaining buildings on the campus, including the student activities building, Post Hall, Visual Arts, locker building, music rehearsal building, and Lowden Theater.

Notes:

The recommendations in the report provide guidance as to the NRHP eligibility of each of the buildings listed above.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: LAS VEGAS HIGH SCHOOL ALUMNI

Author: Larry Barr, AIA

Author Quinn Evans Architecture
Contact: 2121 Ward Place, NW, 4th Fl
Washington, DC 20037
LBARR@QUINNEVANS.COM
202.591.2506

Map Notes: Location #4 in map

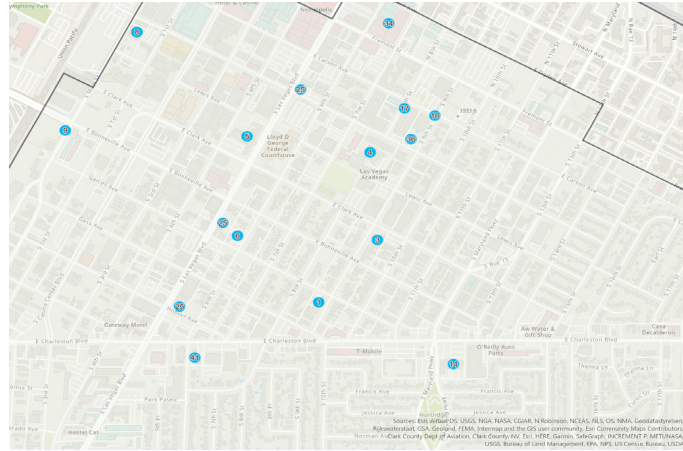

City of Las Vegas Historic Resource Reports

Title: Luxury Living at Moderate Rentals: Historic and Architectural Contexts for the Meadows Village Area, Las Vegas, Clark County

Type: Section 106 Review **Ward:** 3

Date: 4/6/2018 **Project Year:** 2017

Project Area: The study area's boundaries are roughly defined as New York Avenue to the north, Fairfield Avenue and Commerce Street to the east, Cincinnati Avenue to the south, and Tam Drive and Industrial Road to the west.

Period of Significance: 1941-1968

Description:

In February 2017, Praxis Consulting Group, LLC contacted Kautz Environmental Consultants, to conduct an intensive survey of the Baltimore Gardens and Cleveland Gardens apartment complex to determine any adverse effects to the potentially eligible NRHP properties due to the replacement and resizing of window openings, funded in part by HUD Home Funds. As part of the MOA with the City of Las Vegas, the SHPO, and community partners, Kautz conducted a historical and architectural contexts appropriate for each resource and the neighborhood recorded and completed SHPO Architectural Resource Assessment (ARA) forms for the Baltimore Gardens and Cleveland Gardens apartment complexes.

Findings:

The proposed 63.44 acre study area comprises the Meadows Addition, Judy Rich No. 1, and Judy Rich No. 2 subdivisions in Las Vegas. Collectively, this area is known as the Meadows Village. As a whole, the study area suffers from diminished integrity of setting, feeling, design, materials, and workmanship. After years of disinvestment, single-family houses and apartment buildings have fallen into disrepair as a result of continually deferred maintenance. Some buildings are more or less abandoned. Large swaths of land have been cleared for speculative development projects that never arrived, and the landscape largely defined by its negative space. The district's integrity of setting and feeling has been disrupted by the introduction of behemoth development projects to the same degree that it has been affected by wholesale demolition. The Stratosphere Hotel-Casino, Lucky Dragon Casino, Allure Condominiums, and corresponding parking garages are considered intrusions and have diminished the historic setting and feeling of the neighborhood.

Notes:

SHPO Report #: 23661

NRIS #: n/a


Federal Agency: City of Las Vegas

Client: City of Las Vegas, HUD

Author: Kautz Environmental Consultants, Inc.

Author Contact: 1140 Financial Blvd., Suite 100
Reno, Nevada 89502
phone. 775-829-4411

Map Notes:

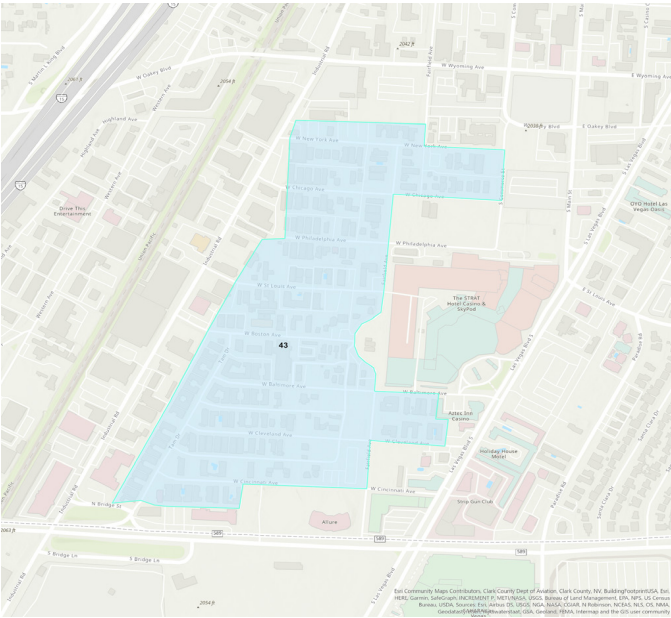

City of Las Vegas Historic Resource Reports

Title: Las Vegas High School Academic Building and Gymnasium (Boundary and Significance Increase, Additional Information, and Name Change to Las Vegas High School Academic

Type: National Register Nomination

Ward: 3

Date: 04/23/2010

Project Year: 2019

Project Area: 315 S. 7th Street. Las Vegas, NV 89101

Period of Significance: 1930-1950

Description:

Amendment to the 1986 Las Vegas High School Academic Building and Gymnasium National Register of Historic Places (NRHP) Registration Form (NRIS #86002293) increases the original boundary from approximately 2.5 acres, including the Academic Building, Gymnasium, and Knapp Hall, to approximately 3 acres by adding Frazier Hall, a classroom building constructed in 1950; extends the end date of the period of significance from 1931 to 1950 to reflect the construction date of Frazier Hall; provides additional historic context information; and recommends a name change to the "Las Vegas High School Academic Building, Gymnasium, and Frazier Hall."

Findings:

Significant under criteria A and C, for education and architecture

Notes:

The report is dated April 23, 2010. However, it was finalized in 2019 by North Wind Resource Consulting. The NRHP Nomination was accepted on July 22, 2021.

SHPO Report #: n/a

NRIS #: pending


Federal Agency: n/a

Client: City of Las Vegas

Author: North Wind Resource Consulting

Author Contact: 2025 N. 3rd Street Suite B260
Phoenix, AZ 85004
courtney.mooney@northwindgrp.com
(702) 858-3885

Map Notes: Location #4 in map

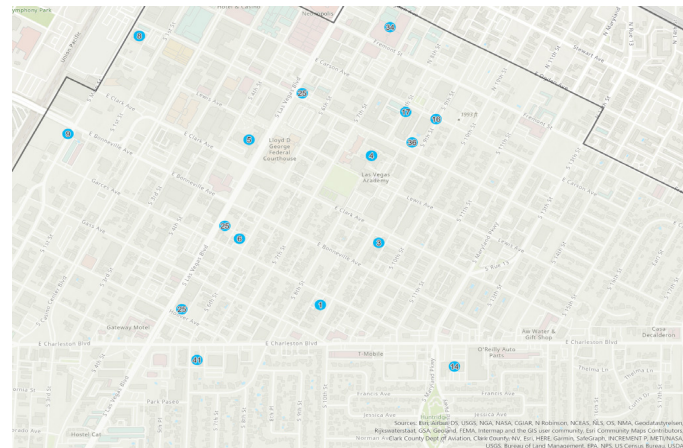

City of Las Vegas Historic Resource Reports

Title: Las Vegas High School NRHP (District Nomination)

Type: National Register Nomination **Ward:** 3

Date: July 2021 **Project Year:** 2021

Project Area: 315 S 7th St, Las Vegas, NV 89101

Period of Significance: 1930-1950

Description:
National Register of Historic Places Nomination

Findings:

Notes:
The survey was recently completed in July 2021 and is currently under review by SHPO. More information will be available after the nomination is reviewed by the National Park Service, tentatively December 2021.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: Kautz Environmental Consultants, Inc.

Author Contact: 1140 Financial Blvd., Suite 100
Reno, Nevada 89502
775-829-4411

Map Notes: Location #4

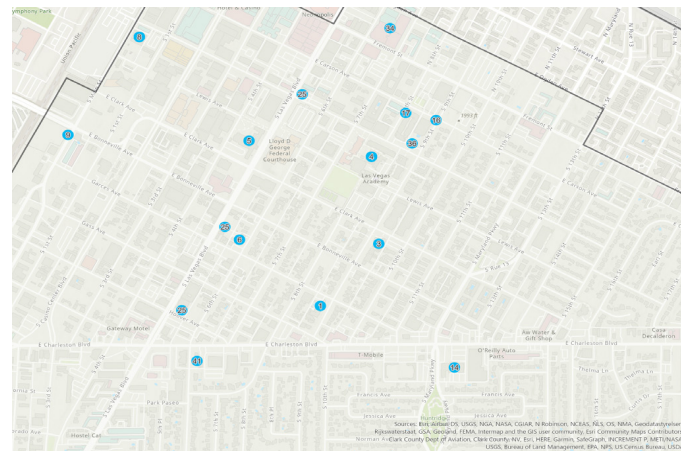

Ward 4

There are no projects/studies located individually in Ward 4. Refer to the section titled “Multiple Wards” on page 171 to review catalog records that have spanning project locations across multiple wards, including Ward 4.

Ward 4 Historic Resource Catalog

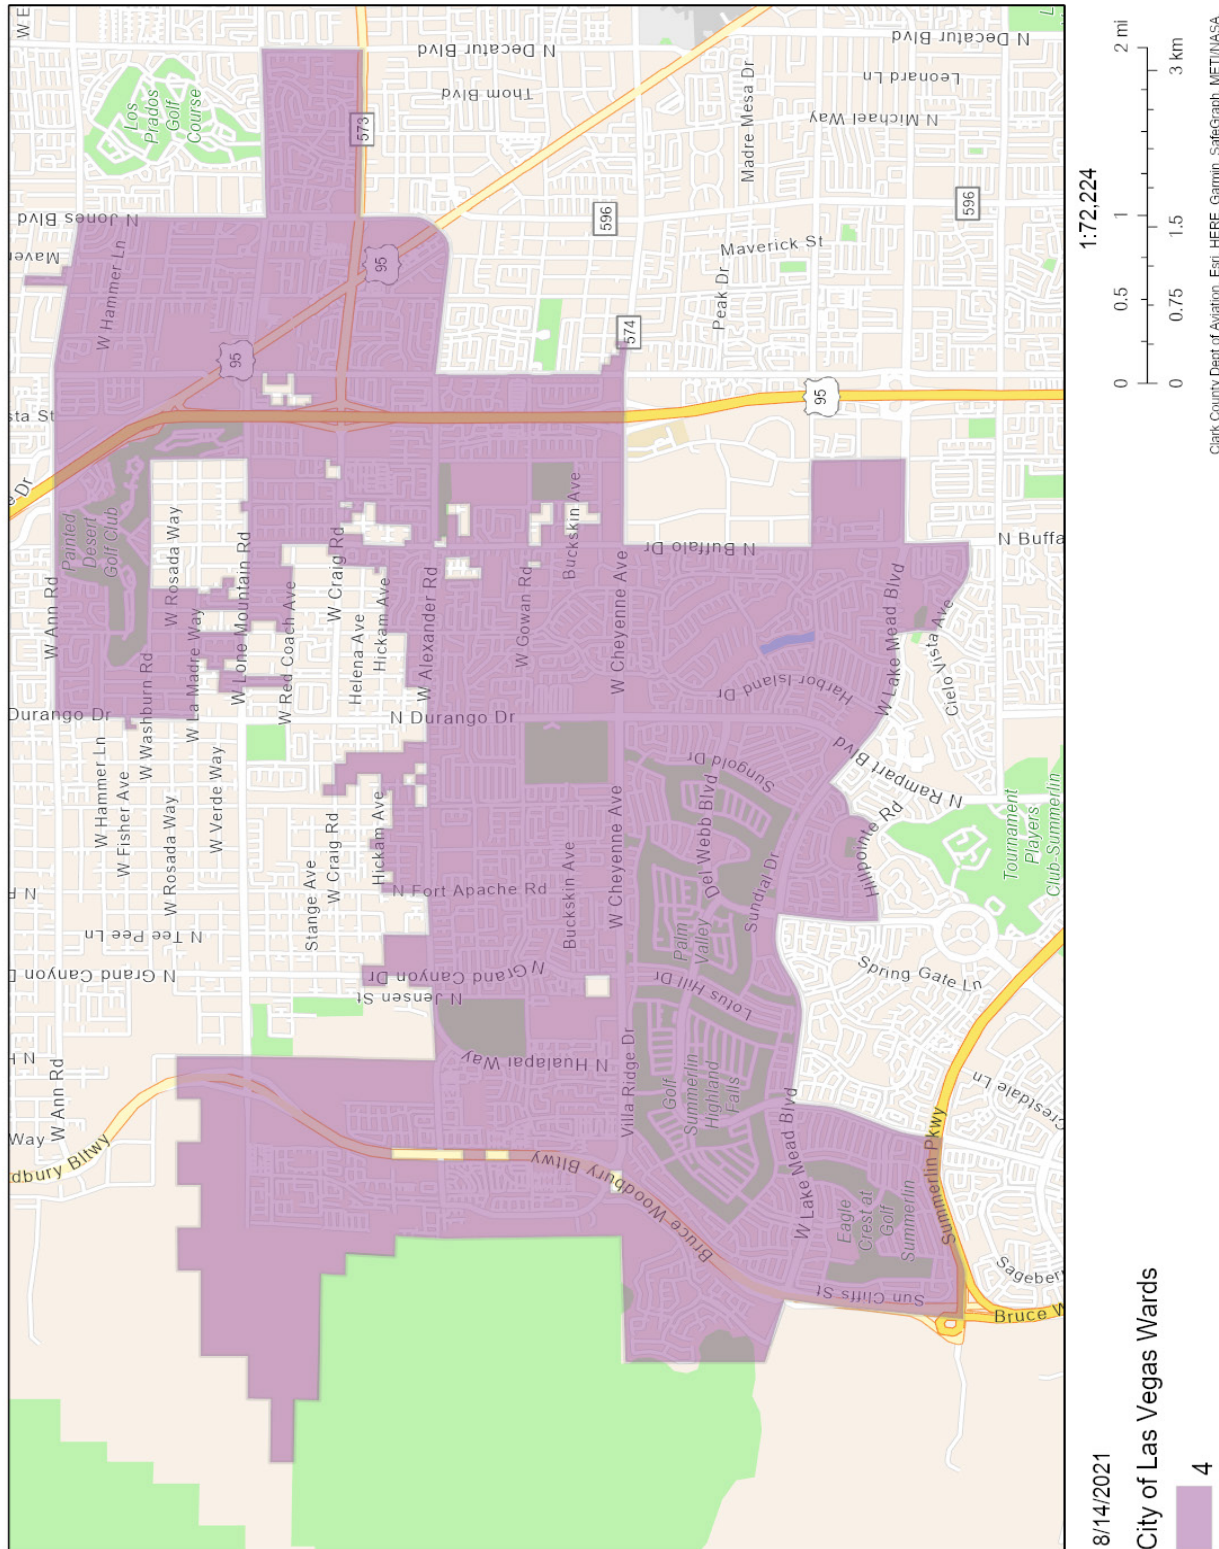


Figure 10: City of Las Vegas Ward 4 Map

Ward 5

The following projects are located within ward 5 of the City of Las Vegas. The map illustrates the boundary of ward 5 in black and the location of each project highlighted in blue. The map number correlates to the numbers listed in the Ward 5 Project table. The individual historic resource records are listed chronologically and alphabetically, and contain a map of each location for better geographic reference.

Ward 5 Historic Resource Catalog

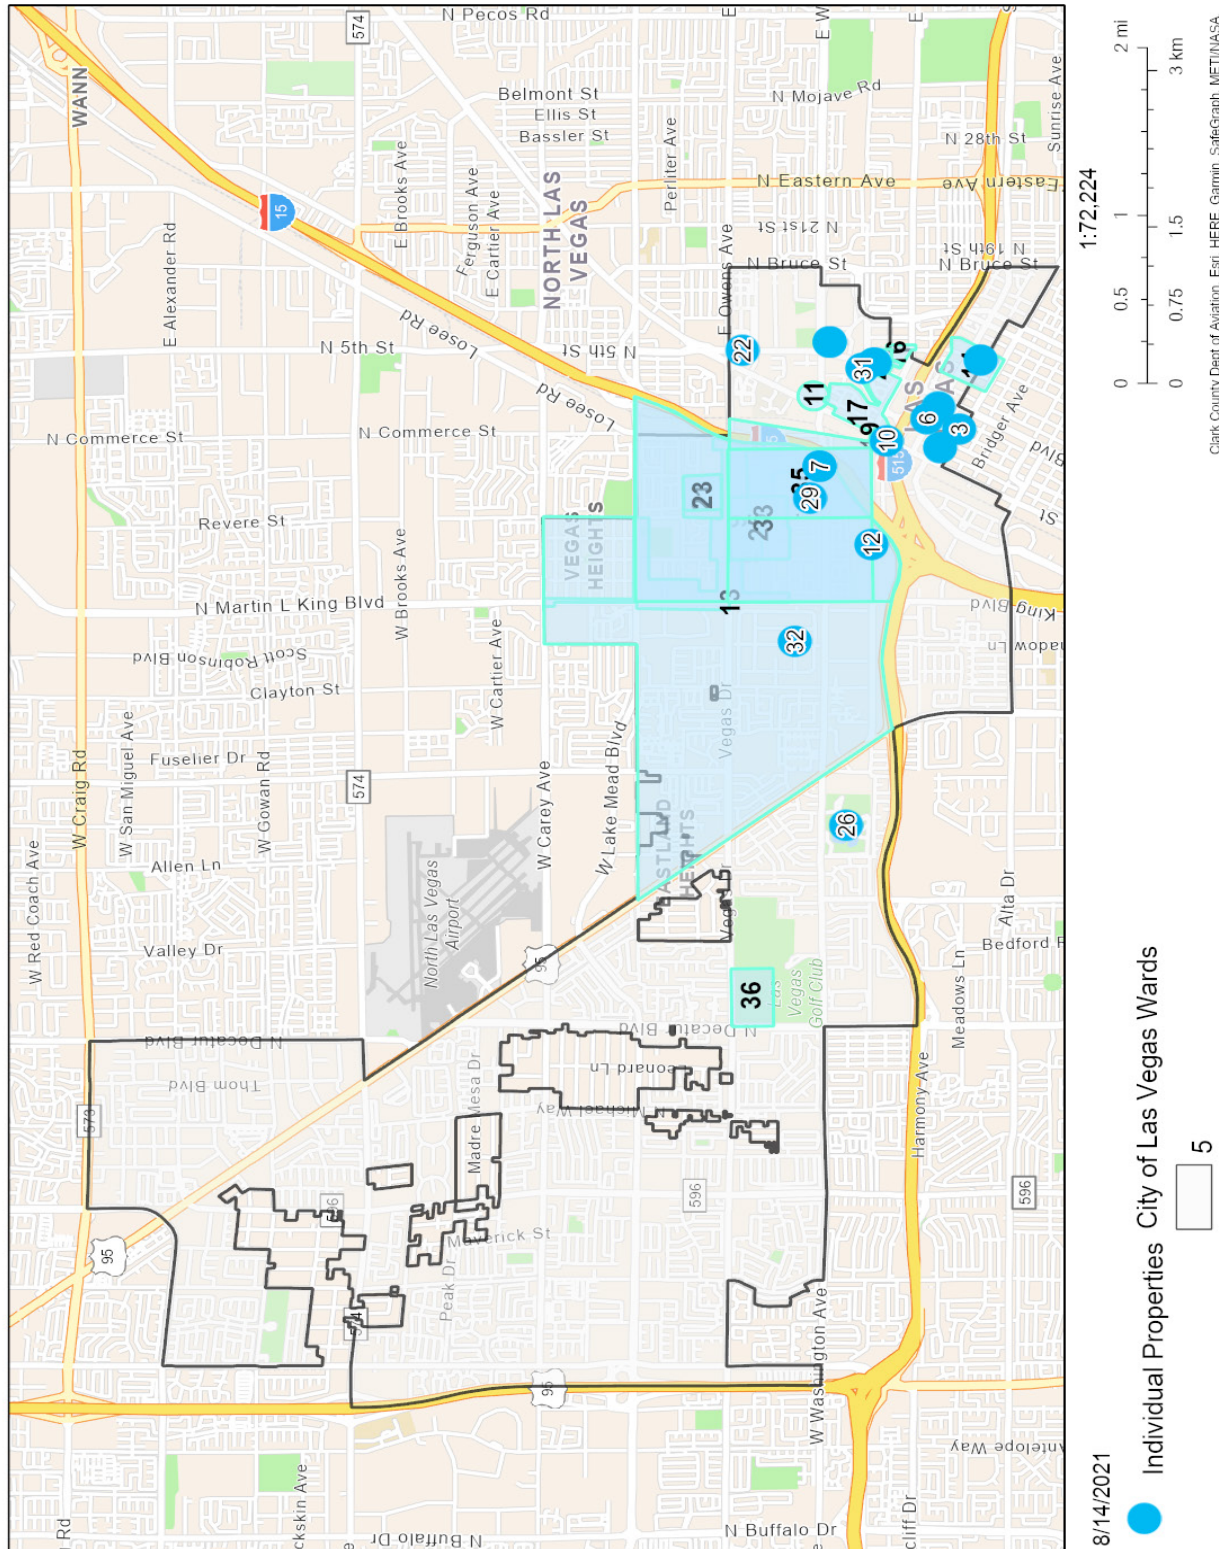


Figure 11: City of Las Vegas Ward 5 Map

Wards 5 Projects

Map #	TITLE	PROJECT AREA	WARD #	PROJECT YEAR
1	MISSING Frank Wait House City of Las Vegas Historic Register Nomination	901 E Ogden Ave. Las Vegas, NV 89101	5	
2	Las Vegas Mormon Fort National Register of Historic Places Nomination	500 E. Washington Ave. Las Vegas, NV 89101	5	1971
3	El Portal Theater Historic Building Survey	310 Fremont St. Las Vegas, NV 89101	5	1976
4	Las Vegas Mormon Fort NRHP Boundary Increase	City of Las Vegas, parcels 1-A, 1-B, and 1-C.	5	1978
2	One Hundred and Twenty-Five Years at Las Vegas' Old Fort: A Historic Structures Report of Las Vegas Fort and Ranch	500 E Washington Ave, Las Vegas, NV 89101	5	1978
6	United States Post Office and Courthouse National Register of Historic Places Nomination	301 E. Stewart Ave. Las Vegas, NV 89101	5	1978
7	Westside School National Register of Historic Places Nomination	330 W. Washington Blvd. Las Vegas, NV 89106	5	1978
9	West Las Vegas Development Analysis and Strategy	Project area is roughly bounded by Martin Luther King Boulevard on the west, and includes corridors of development along Owens Avenue and Lake Mead Boulevard as well as a principally residential area between H Street and the I-15 freeway.	5	1989
10	MISSING Determination of Eligibility for Two Buildings at the Coca Cola Bottling Company of Las Vegas	424 N. Main St. Las Vegas, NV 89101	5	1991 - 1992
11	Architectural Recording of Shop Building E, Las Vegas District Compound, Department of Transportation, Las Vegas, Nevada (Agreement No.: P277-89-013, E.A.: 71629)	Las Vegas District Compound, N. Main St. and Washington Ave.	5	1992
12	Moulin Rouge Hotel National Register of Historic Places Nomination	900 W. Bonanza Road. Las Vegas, NV 89106	5	1992
13	West Las Vegas Plan	The physical limits of the Plan area are: - Rancho Road on the west - Coran Lane/Carey Avenue/Lake Mead Boulevard on the north (City limits) - Interstate 15 on the east - US 95 HWY on the south	5	1994
14	"The Next Close Area", A Reconnaissance Level Survey to Inventory Historic Buildings Around Eighth and Ogden Streets, City of Las Vegas, Campaign Place Development Project	Buks Subdivision, APE roughly bounded by Mesquite Ave, 7th St., Fremont St, and 10th St.	5	1997
15	Binions Casino Historic Resource Inventory Form	100 Fremont St. Las Vegas, NV 89101	5	2001
16	Historic Resource Survey Report - North Ninth Street Elementary School, Las Vegas, Nevada	The APE includes the North Ninth Street School campus and the properties surrounding the school on North Ninth Street, Wilson Avenue and Encanto Drive.	5	2002
17	Biltmore Homes Historic Resource Survey and Inventory, City of Las Vegas - Volume 1 (of 2)	The boundaries for the survey are roughly Washington Avenue and Bonanza Drive on the north and south, and North Main Street and North Ninth Street on the west and east, respectively.	5	2002-2003
17	Biltmore Homes Historic Resource Building Survey and Inventory, City of Las Vegas - Volume 2 (of 2)	Washington Avenue and Bonanza Drive on the north and south, and North Main Street and North Ninth Street on the west and east, respectively.	5	2002-2003
18	FOR NUMERICAL PURPOSE ONLY	N/A	N/A	N/A
19	Clark Avenue Railroad Underpass/Bonanza Road Underpass National Register of Historic Places Nomination	Intersection of Bonanza Road and Union Pacific Railroad Tracks	5	2003
36	Las Vegas Administration Site Disposal Project	8 acres; the parcel is bounded on the South by the Municipal Golf Course, to the West by Decatur Boulevard, the North by Vegas Drive, and the East by private property.	5	2003
20	West Las Vegas Historic Resource Survey and Inventory, City of Las Vegas, September, 2003	The boundaries for the survey are roughly W. Van Buren Avenue and Bonanza Road on the north and south, and H Street and B Street on the west and east, respectively.	5	2003
21	Berkley Square Historic Resource Inventory and Survey	The survey area includes the entire Berkley Square Subdivision as originally platted in 1949 and recorded in 1954. This includes the lots to either side of Byrnes Avenue, Wyatt Avenue, Freeman Avenue and Leonard Avenue between D and H Streets.	5	2005
22	Woodlawn Cemetery National Register of Historic Places Nomination	1500 N. Las Vegas Blvd. Las Vegas, NV 89101	5	2006
23	Berkley Square Historic District National Register of Historic Places Nomination	Area bounded by Byrnes Ave, D St, Leonard Ave and G St	5	2007
24	Neon Boneyard Historic Resources Survey and Inventory Report, Las Vegas, Nevada, Phases I & II	770 N. Las Vegas Blvd, Las Vegas, NV 89101	5	2008
25	Section 106 H & Monroe Senior Apartments Phase II & III, Historic Resources Survey Report	APE is bounded by Ownes Ave and Madison Ave, north and south, and J St. and F St., west and east.	5	2008
26	Lorenzi Park National Register of Historic Places Nomination	3333 W. Washington Ave, Las Vegas, NV 89101	5	2010
27	Determination of Eligibility and Finding of Effect Report for Neon Museum Visitor Center, Las Vegas, Nevada	The Area of Potential Effects (APE) extends one parcel deep in each direction from the ADI: north across McWilliams Drive, east across Encanto Drive, south to Wilson Avenue, and west across North Las Vegas Boulevard, including the Reed Whipple Cultural Center at 821 North Las Vegas Boulevard.	5	2011
7	Historic Westside School and Variety Early Learning Center Master Plan	330 W. Washington Blvd. Las Vegas, NV 89106	5	2011
29	Harrison's Guest House National Register of Historic Places Nomination	1001 F. St. Las Vegas, NV 89106	5	2014
24	La Concha Motel Lobby State Register of Historic Places Nomination	770 N. Las Vegas Blvd. Las Vegas, NV 89101	5	2015

Map #	TITLE	PROJECT AREA	WARD #	PROJECT YEAR
31	Reed Whipple Cultural Center National Register of Historic Places Nomination	821 North Las Vegas Blvd. Las Vegas, NV 89101	5	2016
32	Helen Toland Residence City of Las Vegas Historic Register Nomination	1134 Comstock Dr. Las Vegas, Nevada 89106	5	2018
33	Historic Context Report for the Historic Westside Neighborhood	The survey area is generally bounded by West Lake Mead Boulevard, I-15, US 95, and North Martin Luther King Boulevard on the north, east, south, and west, respectively, in Las Vegas, Clark County, Nevada.	5	2019-2020
34	The African American Civil Rights Experience in Nevada, 1900 - 1979	Historic Westside Neighborhood	5	2019-2020
35	Brief History of Redevelopment Efforts in the Historic Westside Neighborhood	Study area generally bounded by W. Owens Avenue, B Street, W. Bonanza Road, and H Street on the north, east, south, and west, respectively. This boundary contains the McWilliams, Valley View, and H.F.M & M tracts.	5	2020
17	IN PROGRESS Biltmore Bungalows Updated Historic Resource Survey	The survey area is roughly bounded by Washington Avenue and Bonanza Drive on the north and south, and North Main Street and North Ninth Street on the west and east, respectively.	5	2020-2021
#	SAME LOCATION			
#	SAME LOCATION			
#	SAME LOCATION			
#	SAME LOCATION			

City of Las Vegas Historic Resource Reports

Title: Frank Wait House City of Las Vegas Historic Register Nomination

Type: Local Register Nomination **Ward:** 5

Date: **Project Year:**

Project Area: 901 E Ogden Ave
Las Vegas, NV 89101

Period of Significance:

Description:
Application for City of Las Vegas Historic Designation

Findings:

Notes:
Application not available. Refer to the City of Las Vegas Historic Preservation Officer for more information

SHPO Report #:

NRIS #:


Federal Agency:

Client:

Author:

Author Contact:

Map Notes: Location #1 in map

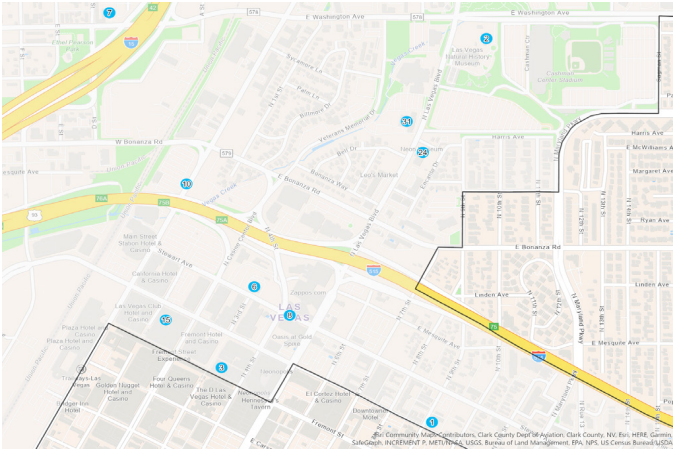

City of Las Vegas Historic Resource Reports

Title: Las Vegas Mormon Fort National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 5

Date: 11/8/1971 **Project Year:** 1971

Project Area: 500 E. Washington Ave.
Las Vegas, NV 89101

Period of Significance: 1855-1858

Description:
National Register of Historic Places Nomination

Findings:
historic significance: Aboriginal (historic) and Architectural.

Notes:
Site address and ownership in application is outdated. Updated application information as needed.

SHPO Report #: n/a

NRIS #: 72000764


Federal Agency: n/a

Client: City of Las Vegas

Author: City of Las Vegas

Author Contact: 495 S. Main St.
Las Vegas, NV 89101

Map Notes: Location #2 in map

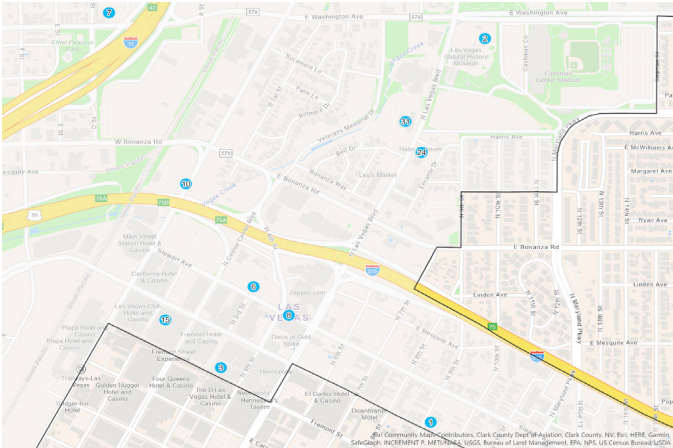

City of Las Vegas Historic Resource Reports

Title: El Portal Theater Historic Building Survey

Type: Historic Resource Survey **Ward:** 5

Date: 5/16/1976 **Project Year:** 1976

Project Area: 310 Fremont St.
Las Vegas, NV 89101

Period of Significance: 1928

Description:

The building survey includes a condition assessment, building history, floor plan sketches, newspaper clippings, archival documentation, and aerial photographs.

Findings:

The survey does not include an assessment of the buildings historic integrity or NRHP eligibility.

Notes:

The building no longer retains its historic function or architectural integrity.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: Dr. Ralph Roske UNLV History #226

Author: Jodi Tenuta (student)

Author Contact: UNLV Special Collection
4505 South Maryland Pkwy.
Box 457010
Las Vegas, Nevada
89154-7010
(702) 895-2234

Map Notes: Location #3 in map

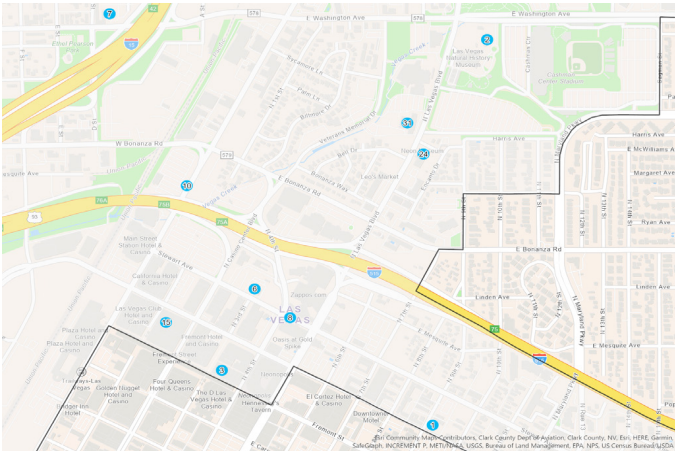

City of Las Vegas Historic Resource Reports

Title: Las Vegas Mormon Fort NRHP Boundary Increase
Type: National Register Nomination **Ward:** 5
Date: 1978 **Project Year:** 1978

Project Area: City of Las Vegas, parcels 1-A, 1-B, and 1-C.

Period of Significance: 1855-1858

Description:

Because of the potential for recovery of historical data related to the fort, the original nomination is being expanded to include additional land surrounding the structure. Total acreage of the additional property (parcels 1-A, 1-B, and 1-C) is .699 acres.

Findings:


n/a

Notes:

References:
Las Vegas Historic Survey, 1978
Nevada State Parks drawing by Stewart, 1971
Historic Structures Report: Las Vegas Mormon Fort
James Hinds, Chief Editor 1978

SHPO Report #: n/a
NRIS #: 78003379
Federal Agency: n/a
Client: City of Las Vegas
Author: City of Las Vegas
Preservation Association of Clark County
Author Contact: 495 S. Main St.
Las Vegas, NV 89101
702-229-6301

Map Notes:

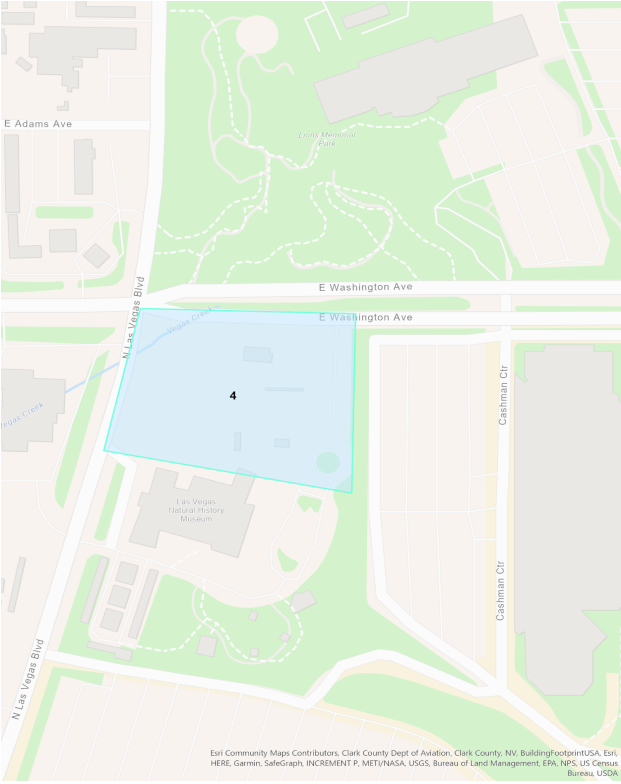

City of Las Vegas Historic Resource Reports

Title: One Hundred and twenty-five Years at Las Vegas' Old Fort: A Historic Structures Report of Las Vegas Fort and Ranch

Type: Historic Structures Report

Ward: 5

Date: 1978

Project Year: 1978

Project Area: 500 E Washington Ave, Las Vegas, NV 89101

Period of Significance: Approx. 1855

Description:

A historic context and architectural history of the Las Vegas Mormon Fort. Includes an identification of adobe types by the University of Arizona, College of Engineering.

Findings:

This historic structures report is by its very nature an interim study. Without a detailed archeological exploration of the site of the Las Vegas Mormon Fort and without a historic architect's careful examination of the surviving building, we lack vital evidence for the history of the Fort. Only by studying every scrap of evidence would we be able to present a complete and integrated history of the buildings of the Las Vegas Fort. Yet, without a preliminary effort to draw attention to the importance of the Fort to the history of Las Vegas it is doubtful if the studies needed for a complete record would ever be made. Hence, we present this study to the world well aware that it is necessarily incomplete. We hope this document will be an important tool for those planning restoration work at the site or developing interpretative programs for the public.

Notes:

The Historic Context is over 40 years old. An update to the historic context is recommended.

SHPO Report #: A_73

NRIS #: n/a


Federal Agency: n/a

Client: unknown

Author: Hinds, James R.

Author Contact: unknown

Map Notes: Location #2 in map

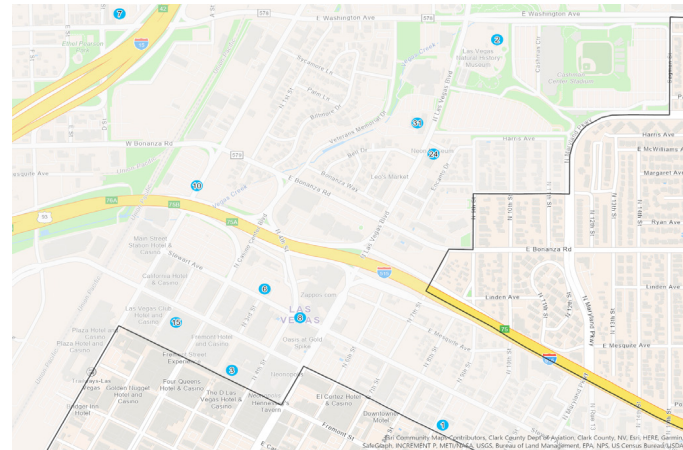

City of Las Vegas Historic Resource Reports

Title: United States Post Office and Courthouse National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 5

Date: 3/7/1982 **Project Year:** 1978

Project Area: 301 E. Stewart Ave. Las Vegas, NV 89101

Period of Significance: 1930-1933

Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria A and C: Architecture and Politics/Government

Notes:
Resource identified in 1978 Historic Preservation Inventory & Planning Guidelines for the City of Las Vegas.

SHPO Report #: n/a

NRIS #: 83001108

Federal Agency: n/a


Client: City of Las Vegas

Author: Clayton B. Fraser, Fraser Design

Author Contact: Contact info on record:
1269 Cleveland Ave Ste 2, Loveland, CO 80537

no current contact information available

Map Notes: Location #6 in map

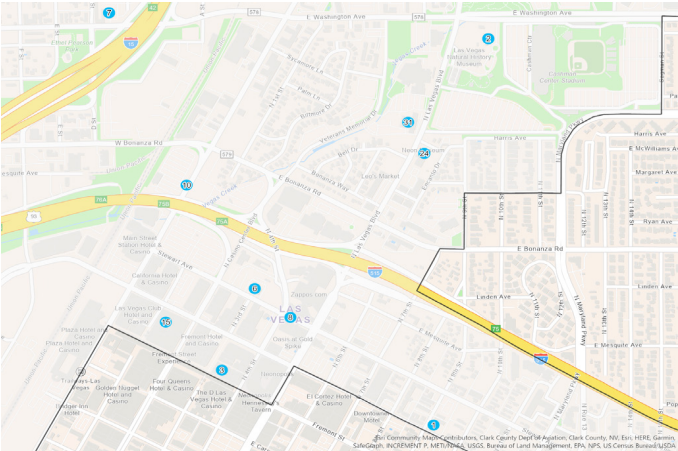

City of Las Vegas Historic Resource Reports

Title: Westside School National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 5

Date: 2/24/1978 **Project Year:** 1978

Project Area: 330 W. Washington Blvd. Las Vegas, NV 89106

Period of Significance: 1922-1928

Description:
National Register of Historic Places Nomination

Findings:
Significant under criteria A, in the area of education

Notes:
Resource identified in the 1978 Historic Preservation Inventory & Planning Guidelines for the City of Las Vegas Surveys.

The school has since been rehabilitated for adaptive reuse. Update the nomination to reflect its current architectural narrative and historic context.

SHPO Report #: n/a

NRIS #: 79001460


Federal Agency: n/a

Client: n/a

Author: Economic Opportunity Board of Clark County

Author Contact: 330 W. Washington Ave.
Suite 101. Las Vegas, NV 89106
702-445-7105
info@eobcapsnv.org

Map Notes: Location #7 in map

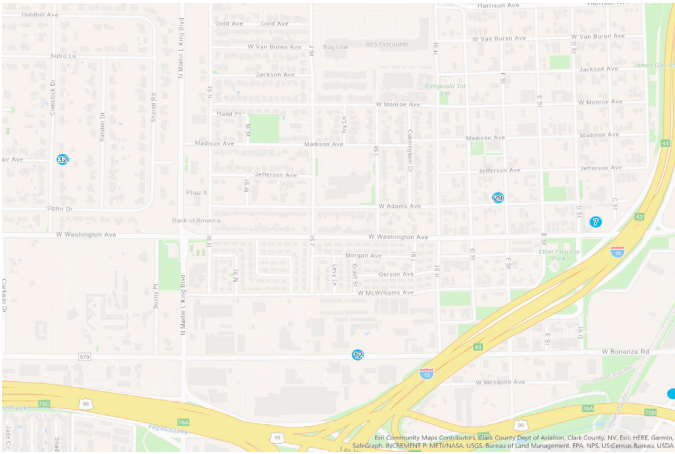

City of Las Vegas Historic Resource Reports

Title: West Las Vegas Development Analysis and Strategy

Type: Other

Ward: 5

Date: 6/7/1989

Project Year: 1989

Project Area: Project area is roughly bounded by Martin Luther King Boulevard on the west, and includes corridors of development along Owens Avenue and Lake Mead Boulevard as well as a principally residential area between H Street and the I-15 freeway.

Period of Significance: n/a

Description:

This report outlines the findings and conclusions of a five-phase study of development and revitalization opportunities in West Las Vegas, an area which was added to the Downtown Las Vegas Redevelopment area in 1988. This study sets forth a land use and development strategy for the revitalization of West Las Vegas which is based on a market analysis of commercial development opportunities, an evaluation of existing land use and transportation patterns, and meetings with Agency staff and community representatives and leaders. The program outlined provides a vehicle for rebuilding the area's commercial core, guiding future land use planning and increasing community involvement in the revitalization effort.

Findings:

n/a

Notes:

Land use and development assessment, not a historic resource report.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a


Client: City of Las Vegas

Author: Laventhol & Horwath/The SWA Group/Barton-Aschman Associates, Inc.

Author Contact: Contact info on record:
3699 Wilshire Blvd.
Los Angeles, CA 90010
(213) 381-5393

no current contact information available

Map Notes:

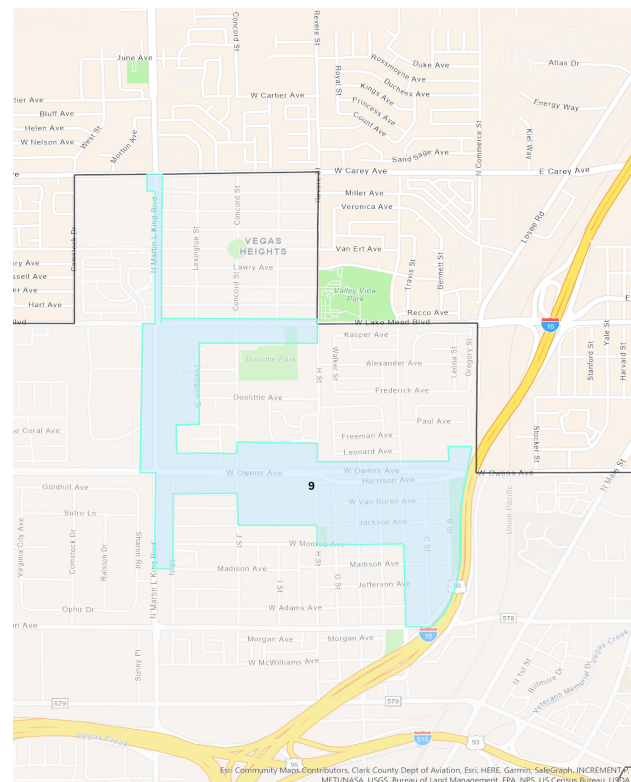

City of Las Vegas Historic Resource Reports

Title: Determination of Eligibility for Two Buildings at the Coca Cola Bottling Company of Las Vegas

Type: Section 106 Review

Ward: 5

Date: **Project Year:** 1991 - 1992

Project Area: 424 N. Main St. Las Vegas, NV 89101

Period of Significance: unknown

Description:

In the summer 1991 and fall of 1992, Knight & Leavitt Associates conducted a preliminary survey to determine the location and character of historic properties within an area of downtown Las Vegas to be impacted by the redesign of the I-15/US-95 interchange.

Findings:

Prior research indicated that a historic structure, the Coca Cola Bottling Office, was recorded at 424 N. Main St. during the preparation of the Historic Preservation Inventory and Planning Guidelines for the City of Las Vegas (Charles Hall Page & Associates, Inc. 1978). The survey by Knight & Leavitt Associates relocated this structure and identified two other potentially significant building, the Coca Cola Warehouse and the "tilt slab" Coca Cola Bottling Plant. The Coca Cola Bottling Office and Warehouse have been determined not eligible due to lack of integrity. Subsequent research indicates that the tilt slab Bottling Plant is not eligible due to its recent age at the time of the survey.

Notes:

Executive Summary only. August 2021, SHPO is attempting to scan the complete report.
Building has been demolished.

SHPO Report #: A_120

NRIS #: n/a


Federal Agency: unknown

Client: unknown

Author: Knight & Leavitt Associates

Author Contact: 4105 Wagon Trail Ave
Las Vegas, NV, 89118-4426
United States
(702) 897-2628
office@klaenv.com

Map Notes: Location #10 in map

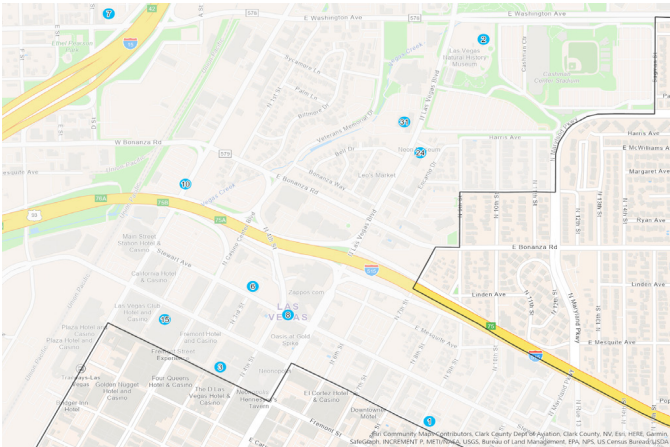

City of Las Vegas Historic Resource Reports

Title: Architectural Recording of Shop Building E, Las Vegas District Compound, Department of Transportation, Las Vegas, Nevada (Agreement No.: P277-89-013, E.A.: 71629)

Type: Inventory **Ward:** 5

Date: 9/1/1992 **Project Year:** 1992

Project Area: Las Vegas District Compound, N. Main St. and Washington Ave.

Period of Significance: unknown

Description:

Architectural documentation of Shop Building E located in the Las Vegas District Compound, at N. Main St. and Washington Ave. Documentation includes a physical description of the building, photographs, maps, and shop drawings.

Findings:

n/a

Notes:

Documents not scanned: drawings/renderings, and correspondence. Reach out to SHPO for more information.

Project is over 20 years old; an updates study is recommended

SHPO Report #: A_83

NRIS #: n/a

Federal Agency: n/a


Client: NDOT

Author: Rainshadow Associates

Author Contact: Information on record:
755 Forest St. Suite 300
Reno, NV 89509
(702) 322-9542

No current contact information available

Map Notes:

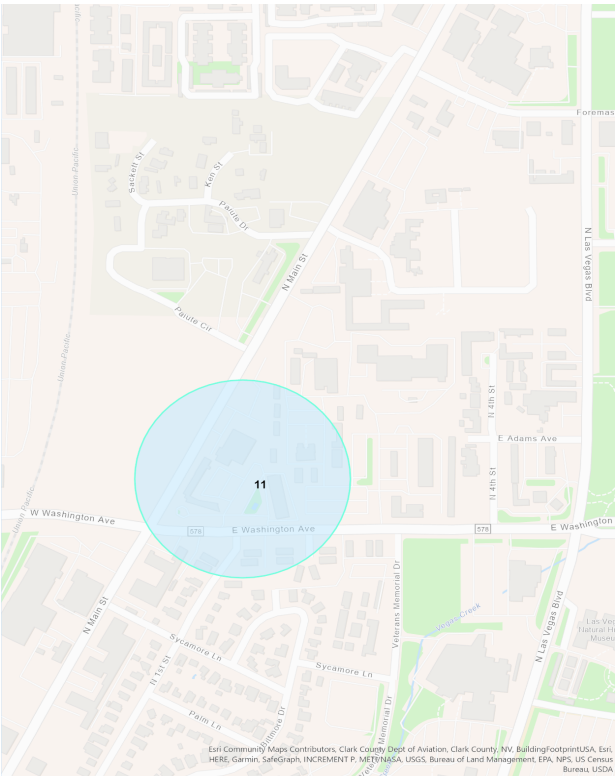

City of Las Vegas Historic Resource Reports

Title: Moulin Rouge Hotel National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 5

Date: 8/25/1992 **Project Year:** 1992

Project Area: 900 W. Bonanza Road
Las Vegas, NV 89106

Period of Significance: 1955-1960

Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria A: Ethnic Heritage/Black history
One contributing buildings, two noncontributing buildings

Notes:
The building has been demolished. Update the NRHP nomination as needed.

SHPO Report #: n/a

NRIS #: 92001701


Federal Agency: n/a

Client: n/a

Author: Frank Wright, Nevada State Museum, Las Vegas and Michelle McFadden, Division of Historic Preservation and Archaeology

Author Contact: 309 S Valley View Blvd., Las Vegas, NV 89107
Contact info on record:
123 W. Nye Lane
Carson City, NV 89701

Map Notes: Location #12 in map

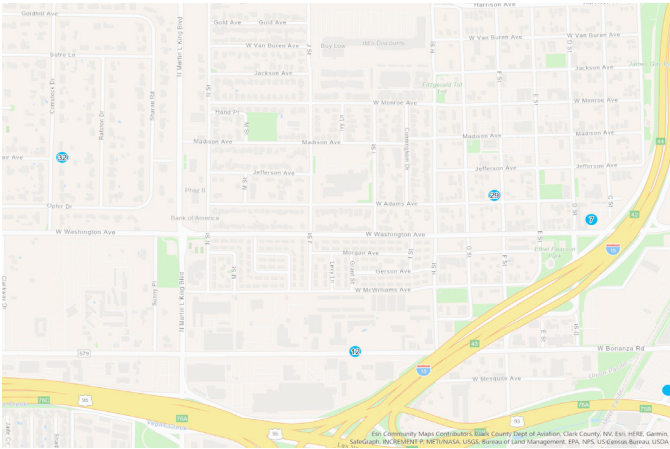

City of Las Vegas Historic Resource Reports

Title: West Las Vegas Plan

Type: Planning/Redevelopment Study

Ward: 5

Date: 03/02/1994

Project Year: 1994

Project The physical limits of the Plan area are:

Area:

- Rancho Rood on the west
- Coran Lane/Carey Avenue/Lake Mead Boulevard on the north (City limits)
- Interstate 15 on the east
- US 95 HWY on the south

Period of Significance: 1900-1970's

Description:

The West Las Vegas Plan is the prototype for a series of neighborhood scale comprehensive plans to be developed in conformance with, but in more detail than, the City of Las Vegas General Plan. The 3.5 square mile West Las Vegas community is centrally located in the City, immediately north and west of the Downtown core area. The Plan was developed by staff with the continuing input and support of the West Las Vegas Neighborhood Advisory Board which was appointed by Councilman Frank Hawkins Jr. in April 1992, in a concerted effort to plan with rather than for the neighborhood residents.

Findings:

n/a

Notes:

Not a historic resource report

Historic Residential and Commercial Districts are identified in the plan.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: City of Las Vegas Community Planning Division

Author 495 S. Main St.
Contact: Las Vegas, NV 89101

Map Notes:

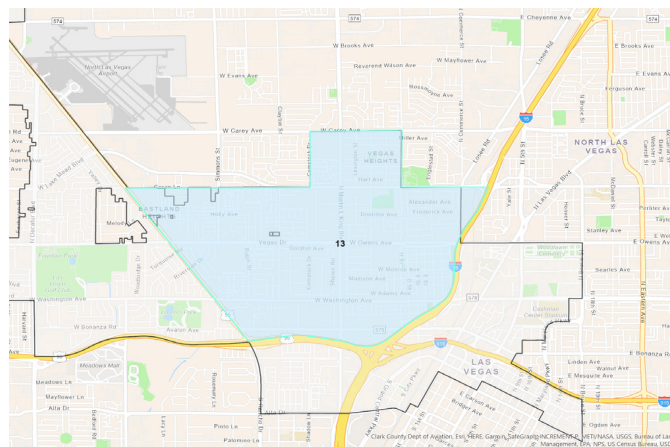

City of Las Vegas Historic Resource Reports

Title: "The Next Close Area", A Reconnaissance Level Survey to Inventory Historic Buildings Around Eighth and Ogden Streets, City of Las Vegas, Campaign Place Development Project

Type: Section 106 Review

Ward: 5

Date: 07/1997

Project Year: 1997

Project Area: Bucks subdivision, APE roughly bounded by Mesquite Ave, 7th St., Fremont St., and 10th St.

Period of Significance: <1957

Description:

A Reconnaissance Level Survey was conducted to document any potential historic buildings around Eighth and Ogden Streets, in the City of Las Vegas, as part of the planning for the Campaign Place development project. The proposed Campaign Place project is a 320-unit Single Room Occupancy (SRO) development designed for low income households. Although approved by the City of Las Vegas, this undertaking must comply with the National Historic Preservation Act in order to qualify for a Federal assisted HUD loan.

Findings:

The survey identified 61 properties with still surviving buildings constructed in or before 1957. Historic Properties Inventory Forms were prepared for each property. Most of the approximately 120 properties in the study area were developed before 1957. Many once developed properties have been subsequently cleared and redeveloped, and some lots simply have been cleared of old dwellings and now await new economic utilization. Most surviving early buildings have been subjected to various alterations and modifications. This continuing dynamic quality is a characteristic of the area and a key to an appreciation of it as "the next close area." With this continually dynamic nature, properties in the study area generally lack the quality of historic integrity of setting and design required for National Register landmarks.

It is recommended that the properties documented in this report do not warrant further consideration under the regulations of the National Register of Historic Places, in regards to the planning for Campaign Place.

Notes:

Project is over 20 years old; an updated study is recommended.

SHPO Report #: 7107

NRIS #: n/a


Federal Agency: n/a

Client: The Tom Hom Group

Author: Paul G. Chace & Associates

Author Contact: 1823 Kenora Drive
Escondido, CA 90207
(760) 743-8609

Map Notes:

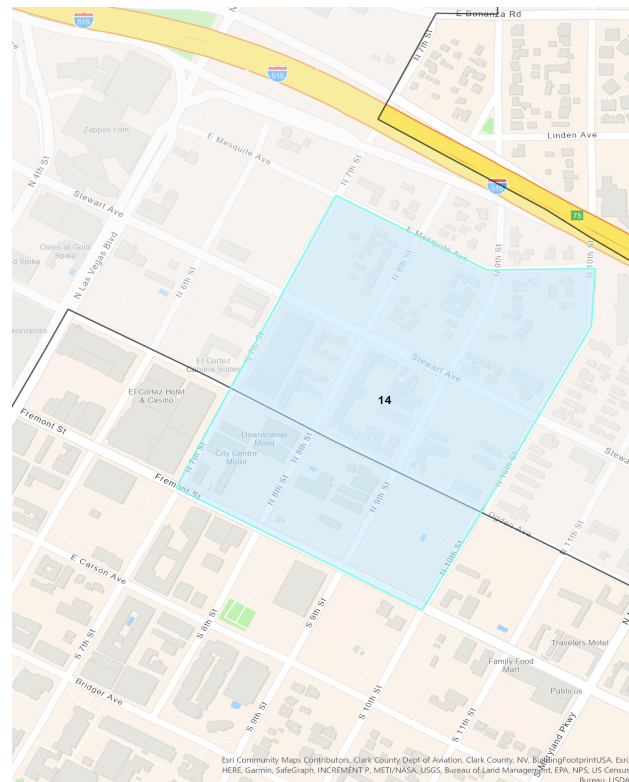

City of Las Vegas Historic Resource Reports

Title: Binion Casino Historic Resource Inventory Form

Type: Inventory

Ward: 5

Date: 12/28/2001

Project Year: 2001

Project Area: 100 Fremont St. Las Vegas, NV 89101

Period of Significance: 1958

Description:

Historic Resource Inventory Form for Binion's Casino. No formal report included.

Findings:

This building has been so significantly altered that no trace of the original buildings on the site remain. The architectural style is consistent with twentieth-century casinos. As it pertains to NRHP criteria A, B, and C, the following recommendation can be made on this property based on archival research.

1. While this property is broadly associated with events that contributed to the history of the area, its current condition does not represent the characteristics that were in place during the contributory period.
2. This property is not connected with any person significant to the history of the area.
3. This structure does not possess distinctive characteristics of any type, period, or method of construction. It does not represent the work of a master architect or possess any high artistic value, nor does it represent any significant or distinguishable entity with components that lack individual distinction.

Notes:

Part of The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County. SHPO report no. A_734

Inventory is over 20 years old; an updated inventory is recommended

SHPO Report #: S736_31

NRIS #: n/a


Federal Agency: n/a

Client: unknown

Author: Knight & Leavitt Associates, Inc.

Author Contact: 4105 Wagon Trail Ave
Las Vegas, NV, 89118-4426
United States
(702) 897-2628
office@klaenv.com

Map Notes: Location #15 in map

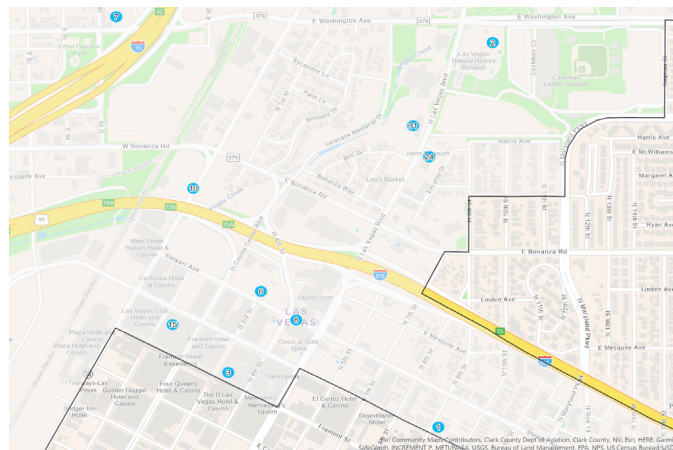

City of Las Vegas Historic Resource Reports

Title: Historic Resource Survey Report - North Ninth Street Elementary School, Las Vegas, Nevada

Type: Section 106 Review

Ward: 5

Date: 7/1/2002

Project Year: 2002

Project Area: The APE includes the North Ninth Street School campus and the properties surrounding the school on North Ninth Street, Wilson Avenue and Encanto Drive.

Period of Significance: <1952

Description:

A historic resource survey of the North Ninth Street School campus. This survey was completed to formally inventory and evaluate the existing properties to determine eligibility of nomination to the National Register of Historic Places. The school is threatened by demolition for a Las Vegas Metro Police substation building. The City of Las Vegas conducted a survey of the APE in compliance with Section 106. A historical information was compiled and drafted to provide historic context for the North Ninth Street School and the Biltmore Homes which border the school on the west and north.

Findings:

It was determined that Building 1 of the North Ninth Street School is eligible for nomination under Criterion A and C of the National Register of Historic Places. Buildings 2 and 3 have been determined eligible for nomination under Criterion A. None of the residential properties included within the boundaries of the APE are individually eligible for nomination to the National Register of Historic Places.

Notes:

Documents not scanned: Parts of document and correspondence. Reach out to SHPO for more information.

HRIF's are available.

Survey is 20 years old; a survey update is recommended.

SHPO Report #: A_755

NRIS #: n/a


Federal Agency: NV SHPO

Client: City of Las Vegas

Author: Mooney, Courtney (20th Century Preservation)

Author Contact: 1608 Houssels Ave.
Las Vegas, NV 89104
(702) 858-3885

Map Notes:

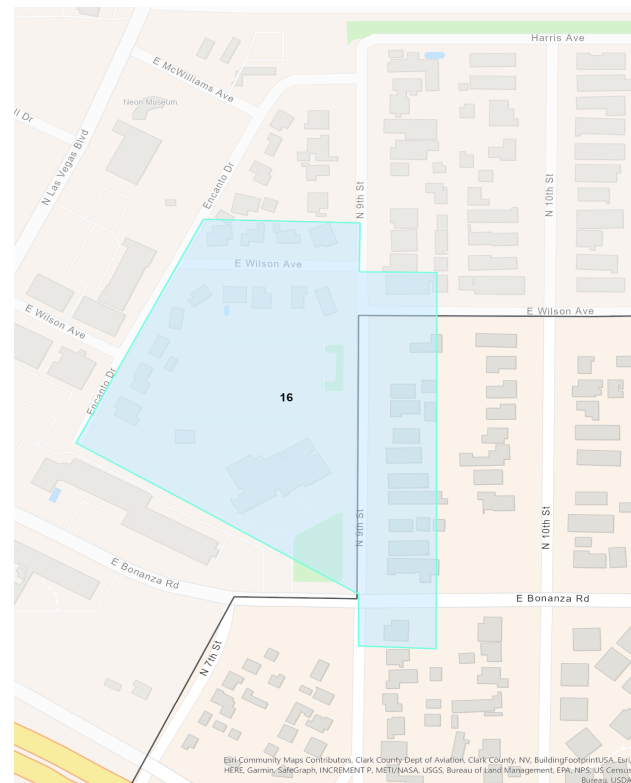

City of Las Vegas Historic Resource Reports

Title: Biltmore Homes Historic Resource Survey and Inventory, City of Las Vegas - Volume 1 (of 2)

Type: Historic Resource Survey

Ward: 5

Date: 3/1/2003

Project Year: 2002-2003

Project Area: The boundaries for the survey are roughly Washington Avenue and Bonanza Drive on the north and south, and North Main Street and North Ninth Street on the west and east, respectively.

Period of Significance: 1941-1946

Description:

20th Century Preservation, under the employ of the City of Las Vegas Planning and Development Department, conducted a historic resource survey of the Biltmore Homes neighborhood, located in Downtown North Las Vegas, to formally inventory and document the existing historic properties. The results of this Reconnaissance Level survey will be used as a preservation planning tool during future revitalization and development efforts for this historically rich area.

Findings:

As a result of this survey, 20th Century Preservation has determined that the Biltmore Homes, specifically the first three phases, contain great historic value as representatives of World War II and post World War II "defense city" housing development in the city of Las Vegas, and should be considered for a more in-depth study for possible inclusion into the National Register of Historic Places, as well as a City of Las Vegas historic district.

The final phase of the Biltmore Homes, the Biltmore Addition Annex #3, was not included in the above statement due to a loss of historic integrity and geographic disparity from the Biltmore Subdivision due to redevelopment in the downtown area.

Notes:

An update to the 2003 Biltmore survey is currently underway by the Nevada Preservation Foundation. It is slated for completion in the fall of 2021.

SHPO Report #: A_732

NRIS #: n/a

Federal Agency: HPF

Client: City of Las Vegas

Author: Mooney, Courtney (20th Century Preservation)

Author Contact: 1608 Houssels Ave.
Las Vegas, NV 89104
(702) 858-3885

Map Notes:



City of Las Vegas Historic Resource Reports

Title: Biltmore Homes Historic Resource Survey and Inventory, City of Las Vegas - Volume 2 (of 2)

Type: Historic Resource Survey **Ward:** 5

Date: 3/1/2003 **Project Year:** 2002-2003

Project Area: The boundaries for the survey are roughly Washington Avenue and Bonanza Drive on the north and south, and North Main Street and North Ninth Street on the west and east, respectively.

Period of Significance: 1941-1946

Description:

20th Century Preservation, under the employ of the City of Las Vegas Planning and Development Department, conducted a historic resource survey of the Biltmore Homes neighborhood, located in Downtown North Las Vegas, to formally inventory and document the existing historic properties. The results of this Reconnaissance Level survey will be used as a preservation planning tool during future revitalization and development efforts for this historically rich area.

Findings:

As a result of this survey, 20th Century Preservation has determined that the Biltmore Homes, specifically the first three phases, contain great historic value as representatives of World War II and post World War II "defense city" housing development in the city of Las Vegas, and should be considered for a more in-depth study for possible inclusion into the National Register of Historic Places, as well as a City of Las Vegas historic district.

The final phase of the Biltmore Homes, the Biltmore Addition Annex #3, was not included in the above statement due to a loss of historic integrity and geographic disparity from the Biltmore Subdivision due to redevelopment in the downtown area.

Notes:

Volume 2 of the report includes the photo log.

SHPO Report #: A_733

NRIS #: n/a

Federal Agency: HPF

Client: City of Las Vegas

Author: Mooney, Courtney (20th Century Preservation)

Author Contact: 1608 Houssels Ave.
Las Vegas, NV 89104
(702) 858-3885

Map Notes:



City of Las Vegas Historic Resource Reports

Title: Clark Avenue Railroad Underpass/Bonanza Road Underpass National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 5

Date: 9/23/2003 **Project Year:** 2003

Project Area: Intersection of Bonanza Road and Union Pacific Railroad Tracks

Period of Significance: 1936-1954

Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria A: Community Planning and Development, Transportation, Social History, Ethnic Black Heritage

Notes:
Nomination is over 20 years old; an updated inventory is recommended.

SHPO Report #: n/a
NRIS #: 3001509
Federal Agency: n/a
Client: n/a
Author: City of Las Vegas
Author Contact: 495 S. Main St.
Las Vegas, NV 89101
Map Notes: Planning Department



City of Las Vegas Historic Resource Reports

Title: Las Vegas Administration Site Disposal Project

Type: Section 106 Review

Ward: 5

Date: 11/13/2003

Project Year: 2003

Project Area: 8 acres; the parcel is bounded on the South by the Municipal Golf Course, to the West by Decatur Boulevard, the North by Vegas Drive, and the East by private property.

Period of Significance: <1953

Description:

The Desert National Wildlife Refuge (NWR) is planning to dispose of about 8 acres of land within the city limits of Las Vegas. The property was the former Administration site for the Desert NWR and the Bureau of Land Management. The parcel is on the southeast corner of Decatur Boulevard and Vegas Drive. The objective of the survey is to identify and evaluate historic properties within the project's APE in compliance with Section 106 of the National Historic Preservation Act of 1966, as amended (36 CFR 800.4). And, if historic properties are present to assess project effects (36 CFR 800.5).

Findings:

There are a total of 12 buildings/structures on the Las Vegas Administration Site, only two of which are more than 50 years old. The residence and office/garage were built in 1940-1942; all of the other structures were added less than 50 years ago, including two parking shelters; one trailer used as an office; five modular offices; one metal pole building; and one office building. The Las Vegas Administration Site house (Building # 1) appears to meet criteria A and C for eligibility established by the National Register of Historic Places as a house style that is representative of the Federal Government's response to the Great Depression and because of its intact cottage elements and rustic detailing that is unique in Las Vegas. The house reflects the legacy of construction that accompanied the nation's struggle to overcome the Depression through federally sponsored projects.

Notes:

Project is near 20 years old; an updated study is recommended.

SHPO Report #: 5390


NRIS #: n/a

Federal Agency: BLM

Client: n/a

Author: Speulda, Lou Ann

Author Contact: U.S. Fish and Wildlife Service
Southern Nevada Fish & Wildlife Office
4701 North Torrey Pines Drive
Las Vegas, Nevada 89130
(702) 515-5230

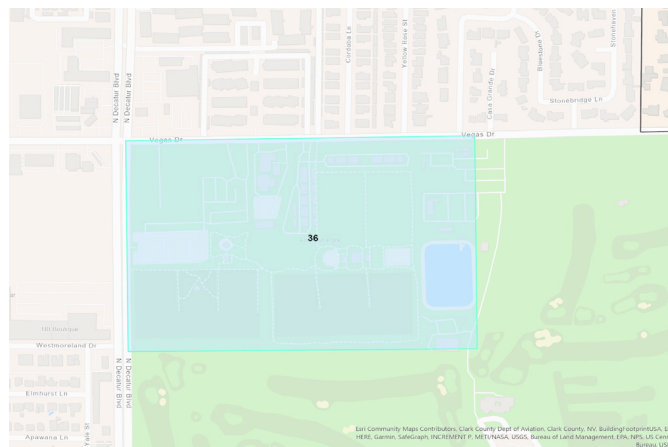

Map Notes:

City of Las Vegas Historic Resource Reports

Title: West Las Vegas Historic Resource Survey and Inventory, City of Las Vegas, September, 2003

Type: Historic Resource Survey

Ward: 5

Date: 9/1/2003

Project Year: 2003

Project Area: The boundaries for the survey are roughly W. Van Buren Avenue and Bonanza Road on the north and south, and H Street and B Street on the west and east, respectively.

Period of Significance: Approx. 1905-1950

Description:

20th Century Preservation, under the employ of the City of Las Vegas Planning and Development Department, conducted a historic resource survey of the historic West Las Vegas, located northwest of Downtown Las Vegas, to formally inventory and document the existing historic properties. The results of this intensive survey will be used as a preservation planning tool during future revitalization and development efforts for this historically rich area.

Findings:

As a result of this survey, 20th Century Preservation has determined that the West Las Vegas properties included within the survey boundaries contain socially historic value as representing the development of Las Vegas' first town site. The houses, schools and churches that make up this community reflect several significant local and national events and architectural styles. The majority of the properties included in the survey are not individually eligible for nomination to the National Register of Historic Places, mostly due to significant alterations. Nor would a National Register or a locally designated historic district be feasible due to the incongruity of the historic resources; however, some of the properties such as religious properties and community meeting houses, social clubs, and some individual residences should be researched further and considered for multiple property nominations. Those individual properties have been noted as potentially eligible on the Historic Resource Inventory Forms for that property. In addition, it is recommended that a more in-depth survey be completed of the McWilliams town site area to document all of the accessory buildings that share lots with the primary buildings, including those without addresses.

Potentially Eligible Resources (pg. 13):

13 Religious Properties/Social Clubs

3 Residences

2 Misc. Structures

7 Structures Suggested for further study

Notes:

HPF #32-02-17558(4)

Survey is almost 20 years old; a survey update is recommended.

SHPO Comments/Notes: Data for the quantity of properties considered under the 'Reconnaissance' category were taken from the Clark County Assessor's Website aerial photo dated 9/5/2005 for the survey area. Several of the lots in this area were either vacant, or have buildings that were not yet 50 years of age at the time the survey was completed in September 2003. Also, some have been demolished since 2003. HRIFs were not completed for these properties.

Period of Significance not specified.

SHPO Report #: A_731

NRIS #: n/a


Federal Agency: HPF

Client: City of Las Vegas

Author: Mooney, Courtney (20th Century Preservation)

Author Contact: 1608 Houssels Ave.
Las Vegas, NV 89104
(702) 858-3885

Map Notes:

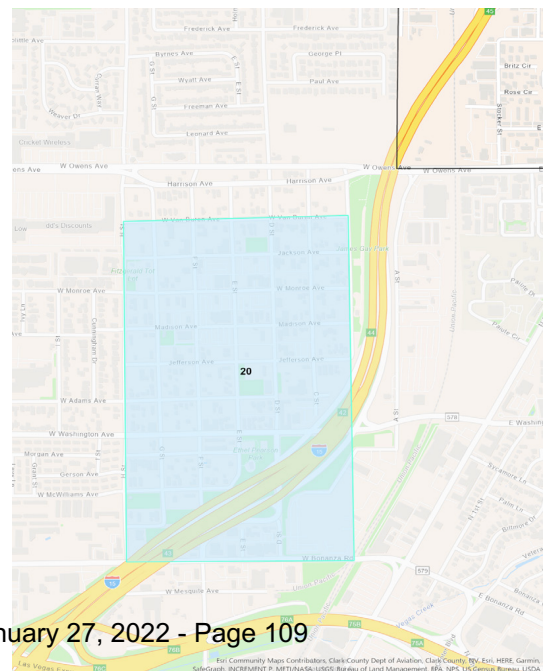

City of Las Vegas Historic Resource Reports

Title: Berkley Square Historic Resource Inventory and Survey

Type: Historic Resource Survey **Ward:** 5

Date: 8/1/2005 **Project Year:** 2005

Project Area: The survey area includes the entire Berkeley Square Subdivision as originally platted in 1949 and recorded in 1954. This includes the lots to either side of Byrnes Avenue, Wyatt Avenue, Freeman Avenue and Leonard Avenue between D and H Streets.

Period of Significance: 1954-1958

Description:

The purpose of this survey and inventory was to assess the historic importance of the Berkeley Square subdivision, identify the context within which it developed, and document the properties and evaluate their historic and architectural importance and integrity. Because of the potential of the area for a historic district, registration requirements were developed for the homes and an initial determination made as to whether they would be contributing or noncontributing to a potential district.

Findings:

Berkley Square is important as the first minority-built subdivision in Nevada. It is important for its association with the architect, Paul R. Williams, an internationally known African-American architect from Los Angeles who made great strides for his race in the profession. It is also important for its association with one of its financiers, Thomas L. Berkley from Oakland, an African-American attorney, media owner, developer, and civil rights advocate in the Bay Area and beyond. It was one of the new housing developments in Las Vegas designed to improve living conditions for the city's African-American community, thus representing strides that had been made as a result of community activism in the late 1940s and early 1950s. Finally, the homes are good examples of the Contemporary Style Ranch House and the subdivision is a good example of a development designed under the auspices of the Federal Housing Administration's standards of the 1940s. It is recommended that the Berkley Square subdivision be considered for a National Register Historic District, significant at the local level.

Notes:

CLG funded project.

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 7057

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: Painter, Diana (Painter Preservation)

Author Contact: Sonoma Office:
388 Patten Street
Sonoma, CA 95476
E-mail: diana@preservationplans.com
Telephone: (707) 763-6500

Map Notes:

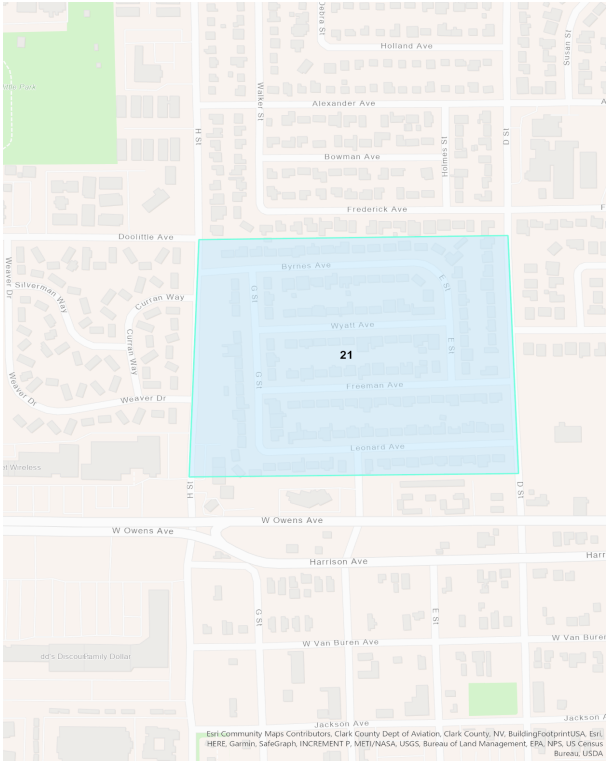

City of Las Vegas Historic Resource Reports

Title: Woodlawn Cemetery National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 5

Date: 1/1/2006 **Project Year:** 2006

Project Area: 1500 N. Las Vegas Blvd.
Las Vegas, NV 89101

Period of Significance: 1914-1956

Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria A and C: Community Planning and Development, Social History, and Landscape Architecture

Notes:
Nomination is over 10 years old; an updated inventory is recommended.

SHPO Report #: n/a

NRIS #: 6001060


Federal Agency: n/a

Client: City of Las Vegas

Author: Joe Thomson

Author Contact: P.O.Box 33807
Las Vegas, NV 89133
(702) 656-8738

Map Notes: Location #22 in map

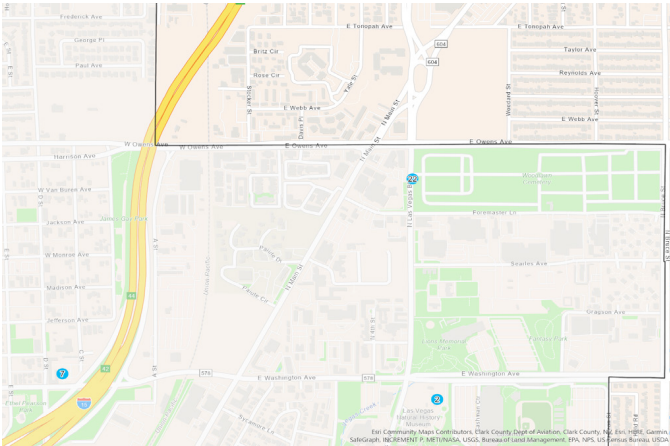

City of Las Vegas Historic Resource Reports

Title: Berkley Square Historic District National Register of Historic Places Nomination

Type: National Register Nomination

Ward: 5

Date: 08/01/2007

Project Year: 2007

Project Area: Area bounded by Byrnes Ave, D St., Leonard Ave and G St.

Period of Significance: 1954-1958

Description:

National Register of Historic Places

Findings:

Significant under Criteria A and C: Black Ethnic Heritage, Community Planning and Development, and Architecture
First minority-built subdivision in Nevada, platted 1949 recorded in 1954. P.R.Williams architect

Notes:

Nomination is over 10 years old; an updated inventory is recommended.

SHPO Report #: n/a

NRIS #: 9000846


Federal Agency: n/a

Client: City of Las Vegas

Author: Painter, Diana

Author Contact: Sonoma Office:
388 Patten Street
Sonoma, CA 95476
E-mail: diana@preservationplans.com
Telephone: (707) 763-6500

Map Notes:

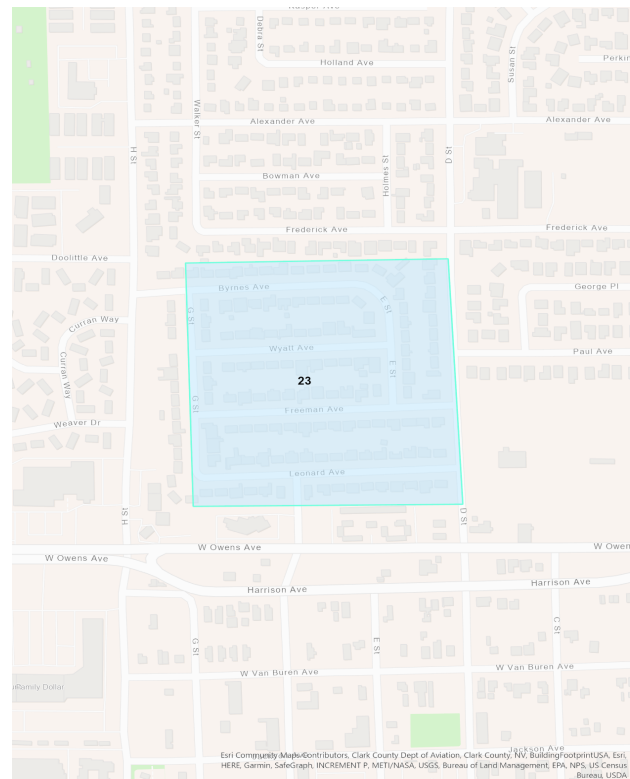

City of Las Vegas Historic Resource Reports

Title: Neon Boneyard Historic Resources Survey and Inventory Report, Las Vegas, Nevada, Phases I & II

Type: Historic Resource Survey

Ward: 5

Date: 12/012008

Project Year: 2008

Project Area: Neon Museum (770 Las Vegas Blvd. N, Las Vegas, NV 89101); Fremont St., Old Las Vegas Mormon Fort Museum

Period of Significance: based on individual historic integrity

Description:

This document presents the results of Phase II of the survey and inventory of the signs housed at The Neon Museum's Bone yard in Las Vegas, Nevada, and the museum's collection of signs that are installed onsite on Fremont Street and in the Old Las Vegas Mormon Fort museum. This survey offers Phase II of the first comprehensive inventory of these signs, as well as the first evaluation of their significance according to National Register of Historic Places (NRHP) Criteria adapted by the City of Las Vegas. Phase I of this project was completed in August 2007.

Findings:

As the result of research and investigations in Phase I and Phase II of this project, 14 signs that were evaluated in Phase I are recommended eligible for nomination to the NRHP. These 14 signs are: Anderson Diary Letters and Bull's Eye, Binion's Horseshoe, Blackjack Motel, Bow and Arrow Motel, City Center Motel, El Portal Theater, The Flame Restaurant (Bottom), The Flamingo, Golden Nugget, La Concha Motel, Normandie Motel, Silver Slipper, Stardust (1958), and Stardust (1968). The remaining 61 signs surveyed as part of Phase I are recommended either not eligible or in need of more information in order to make a determination of NRHP eligibility (see Table 2).

Notes:

HPF Grant #32-02-21631, 32-07-21632.

Project is over 10 years old; an updated study is recommended.

HRIF's not included.

Reach out to the Neon Museum for more information. They are conducting an evaluation of their collections for a conservation project.

SHPO Report #: 6484

NRIS #: n/a


Federal Agency: HPF

Client: City of Las Vegas

Author: TEC, Inc.

Author Contact: 1658 Cole Boulevard, Suite 190
Golden, Colorado 80401
(303) 273-0231

Map Notes: Location #24 in map

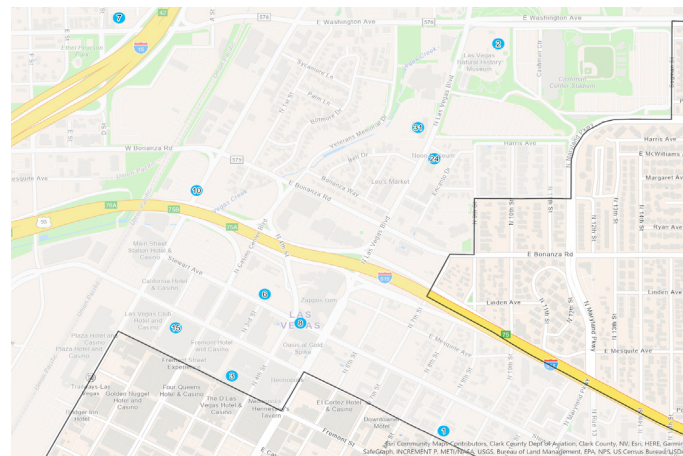

City of Las Vegas Historic Resource Reports

Title: Section 106 H & Monroe Senior Apartments Phase II & III, Historic Resources Survey Report

Type: Section 106 Review

Ward: 5

Date: 12/1/2008

Project Year: 2008

Project Area: APE is bounded by Owens Ave and Madison Ave, north and south, and J St. and F St., west and east.

Period of Significance: 1927-1963

Description:

In anticipation of utilizing Home funds, Tax Credits and private financing to develop and construct Phase II and III of the H&Monroe Senior Apartments, the Community Development Programs Center of Nevada has commissioned RAFI Planning, Architecture and Urban Design to complete a Historic Resources Survey Report in compliance with the Nevada Section 106 Architectural Inventory and Survey process. The research included the historical records regarding the Zaugg and H.F.M&M Tracts.

Findings:

Located in what was considered the Westside of Las Vegas, the area appears to have been developed with no particular community plan, with the forty two (42) properties in this study being constructed between 1927 and 1963. There appears to be no historically significant influences other than typical development patterns, with the exception of the New Town Tavern, located at 600 Jackson Avenue. It has been concluded that no further study is warranted to determine adverse effects of the proposed H & Monroe Senior Apartments Phase II & Phase III, other than the possible eligibility of the New Town Tavern under Criterion A of the National Register of Historic Places.

Notes:

Project is over 10 years old; an updated study is recommended.

Refer to the 2019 Historic Context and survey for the Historic Westside for information on the historic significance of the neighborhood

SHPO Report #: 3024

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: RAFI Planning, Architecture, Urban Planning

Author Contact: 155 S Water St, Henderson, NV 89015
(702) 435-7234
info@rafiarchitecture.com

Map Notes:

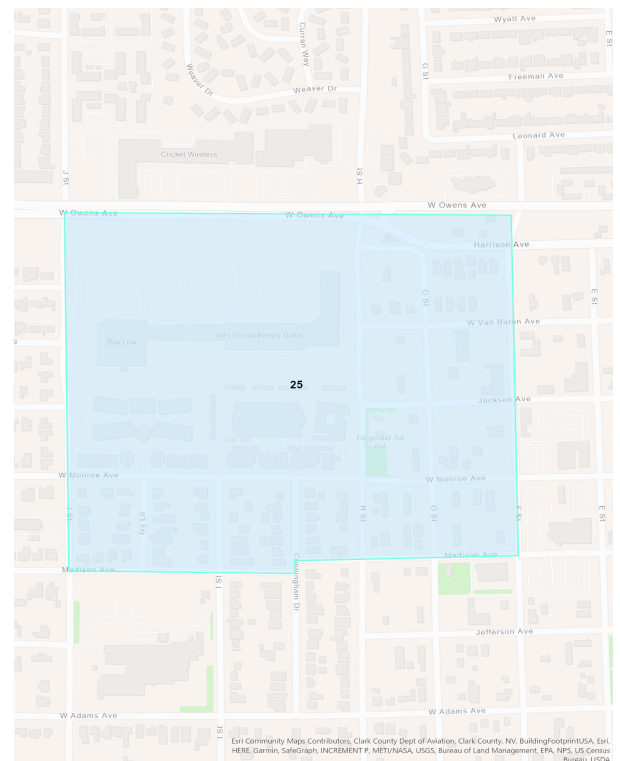

City of Las Vegas Historic Resource Reports

Title: Lorenzi Park National Register of Historic Places Nomination

Type: National Register Nomination

Ward: 5

Date: 08/01/2010

Project Year: 2010

Project 3333 W. Washington

Area: Las Vegas, NV 89101

Period of Significance: 1949-1965

Description:

National Register of Historic Places Nomination

Findings:

Significant under criteria A: Entertainment and Recreation

Notes:

Listed on the state register only. reference no. 130150.

The nomination is over 10 years old; an updated inventory is recommended.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency:

Client: City of Las Vegas

Author: Angela Moore

Author 3913 Lighthouse Ave
Contact: Las Vegas, NV 89110
(702) 335-5702

Map Notes: Location #26 in map

City of Las Vegas Historic Resource Reports

Title: Determination of Eligibility and Finding of Effect Report for Neon Museum Visitor Center, Las Vegas, Nevada

Type: Section 106 Review

Ward: 5

Date: 4/1/2011

Project Year: 2011

Project Area: The Area of Potential Effects (APE) extends one parcel deep in each direction from the ADI: north across McWilliams Drive, east across Encanto Drive, south to Wilson Avenue, and west across North Las Vegas Boulevard, including the Reed Whipple Cultural Center at 821 North Las Vegas Boulevard.

Period of Significance: <1961

Description:

The Federal Highway Administration (FHWA) and the Nevada Department of Transportation (NDOT) propose to use National Scenic Byways Program funds to finance, in part, construction of the Neon Museum Visitor Center (Visitor Center). This project includes the following:

- Rehabilitation of the historic hyperbolic paraboloid arches of the 1961 Paul Revere Williams designed La Concha Motel Lobby (Lobby), previously relocated to its current site at 770 North Las Vegas Boulevard (receiver site);
- Rehabilitation of the Lobby for use as a Visitor Center; and
- Construction of a single story addition housing offices, support space, and restrooms adjoining the Lobby's east (rear) elevation.

Findings:

An Area of Direct Impact (ADI) was identified, encompassing the subject property's parcels: 139-27-805-005 and 139-27-812-045. The Area of Potential Effects (APE) extends one parcel deep in each direction from the ADI: north across McWilliams Drive, east across Encanto Drive, south to Wilson Avenue, and west across North Las Vegas Boulevard, including the Reed Whipple Cultural Center at 821 North Las Vegas Boulevard. The area of land covered in this report comprises 20 parcels and 10.83 acres. The Lobby is the only historic resource identified in the APE that is eligible for listing in the National Register of Historic Places (National Register). The project conforms to the Secretary of the Interior's Standards for the Treatment of Historic Properties and thus will have No Adverse Effect as proposed improvements will not alter characteristics that make this property eligible for listing in the National Register.

Notes:

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 6868

NRIS #: n/a


Federal Agency: FHWA

Client: NDOT

Author: Chattel Architecture, Planning, & Preservation

Author Contact: Los Angeles Office
13417 Ventura Blvd.
Sherman Oaks, CA 91423
(818) 788-7954
info@chattel.us

Map Notes:

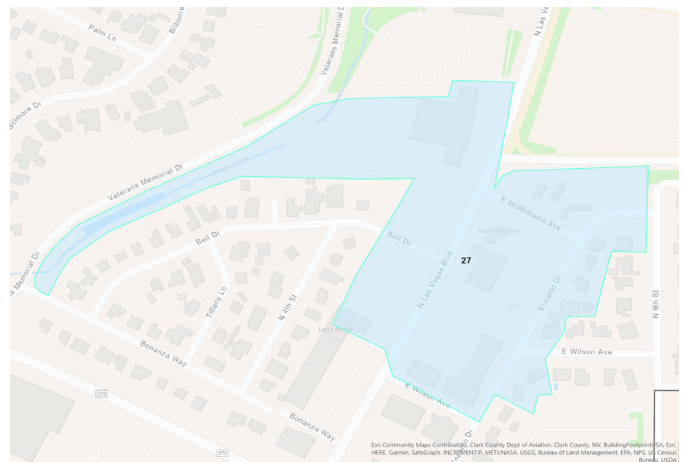

City of Las Vegas Historic Resource Reports

Title: Harrison's Guest House National Register of Historic Places Nomination

Type: National Register Nomination

Ward: 5

Date: 3/1/2014

Project Year: 2014

Project 1001 F. Street
Area: Las Vegas, NV 89106

Period of Significance: 1942-1960

Description:

National Register of Historic Places Nomination

Findings:

Significant under Criteria A: Ethnic Heritage/Black, Entertainment/Recreation

Notes:

SHPO Report #: n/a

NRIS #: 15000009

Federal Agency: n/a

Client: unknown

Author: Mella Rothwell Harmon

Contact: 2042 Meritage Court
Sparks , NV 89434
mellaharmon@gmail.com
telephone: 775-322-2850

Map Notes: Location #29 in map

City of Las Vegas Historic Resource Reports

Title: La Concha Motel Lobby State Register of Historic Places Nomination

Type: Local Register Nomination **Ward:** 5

Date: 5/6/2015 **Project Year:** 2015

Project Area: 770 N. Las Vegas Blvd.
Las Vegas, NV 89101

Period of Significance: 1961

Description:

The La Concha Motel Lobby is significant under Criterion C in the field of Architecture for its reflection of thin shell concrete construction methods, for its design by significant architect Paul R. Williams, and as a rare extant reflection of Googie style commercial architecture in Las Vegas, Nevada.

Findings:

The La Concha Motel was originally constructed in 1961 at 2955 South Las Vegas Boulevard in Unincorporated Clark County, Nevada, along what is colloquially known as the Las Vegas Strip. It was designed by internationally known African-American architect Paul Revere Williams and built for M.K. Doumani, whose family operated the Motel at this location from 1961 to 2002 when it closed. The Motel originally included a free form concrete shell Lobby and a rectangular two-story Motel wing adjoining the rear of the Lobby. In 2004 the Motel wing was demolished. The Lobby was moved to its current site at 770 North Las Vegas Boulevard in 2007. Its defining features are the three large, parabolic bays of four inch concrete, with glass and steel curtain walls and entry doors. It currently sits in a high density commercial district in Las Vegas proper along North Las Vegas Boulevard where it serves as the visitor center for the Neon Museum and its adjoining "Bone yard," the outdoor interpretative display of mid-century neon road signs. The Museum's neighboring buildings include a residential subdivision, a hotel, and a shopping center.

Notes:

In the Nevada State Register, reference no. 150154

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: Neon Museum

Author: Jim Bertolini, Nevada State Historic Preservation Office

Author Contact: 901 S. Stuart St. STE. 9004
Carson City, NV 89701
(775) 684-3436

Map Notes: Location #24 in map

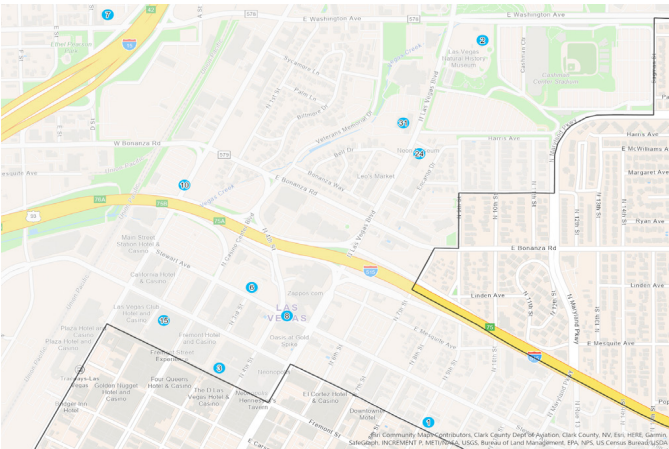

City of Las Vegas Historic Resource Reports

Title: Reed Whipple Cultural Center National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 5

Date: 12/15/2016 **Project Year:** 2016

Project Area: 821 North Las Vegas Boulevard

Period of Significance: 1962

Description:
National Register of Historic Places Nomination

Findings:
Significant under Criteria C: Architecture

Notes:
The NRHP nomination is not acceptable under religious affiliation. The historic context needs to be updated to reflect the building's significance under criteria C, Architecture.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: North Wind Resource Consulting

Author Contact: 2025 N. 3rd Street Suite B260
Phoenix, AZ 85004
Phone: (602) 362-8046

Map Notes: Location #31 in map

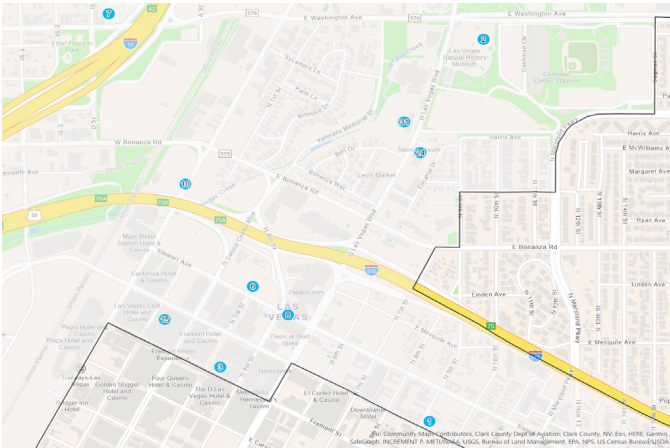

City of Las Vegas Historic Resource Reports

Title: Helen Toland Residence City of Las Vegas Historic Register Nomination

Type: Local Register Nomination **Ward:** 5

Date: 6/7/2018 **Project Year:** 2018

Project Area: 1134 Comstock Dr. Las Vegas, Nevada 89106

Period of Significance: 1972

Description:
Application for City of Las Vegas Historic Designation

Findings:
Significant for Helen Toland's impact on African American culture and education

Notes:

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: unknown

Author: Rochelle Hooks

Author Contact: 6300 McCarran St. Unit 1075
North Las Vegas, NV 89081
702-610-9841
rhooks73@gmail.com

Map Notes: Location #32 in map

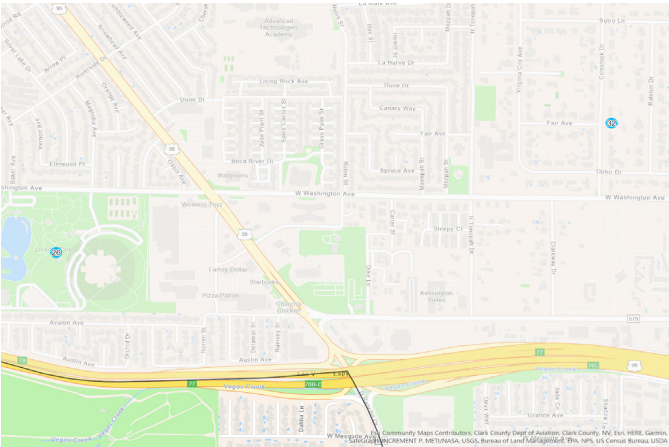

City of Las Vegas Historic Resource Reports

Title: Historic Context Report for the Historic Westside Neighborhood

Type: Historic Context

Date: 12/31/2020

Project Area: The survey area is generally bounded by West Lake Mead Boulevard, I-15, US 95, and North Martin Luther King Boulevard on the north, east, south, and west, respectively, in Las Vegas, Clark County, Nevada.

Period of Significance: <1969

Description:

NPF contracted with North Wind Resource Consulting, LLC to prepare a historic context report for the Historic Westside neighborhood; a windshield survey of approximately 1,138 properties within the survey area; and a reconnaissance survey of targeted properties. The historic context report, which describes the history of the historic Westside neighborhood and its associated cultural resources, will serve as a planning tool to be used by NPF as part of their continued effort to identify, document, and evaluate the eligibility of previously undocumented historic residential properties in the historic Westside neighborhood for inclusion in the National Register of Historic Places (NRHP).

Findings:

This document includes five historic contexts which are used to frame the early settlement and growth of West Las Vegas from its founding in 1905 to the present-day. These include: 1) Initial Establishment of the HWN; 2) Segregation and Development of an African American Community in the HWN; 3) World War II (W.W.II) and Postwar Community Development in the HWN; 4) African American Exodus from the Westside; and 5) Economic Decline and Rehabilitation Efforts in the HWN.

North Wind recommends one multifamily subdivision, the Cadillac Arms tract, constructed in 1953, as eligible for listing in the NRHP under Criterion A for its association with postwar defense housing and the Civil Rights movement in the HWN; and under Criterion C for its association with African American architect Paul R. Williams. North Wind also recommends two public housing developments, Marble Manor, constructed in 1952, and Sherman Gardens Annex, constructed in 1964, as eligible under Criterion A for their association with postwar public housing development and the Civil Rights movement in the HWN. Additionally, the Sherman Gardens Annex is recommended as eligible under Criterion C for its Contemporary style architecture.

Notes:

SHPO Report #: n/a


NRIS #: n/a

Federal Agency: n/a

Client: Nevada Preservation Foundation

Author: North Wind Resource Consulting

Author 2025 N. 3rd Street Suite B260
Contact: Phoenix, AZ 85004
Phone: (602) 362-8046

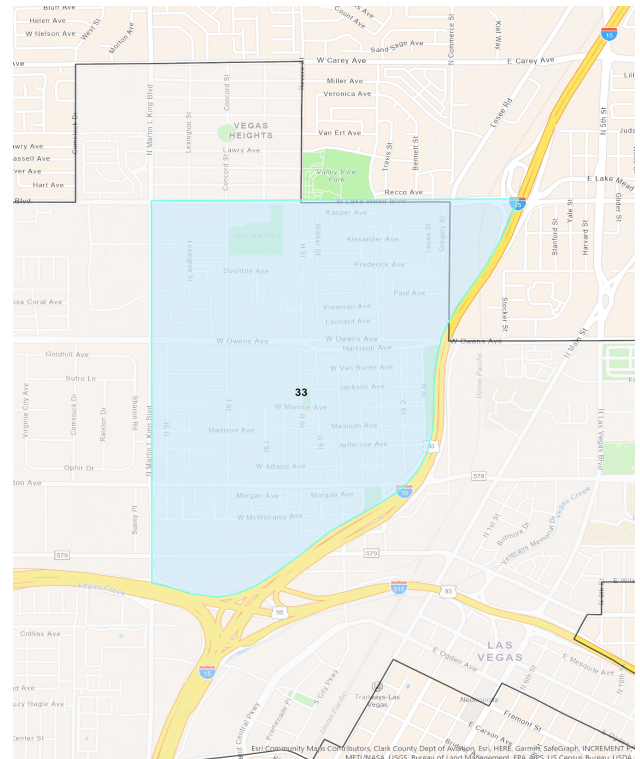

City of Las Vegas Historic Resource Reports

Title: The African American Civil Rights Experience in Nevada, 1900 - 1979

Type: Historic Context

Ward: 5

Date: 08/01/2020

Project Year: 2020

Project Area: Historic Westside Neighborhood

Period of Significance: 1900-1979

Description:

This context was prepared for the Nevada State Historic Preservation Office (NVSHPO) under the auspices of the National Park Service (NPS) African American Civil Rights Grant Program. In 2018, the NVSHPO received an African American Civil Rights Grant through the NPS to increase awareness and representation of African American heritage in Nevada. In fulfillment of that grant, the NVSHPO contracted SWCA Environmental Consultants (SWCA) to complete a historic context for the African American experience in the state. This context is intended to focus particularly on the civil rights movement of the twentieth century and the identification of property types (including buildings, structures, objects, sites, and districts) that are on or may be eligible for listing in the NRHP because of their importance to and representation of civil rights history and African American heritage.

Findings:

47 Historic resources identified in Las Vegas, NV. Resources include commercial and residential properties, schools, religious structures, and historic districts.

Notes:

The historic resources identified in the report require additional study to determine their condition and eligibility to the local/state/national registers.

SHPO Report #: n/a


NRIS #: n/a

Federal Agency: n/a

Client: NV SHPO

Author: SWCA Environmental

Author Contact: 257 East 200 Suite 200
Salt Lake City, Utah 84111
(801) 322-4307
www.swca.com

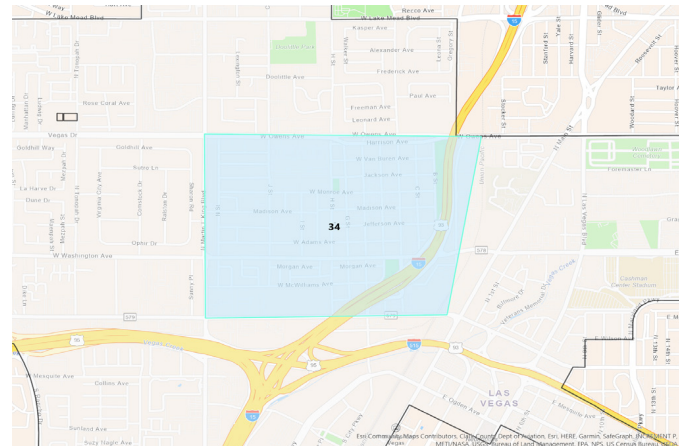

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Brief History of Redevelopment Efforts in the Historic Westside Neighborhood

Type: Section 106 Review

Ward: 5

Date: 11/30/2020

Project Year: 2020

Project Area: Study area is generally bounded by W. Owens Avenue, B Street, W. Bonanza Road, and H Street on the north, east, south, and west, respectively. This boundary contains the McWilliams, Valley View, and H.F.M & M tracts.

Period of Significance: <1969

Description:

The City is planning to demolish the former Greater New Jerusalem Church and F. N. Addison Education & Fellowship Center located at 1100 and 1122 D Street, respectively; and the Community Food Pantry, located at 308 Jefferson Avenue, in Las Vegas, Clark County, Nevada. As the project is being funded through the HUD Community Development Block Grant (CDBG) program, it is considered an undertaking subject to the requirements of Section 106 of the NHPA of 1966 (as amended).

As the demolition of the three historic-age buildings has been determined to be an adverse effect, a Memorandum of Agreement (MOA) outlining stipulations to be implemented in order to take into account the effect of the undertaking on historic properties was drafted and was fully executed on July 5, 2019. North Wind Resource Consulting, LLC was contracted by the City to document the three historic-age buildings, as well as prepare a summary paper regarding the history of redevelopment efforts in the Historic Westside Neighborhood between 1940 and the present, in partial fulfillment of the mitigation requirements of the MOA.

Per the MOA, this report includes a 1) brief context on why the Westside lost economic energy over the 1970s; 2) community efforts to revitalize the area since the 1940s; and 3) a snapshot record of demolition in the neighborhood since the 1960s.

Findings:

Between the 1930s and early 1990s, physical isolation, disinvestment, and racist and segregationist policies resulted in the significant loss and deterioration of the built environment, infrastructure, cultural ownership, and economic opportunities. Nonprofit and religious organizations, federally- and locally funded programs, and local planning efforts have attempted to repair the community in recent decades. However, much of the efforts have focused on singular issues, as opposed to a holistic coordination between agencies; never came to fruition; or disregarded the historical culture of the Westside, resulting in scattered improvements and eroding community trust. A review of Clark County Assessor's data has revealed that approximately 44 percent of the Westside study area is undeveloped. Twenty-two percent of the undeveloped land is owned by religious organizations, and 13 percent is owned by the City. Of the 498 parcels remaining in the study area since the I-15 was constructed, only 38 were developed in the last 50 years.

Notes:

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: HUD

Client: City of Las Vegas

Author: North Wind Resource Consulting

Author 5740 Arville St
Contact: Suite 209
Las Vegas, Nevada 89118
United States
Phone: (702) 547-6628
contactus@northwindgrp.com

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Biltmore Bungalows Updated Historic Resource Survey

Type: Historic Resource Survey **Ward:** 5

Date: 12/31/2021 **Project Year:** 2021

Project Area: The survey area is roughly bounded by Washington Avenue and Bonanza Drive on the north and south, and North Main Street and North Ninth Street on the west and east, respectively.

Period of Significance: 1941-1950

Description:
A Historic Resource Survey update, based on the 2003 Biltmore Survey conducted by 20th Century Preservation.

Findings:
As of June 2021, the survey update is currently in progress.

Notes:
As of June 2021, the update currently in progress. Tentatively scheduled to be completed by December 2021

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: City of Las Vegas

Author: Nevada Preservation Foundation

Author Contact: 330 W. Washington Blvd. Ste 106 Las Vegas,
NV 89106
(855) 968-3973 ext. 703
info@nevadapreservation.org


Map Notes:



Ward 6

The following projects are located within ward 6 of the City of Las Vegas. The map illustrates the boundary of ward 6 in gray and the location of each project highlighted in blue. The map number correlates to the numbers listed in the Ward 6 Project table. The individual historic resource records are listed chronologically and alphabetically, and contain a map of each location for better geographic reference.

Ward 6 Historic Resource Catalog

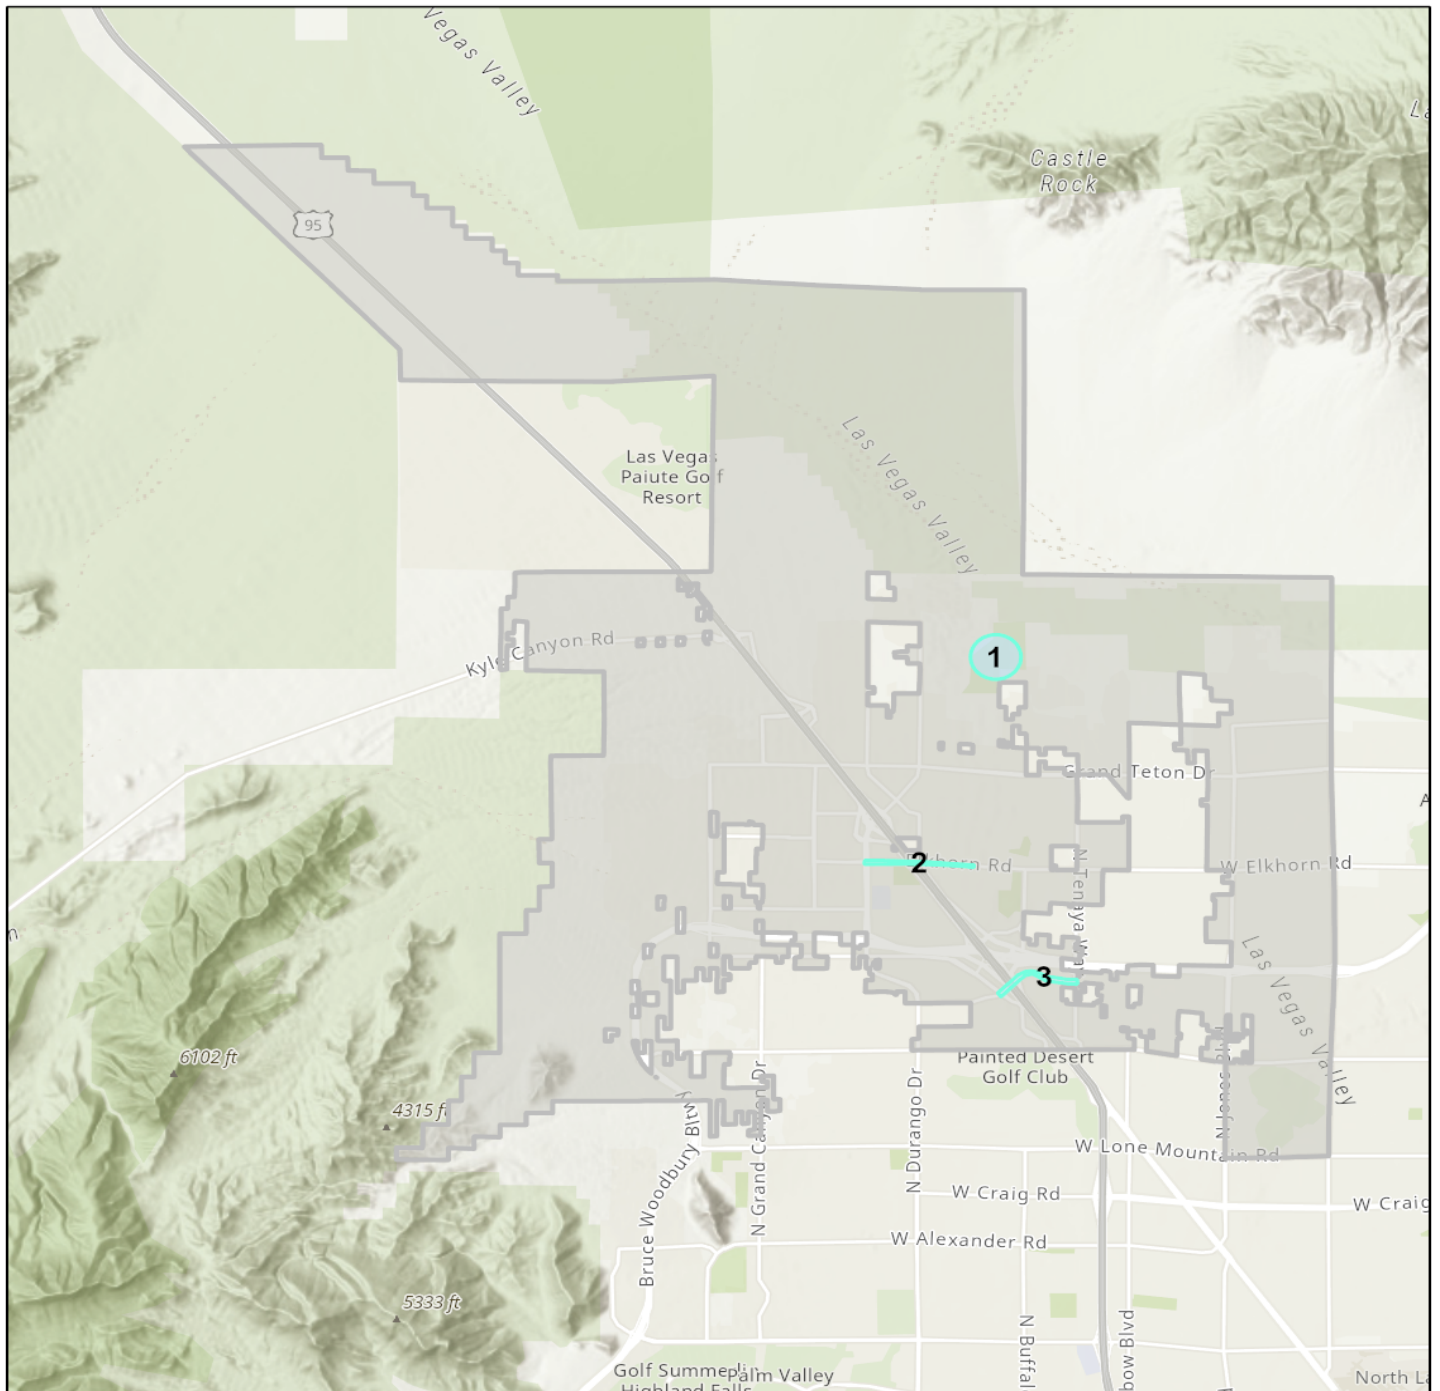


8/14/2021

City of Las Vegas Wards

6

1:144,448



Clark County Dept of Aviation, Esri, HERE, Garmin, SafeGraph, METI/
NASA, USGS, Bureau of Land Management, EPA, NPS, USDA, Esri,
NASA, NGA, USGS

Nevada Preservation Foundation
City of Las Vegas

Special Historic Preservation Commission January 27, 2022 - Page 127

Figure 12: City of Las Vegas Ward 6 Map

Wards 6 Projects

Map #	TITLE	PROJECT AREA	WARD #	PROJECT YEAR
1	Floyd Lamb Park Structural Survey I	9200 Tule Springs Road, Las Vegas, NV 89131	6	1977
1	Floyd Lamb Park Structural Survey II	9200 Tule Springs Road, Las Vegas, NV 89131	6	1977
1	Floyd Lamb State Park National Register of Historic Places Nomination	9200 Tule Springs Road, Las Vegas, NV 89131	6	1977
1	Archaeological, Historical and Paleontological Survey of Floyd R. Lamb State Park	9200 Tule Springs Road, Las Vegas, NV 89131	6	1977-1978
N/A	RESTRICTED Tule Springs Archeological Site National Register of Historic Places Nomination		6	1979
1	Floyd Lamb Park Building Survey	9200 Tule Springs Road, Las Vegas, NV 89131	6	1992
1	A Cultural Resource Investigation of Improvements at Floyd R. Lamb State Park	9200 Tule Springs Road, Las Vegas, NV 89131	6	1993
2	Cultural and Historical Resources Technical Report, Elkhorn Road Overpass Project, City of Las Vegas, Nevada	The Area of Potential Effects (APE) for archaeological resources was determined to be the existing rights-of-way in the project area; Elkhorn Road across US 95 between Cimmaron and Durango Road.	6	2001
3	Class III Archaeological Survey and Architectural Assessment of 32.12 Acres for the Tropical Overpass Located at US 95, Las Vegas, Clark County, Nevada Formal study report	The Tropical Overpass project area extends from Azure Drive at Tenaya Way on the east side of U.S. 95 to Azure Drive and Centennial Center Boulevard on the west side of U.S. 95. It includes an expanded overpass and the realignment of Tropical Parkway.	6	2002
3	A Class III Archaeological Survey and Architectural Assessment of 32.12 Acres for the Tropical Overpass Located at US 95, Las Vegas, Clark County, Nevada (Cultural Resource Division Clearance Report No. 359 (N)) Photo log and photo documentation	The Tropical Overpass project area extends from Azure Drive at Tenaya Way on the east side of U.S. 95 to Azure Drive and Centennial Center Boulevard on the west side of U.S. 95.	6	2002
1	Floyd Lamb Park Master Plan	9200 Tule Springs Rd, Las Vegas, NV 89131	6	2007
1	Floyd Lamb Park at Tule Springs Historic Survey	9200 Tule Springs Rd, Las Vegas, NV 89131	6	2008
#	SAME LOCATION			
#	SAME LOCATION			

City of Las Vegas Historic Resource Reports

Title: Floyd Lamb Park Structural Survey I

Type: Inventory

Ward: 6

Date: 11/7/1978

Project Year: 1977

Project Area: 9200 Tule Springs Road, Las Vegas, NV 89131

Period of Significance: n/a

Description:

The structural condition of the existing buildings in the park, as evaluated during a site inspection, is set forth in this report. The inspection was made primarily to determine if the structures were constructed in conformance with present code requirements. Most of the evaluation was made on a walkthrough visual inspection basis. However, the Water Tower and the Hay Barn were inspected in more detail by removing finish materials so that the structural systems were exposed for photographing and measurement.

Findings:

n/a

Notes:

Structural assessment report, not a historic resource report.

Inventory is over 40 years old; an updated inventory is recommended.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: unknown

Author: Vhay & Ferrari, LTD. Architects

Author Address on record:
Contact: 1365 Haskell Street
Reno, Nevada 89509

No current contact info available

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Floyd Lamb Park Structural Survey II
Type: Inventory **Ward:** 6
Date: 11/7/1978 **Project Year:** 1977

Project Area: 9200 Tule Springs Road, Las Vegas, NV 89131

Period of Significance: n/a

Description:
Inventory of buildings at Floyd Lamb Park, including photo documentation and architectural drawings.

Findings:
n/a

Notes:
Structural assessment report, not a historic resource report.


Inventory is over 40 years old; an updated inventory is recommended.

This inventory was used to support and supplement the 1981 Floyd Lamb Park NRHP Nomination.

SHPO Report #: n/a
NRIS #: n/a
Federal Agency: n/a
Client: unknown
Author: Vhay & Ferrari, LTD. Architects
Author Contact: Address on record:
1365 Haskell Street
Reno, Nevada 89509

No current contact info available

Map Notes:

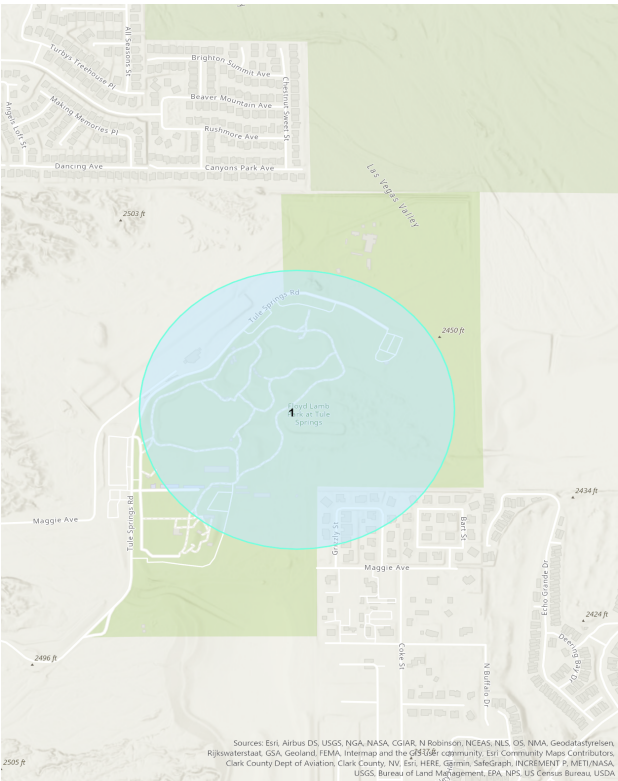

City of Las Vegas Historic Resource Reports

Title: Floyd Lamb State Park National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 6

Date: 5/1/1980 **Project Year:** 1977

Project Area: 9200 Tule Springs Road, Las Vegas, NV 89131

Period of Significance: 1941-1959

Description:

National Register of Historic Places Nomination
A collection of 23 buildings are being considered in this nomination.

Findings:

Significant under Criteria A and C, for architecture and social/humanitarian significance

Notes:

Nomination is over 40 years old. An updated resource inventory is recommended.

SHPO Report #: n/a

NRIS #: 81000383

Federal Agency: n/a


Client: n/a

Author: Southern Nevada Historical Society

Author Contact: Contact info on record:
PO Box 1358, Las Vegas, NV 89125

No current contact information available. The organization ended in the mid-1980's.

Map Notes:

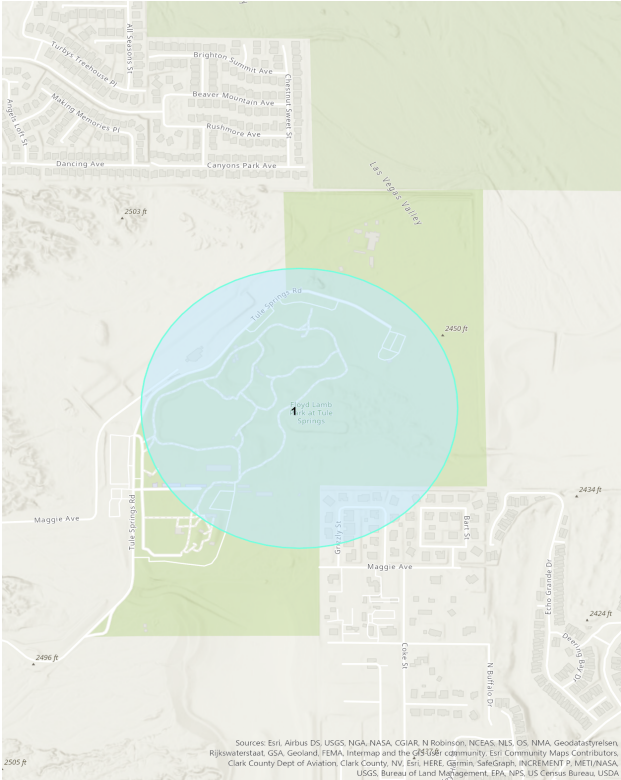

City of Las Vegas Historic Resource Reports

Title: Archaeological, Historical and Paleontological Survey of Floyd R. Lamb State Park

Type: Archeological Study **Ward:** 6

Date: 3/1/1978 **Project Year:** 1977-1978

Project Area: 9200 Tule Springs Road, Las Vegas, NV 89131

Period of Significance: prehistoric - 1940's

Description:

This project is a prehistoric, historic and paleontological inventory and was not designed to include intensive ethnographical, environmental, or comparative archaeological research. Previous archaeological surveys conducted in this area were utilized to supplement the field observations of the geology, geography and biotic communities, in addition to providing other data with regard to the locations of potential site areas. Field observations were recorded for the specific areas surveyed concerning geography, botanical and biotic communities to establish the environmental setting and are included in this report.

Findings:


Paleontological, Archeological, and Historic findings listed on page 15 of the report.

Notes:

Study is over 40 years old; an updates study is recommended

SHPO Report #: n/a
NRIS #: n/a
Federal Agency: n/a
Client: Division of Preservation and Archeology, State of Nevada
Author: Museum of Natural History, UNLV
Author Contact: 4505 S. Maryland Parkway
Las Vegas, NV 89154

Map Notes:

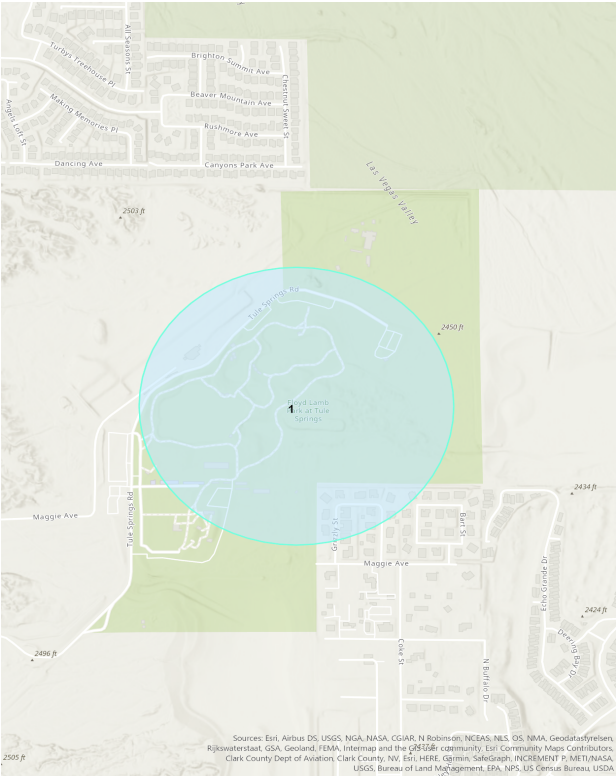

City of Las Vegas Historic Resource Reports

Title: Tule Springs Archeological Site National Register of Historic Places Nomination

Type: National Register Nomination

Ward: 6

Date: **Project Year:** 1979

Project Area: Restricted

Period of Significance: unknown

Description:
National Register of Historic Places Nomination

Findings:

Notes:
Restricted. Only accessible on the City of Las Vegas, Historic Preservation Officer's account and are not to be shared.

SHPO Report #: n/a
NRIS #: 94001575

Federal Agency:
Client:
Author:
Author Contact:

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Floyd Lamb Park Building Survey

Type: Other **Ward:** 6

Date: 3/18/1992 **Project Year:** 1992

Project Area: 9200 Tule Springs Road, Las Vegas, NV 89131

Period of Significance: c.1940 (for historic buildings)

Description:
Analysis and cost report to stabilize and improve the buildings at Floyd Lamb Park.

Findings:
n/a

Notes:
Not a historic resource report

Refer to the Historic Area Stabilization and Renovation section for information on historic structures.

Survey is over 20 years old; a survey update is recommended.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: Nevada Division of State Parks

Author: HSA Architects. Inc.

Author Contact: no current contact information available

Map Notes:

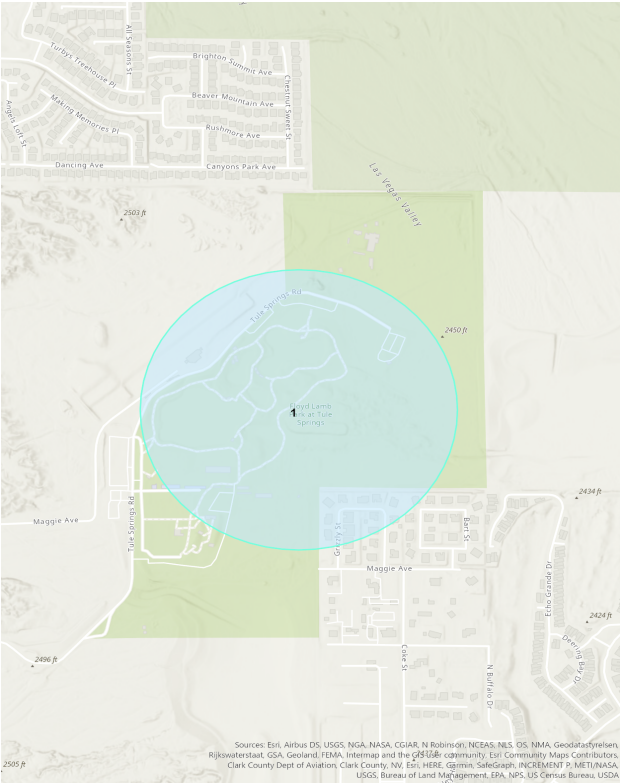

City of Las Vegas Historic Resource Reports

Title: A Cultural Resource Investigation of Improvements at Floyd R. Lamb State Park

Type: Section 106 Review **Ward:** 6

Date: 11/1/1993 **Project Year:** 1993

Project Area: 9200 Tule Springs Road, Las Vegas, NV 89131

Period of Significance: <1943

Description:

The objective of this Class III (BLM) intensive pedestrian field investigation is to identify and record, from surface and exposed profile indications, all cultural materials within the undertaking's area of potential effect for the purpose of compliance with Section 106 of the National Historic Preservation Act of 1966.

Findings:

Although the survey was conducted within a National Register of Historic Places site, no cultural materials were observed within the proposed survey area. All historic structures, as well as any previously reported prehistoric sites, are situated well away from the proposed new residence, septic sewer system, and additional water lines. Approval is recommended for this proposed action.

Notes:

Project is over 20 years old; an updated study is recommended.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a


Client: Nevada Divisions of State Parks

Author: Harry Reid Center for Environmental Studies,
UNLV

Author: 4505 S. Maryland Pkwy

Contact: Las Vegas, NV 89154

Map Notes:

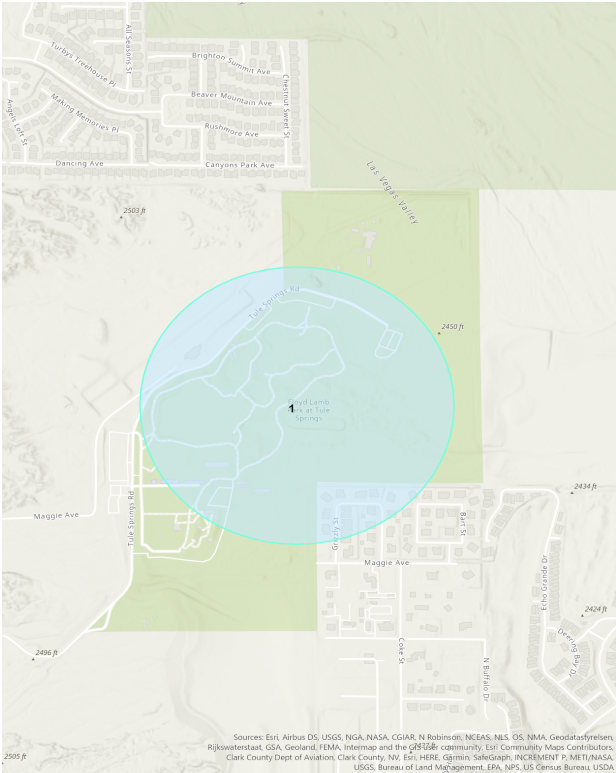

City of Las Vegas Historic Resource Reports

Title: Cultural and Historical Resources Technical Report, Elkhorn Road Overpass Project, City of Las Vegas, Nevada

Type: Section 106 Review **Ward:** 6

Date: 5/21/2000 **Project Year:** 2001

Project Area: The Area of Potential Effects (APE) for archaeological resources was determined to be the existing right-of-ways in the project area; Elkhorn Road across US 95 between Cimmaron and Durango Road.

Period of Significance: <1950

Description:

The City of Las Vegas, in cooperation with the Federal Highway Administration (FHWA) and the Nevada Department of Transportation (NDOT) proposes to construct an overpass across U.S. Route 95 (U.S. 95), at Elkhorn Road. As part of the project, segments of Elkhorn Road will be realigned. Elkhorn Road is roughly parallel to and north of the Northern Las Vegas Beltway, which is under construction. The current project is designed to complete the planned roadway network within the Town Center area of northwest Las Vegas and is not part of the Beltway project.

Findings:

The project limits are El Capitan Way to the west, and to the east, Elkhorn Road at the planned intersection with Frontage Road East/Town Center Loop Road. As a separate project, Frontage Road East/Town Center Loop Road would be realigned to intersect with Elkhorn Road at the east limit of the current project. While the current project provides connections to roadways that are programmed for or under construction, it is considered a separate project. The archaeological APE for the project area is set at the existing right-of-ways. The historic architectural APE includes the view shed of the project area. There will be no easements or direct impacts outside the right-of-ways. Aerial maps and a windshield survey of the APE indicate that there are no structures within the project area that would require historic evaluations. Due to modern residential and commercial development on the south, east, and north sides of the proposed project area, no known historic sites are within the view shed of the historic architectural APE. Two structures, a warehouse and residence/office are located within 1,000 feet of the Elkhorn archaeological APE. Neither structure appears eligible for listing on the National Register due to lack of physical integrity.

Notes:

Project is almost 20 years old; an updates study is recommended.

SHPO Report #: A_112

NRIS #: n/a


Federal Agency: FHWA

Client: City of Las Vegas

Author: Parsons (HBA)

Author Contact: Sacramento Office:
2495 Natomas Park Drive, Suite 510
Sacramento, California 95833
Direct: +1 916.576.2770
Fax: +1 916.576.2771

Map Notes:

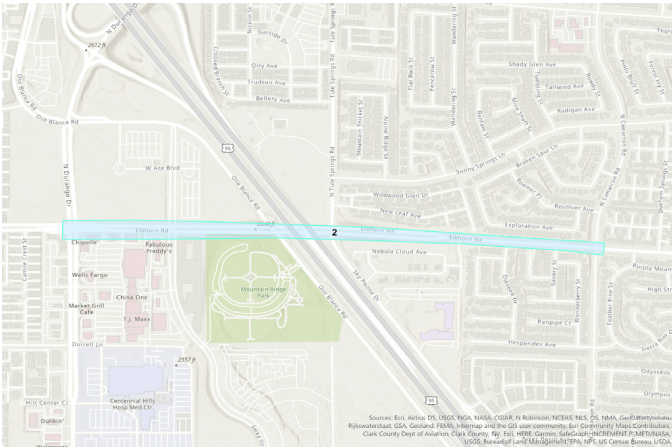

City of Las Vegas Historic Resource Reports

Title: A Class III Archaeological Survey and Architectural Assessment of 32.12 Acres for the Tropical Overpass Located at US 95, Las Vegas, Clark County, Nevada (Cultural Resource Division Clearance Report No. 359 (N))
Ward: 6

Type: Section 106 Review

Date: 4/29/2002
Project Year: 2002

Project Area: The Tropical Overpass project area extends from Azure Drive at Tenaya Way on the east side of U.S. 95 to Azure Drive and Centennial Center Boulevard on the west side of U.S. 95. It includes an expanded overpass and the realignment of Tropical Parkway.

Period of Significance: <1962

Description:

A Class III archaeological survey and an historical architectural assessment of 32.12 acres for the design of an overpass and the realignment of Tropical Parkway at U.S. 95, which is located in the City of North Las Vegas, Clark County, Nevada. The survey was conducted on October 13 and 20, 2001, under Nevada Antiquities Pennit No. 314. This work was performed on behalf of Post, Buckley, Schuh, & Jernigan, Inc. (PBS&J) for the Nevada Department of Transportation (NDOT), Job No. 511353.00 (Tropical Overpass).

Findings:

The SHPO concurred with the following results: a total of 41 properties were identified to be over 40 years old, 38 of which were not NRHP eligible, and 3 properties that were NRHP eligible.

Notes:

Documents include a SHPO determination letter, a photo log, survey log, and photographs only. Refer to SHPO report no. 7104 for formal report.

Survey is 20 years old; a survey update is recommended.

SHPO Report #: A_741


NRIS #: n/a

Federal Agency: FHWA

Client: PBS&J, Inc.

Author: The Cultural Resource Division, The Louis Berger Group, Inc. (Acquired by SWP)

Author Contact: SWP Las Vegas
3753 Howard Hughes Parkway,
Suite 135
Las Vegas, NV 89169
United States
TEL: +1 (702) 697-8100

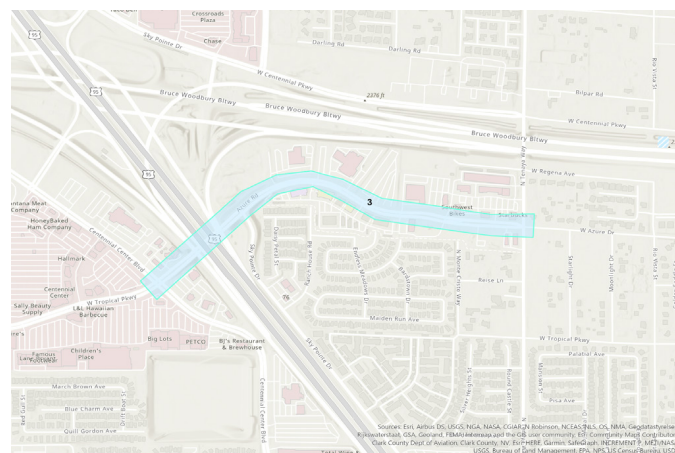

Map Notes:

City of Las Vegas Historic Resource Reports

Title: A Class III Archaeological Survey and Architectural Assessment of 32.2 Acres for the Tropical Overpass Located at US 95, Las Vegas, Clark County, Nevada

Type: Section 106 Review **Ward:** 6

Date: 4/29/2002 **Project Year:** 2002

Project Area: The Tropical Overpass project area extends from Azure Drive at Tenaya Way on the east side of U.S. 95 to Azure Drive and Centennial Center Boulevard on the west side of U.S. 95. It includes an expanded overpass and the realignment of Tropical Parkway.

Period of Significance: <1962

Description:

A Class III archaeological survey and an historical architectural assessment of 32.12 acres for the design of an overpass and the realignment of Tropical Parkway at U.S. 95, which is located in the City of North Las Vegas, Clark County, Nevada. The survey was conducted on October 13 and 20, 2001, under Nevada Antiquities Pennit No. 314. This work was performed on behalf of Post, Buckley, Schuh, & Jernigan, Inc. (PBS&J) for the Nevada Department of Transportation (NDOT), Job No. 511353.00 (Tropical Overpass).

Findings:

No historic, protohistoric, or prehistoric archaeological sites or artifacts were identified within the project area during this survey. No paleontological remains were discovered and, there fore, no paleontological remains will be impacted by the proposed undertaking . No Traditional Cultural Properties nor sensitive ethnographic areas were identified for the project area during the cultural resource inventory. NDOT is undertaking an ethnographic study and Native American consultation program to ensure that no Traditional Cultural Properties will be impacted by the proposed undertaking. Since no potentially eligible cultural resources (e.g., archaeological sites, historic properties, or Traditional Cultural Properties) were found during either the background research or the field surveys (both archaeological and architectural), and no known or visible culturally sensitive areas will be effected by the proposed undertaking, it is recommended that clearance be granted.

Notes:

Project is near 20 years old; an updated study is recommended.

The letter of determination by SHPO concludes there are a total of 41 properties identified to be over 40 years old, 38 of which were not NRHP eligible, and 3 properties that were NRHP eligible. Refer to SHPO report no. A_741 for more information.

SHPO Report #: 7104


NRIS #: n/a

Federal Agency: NDOT

Client: PBS&J, Inc.

Author: The Cultural Resource Division, The Louis Berger Group, Inc. (Acquired by SWP)

Author Contact: SWP Las Vegas
3753 Howard Hughes Parkway,
Suite 135
Las Vegas
NV 89169
United States
TEL: +1 (702) 697-8100

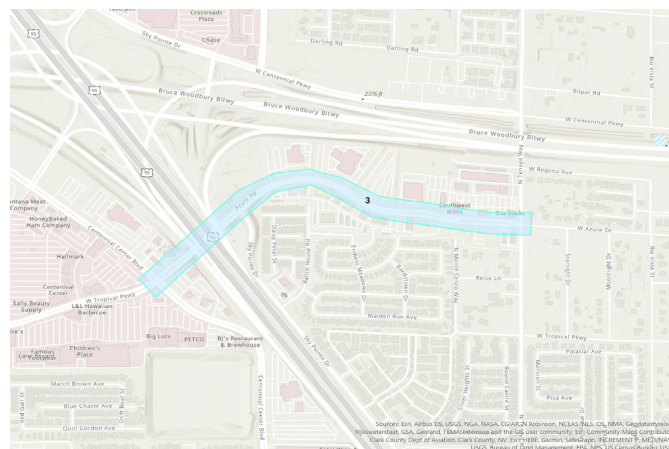

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Floyd Lamb Park Master Plan

Type: Planning/Redevelopment Study

Ward: 6

Date: 4/4/2007

Project Year: 2007

Project Area: 9200 Tule Springs Rd, Las Vegas, NV 89131

Period of Significance: n/a

Description:

In 2007, the State of Nevada owned and maintained Floyd Lamb Park, and leased and maintained the surrounding Recreation and Public Purpose Lands (R&PP) from the Bureau of Land Management. However, due to the increasing costs of park maintenance, the State entered into an agreement with the City of Las Vegas to transfer Floyd Lamb Park, and the R&PP leases for the adjacent lands, to the City. This Master Plan for the Conservation and Redevelopment of Floyd Lamb Park describes prior planning efforts, State transfer requirements and the public planning process. Development and maintenance costs, a phasing plan, and operations and maintenance strategies are also defined within this Plan.

Findings:

n/a

Notes:

The plan lists and describes the historic and cultural resources in the park on page 2-4.

Not a historic resource report.

Project is over 10 years old; an updated study is recommended

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: City of Las Vegas


Author: Greenways Incorporated

JW Zunino & Associates

Author Contact: 31 Woodgate Ct., Durham, NC 27713
(919) 484-8448
chuck.flink@greenways.com

3191 S. Jones Blvd.
Las Vegas, NV 89146
702.253.9390

Map Notes:

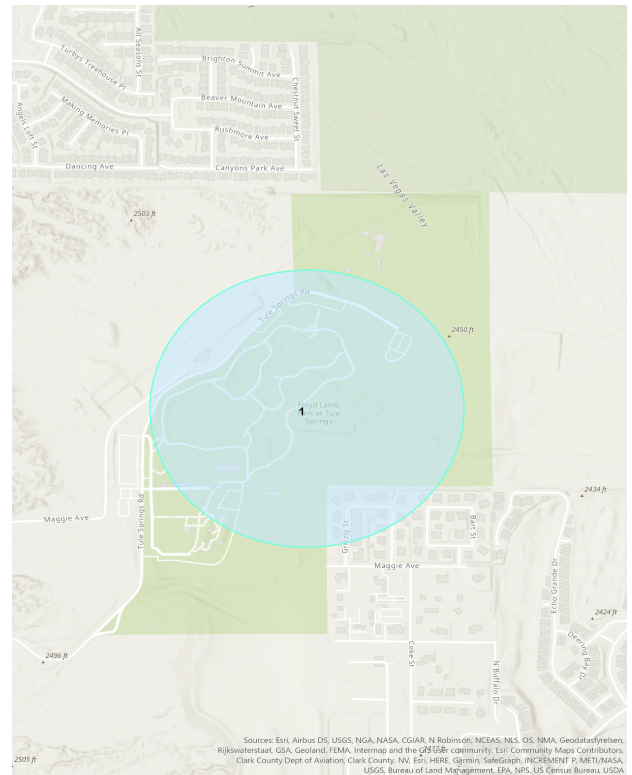

City of Las Vegas Historic Resource Reports

Title: Floyd Lamb Park at Tule Springs Historic Survey

Type: Historic Resource Survey

Ward: 6

Date: 1/1/2009

Project Year: 2008

Project Area: 9200 Tule Springs Rd, Las Vegas, NV 89131

Period of Significance: 1941-1959

Description:

The historic survey report for Floyd Lamb Park at Tule Springs has been prepared for the City of Las Vegas to document existing conditions at the property immediately following the transfer of the property from the State of Nevada on July 12, 2007. Floyd Lamb Park currently operates as a public park used for outdoor recreation, located roughly fifteen miles north-northwest from downtown Las Vegas. The historic period of significance for the property as identified in the National Register of Historic Places (NRHP) nomination was 1941-1959. During this period, the property known as Tule Springs Ranch operated as a working cattle ranch and alfalfa farm that also accommodated paying guests, many of whom traveled to Nevada to take advantage of the state's lenient divorce laws. The majority of aboveground cultural resources extant on the property today are associated with the historic period, and the historic survey report recommends treatment options for each resource that are compatible with both the property's historic significance and its contemporary use as a public park.

Findings:

Preparation of the historic survey report entailed field investigations and archival research, conducted in Las Vegas from June 2008 through September 2008. Field investigations conducted by staff documented and evaluated the 36 extant historic resources and cultural landscape features within the NRHP boundaries of the historic core at Floyd Lamb Park at Tule Springs. Documentation included mapping, photography, identification of significant extant features, a thorough condition and code-compliance assessment, and a visual hazardous materials evaluation. To supplement and inform field investigations, staff performed archival research regarding the historical background and context of the development of Tule Springs Ranch. Research materials ranged from previous survey reports, to primary source archival materials, to secondary source materials chronicling the settlement of the Las Vegas area and the history of divorce in Nevada.

Notes:

Survey is over 10 years old; a survey update is recommended

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: HHM Inc.

Author Contact: 4601 Sinclair Ave
Austin, TX, 78756-3018
United States
Phone
(512) 478-8014
info@hhminc.com

Map Notes:

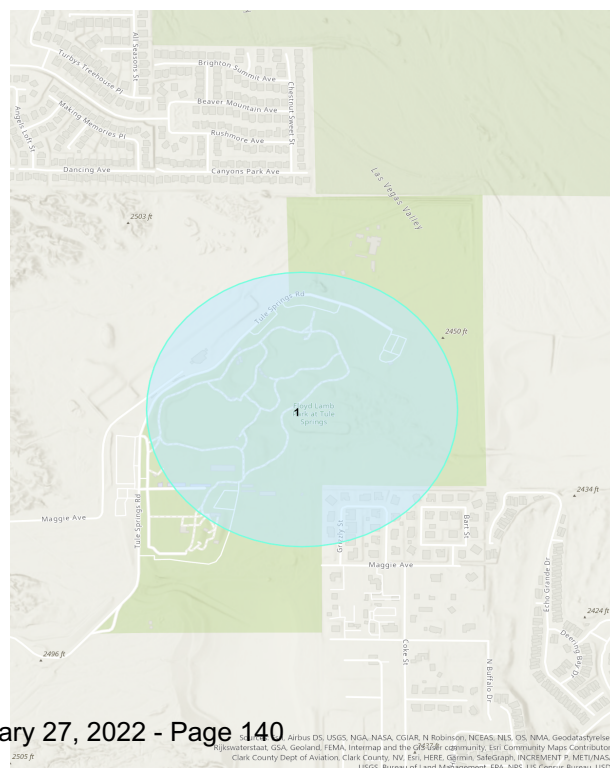

Multiple Wards

The following projects span multiple wards in the City of Las Vegas. The map illustrates the boundary of all 6 wards. The Multiple Ward Project table lists all the projects with their associated wards. The individual historic resource records are listed chronologically and alphabetically, and contain a map of each location for better geographic reference. The numerical labeling on each map is for sequential purposes.


Figure 6: City of Las Vegas Ward Map

City of Las Vegas

Council Wards

Mayor Carolyn G. Goodman

- Ward 1
- Ward 2
- Ward 3
- Ward 4
- Ward 5
- Ward 6

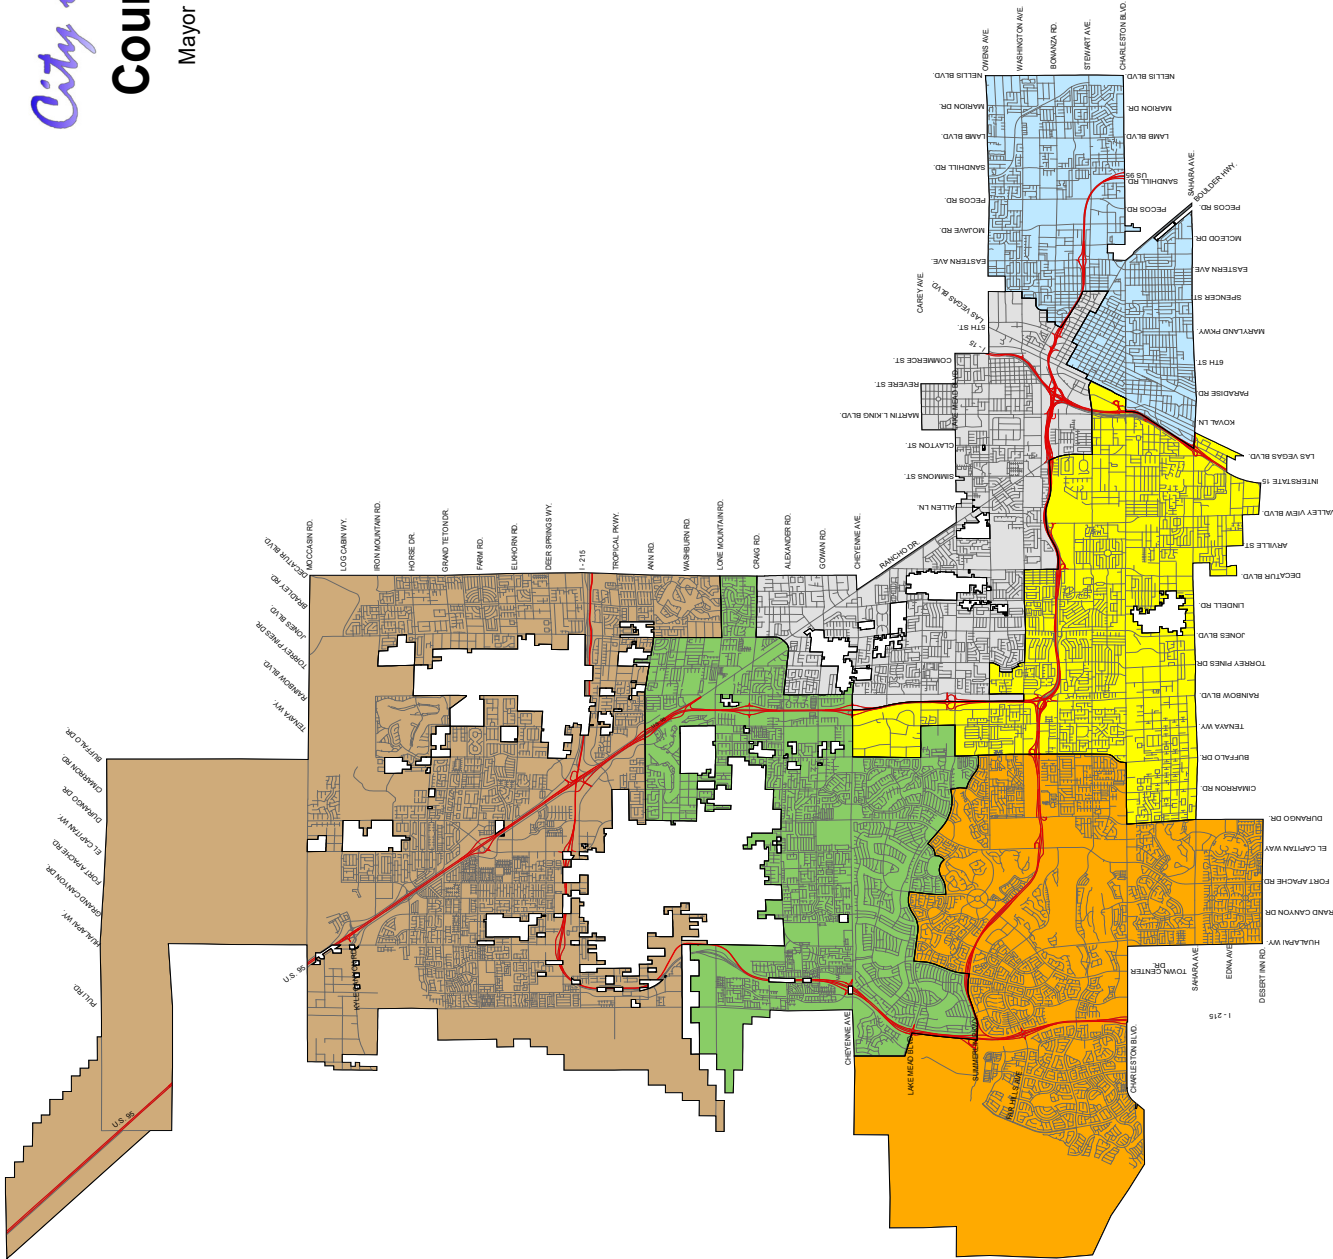

SOURCE: City of Las Vegas, Planning and Development Department
 GIS created from street map
 with the following data:
 City of Las Vegas, Planning and Development Department
 Geographic Information System
 Planning and Development
 Printed: December 10, 2012



Multiple Ward Projects

TITLE	PROJECT AREA	WARD #	PROJECT YEAR
Guide to the Historic Building Survey Photograph Collection	Las Vegas	1,2,3,4,5,6,paradise	1970-1982
UNLV Historic Building Survey Collection 1930 - 2001	Las Vegas, Paradise	1,2,3,4,5,6,paradise	1970-1990
Archaeological Element Historic Preservation Assessment and Planning Process	Downtown Las Vegas; two survey areas roughly bounded by: Charleston Blvd, Eastern Ave, Highland Drive, and Lake Mead Blvd.	1,3,5	1977-1978
Historic Preservation Inventory & Planning Guidelines for the City of Las Vegas	Downtown Las Vegas; two survey areas roughly bounded by: Charleston Blvd, Eastern Ave, Highland Drive, and Lake Mead Blvd.	1,3,5	1977-1978
Cultural Resource Overview of the Las Vegas Valley	City of Las Vegas, Unincorporated Clark County land, and City of Henderson	1,3,5	1983
Historic Resources of Central Las Vegas, Vol I, II, III	Downtown Las Vegas; section 34 of Township 20 South, Range 62 East, as well as the eastern quarter of Section 33, and a small portion of Section 36.	3,5	1984
Neon in Nevada: A Survey of Contemporary and Historic Neon Signs in Nevada, Vol I and II	Reno, Sparks, Carson City, Las Vegas , Lovelock, Winnemucca, Battle Mountain, Elko, Wells, Austin, Eureka, Ely, Hawthorne, Tonopah, Laughlin, Boulder City, South Lake Tahoe and Stateline.	3,5,paradise	1986
Thematic Nomination of Properties Associated with the San Pedro, Los Angeles, and Salt Lake Railroad National Register of Historic Places Nomination	Railroad Cottage District: 601-629 South Casino Center Blvd. Las Vegas, NV 307 South Main St. Las Vegas, Nevada 612 South Main St. Las Vegas, Nevada 700 Dividen Drive, Las Vegas, NV	3,5	1986
Equestrian Facilities Master Plan, Floyd Lamb Park	Northwest Study Area: bounded on the south by Cheyenne Avenue, on the north by Moccasin Drive, on the east by Decatur Blvd, and on the west by Hualapai Way.	4,5,6	1991
Old Spanish Trail/Mormon Road Historic District National Register of Historic Places Nomination	From California border to Arizona across southern Nevada, through Las Vegas	1,2,3,5	2001
Downtown Las Vegas: Historic Resource Survey and Inventory	Survey area is roughly Bonanza Avenue and Charleston Boulevard to the north and south, respectively, and First Street and Maryland Parkway to the west and east, respectively.	3, 5	2002
The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County, Nevada - Binder 1 - 3	Two APE were determined based on the route of the fixed guideway project. The first APE is roughly bounded by Stewart Ave, Casino Center Blvd, Main St., and Sahara Ave. The second APE is roughly bounded by Desert Inn Road, Las Vegas Blvd, and Paradise Road, forming a triangular area.	3, 5, paradise	2002
The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County, Nevada - Binder 4	Main St. between Stewart Ave and Las Vegas, Blvd. Paradise Ave between Las Vegas Blvd and Sahara Ave.	3,5, paradise	2001-2002

TITLE	PROJECT AREA	WARD #	PROJECT YEAR
The Historic Properties Survey Fixed Guideway Project Area of Effect, Las Vegas, Clark County, Nevada - Photographs (Binder 1/3)	South 1st St. Fremont St. Gass Ave. S. Las Vegas Blvd. Lewis Ave.	3,5	2002
The Historic Properties Survey Fixed Guideway Project Area of Effect, Las Vegas, Clark County, Nevada - Photographs (Binder 2/3)	Bonneville Ave. W. California St. S. Casino Center Blvd Commerce St. W. Charleston Blvd E. Charleston Blvd Clark Ave. E. Colorado Ave	3,5	2002
The Historic Properties Survey Fixed Guideway Project Area of Effect, Las Vegas, Clark County, Nevada - Photographs (Binder 3/3)	S. Main St. E. Oakey Blvd Santa Clara Dr. Utah Ave. E. Wyoming Ave.	3,5	2002
An Architectural Assessment of 93 Linear Miles of Alley and Roadway Shoulder Improvements, Las Vegas, Clark County, Nevada - Volume 2 - (Cultural Resource Division Clearance Report No. 454b (N))	The APE is roughly bounded by Floyd Lamb State Park to the north, Flamingo Blvd to the south, Hualapai Way to the west, and Nellis Blvd to the east, in an L-shape form.	1,2,3,4,5,6, paradise	2003
Fremont Street Entertainment District: Windshield Survey for Historic Resources	Survey area 1: Las Vegas Blvd, Carson Ave, 8th St, and Ogden Ave.	3,5	2003
	Survey area 2: Fremont St. between 9th and Eastern Ave.	3,5	2003
Las Vegas Blvd. Scenic Byway Corridor Management Plan	Las Vegas Boulevard (State Route 604) from Sahara Avenue to Washington Avenue.	3,5	2004
An Historic Architectural Survey of 20 Miles (2,763.5 Acres) Along I-515 for the Proposed Freeway Improvements Between I-15 and Foothills Drive, Vol I	I-515 between I-15 and Foothills Drive	3, 5, Paradise, Henderson	2005
Historic Properties Survey, I-15 Corridor Improvement, U.S. 95 to Apex	The Area of Potential Effects (APE) incorporated the I-15 corridor from the I-15/US 95 "Spaghetti Bowl" interchange to Apex in northeast Las Vegas.	3,5, North Las Vegas	2005
Fremont Street Pedestrian Improvements, Las Vegas: Cultural Resources Inventory and Evaluation Report	Fremont St. between Las Vegas Blvd and 8th St	3,5	2006
Historical Architectural Survey Report: US 95 Northwest, Washington Avenue to Kyle Canyon Road, Clark County, Nevada	US 95 NW, Washington Ave to Kyle Canyon Road	1,4,5,6	2007
Project Neon: A Historic Architectural Survey of 3.25 Miles (3,016.7 Acres) Along I-15 for Proposed Freeway Improvements Between US 95 and Edna Avenue, Las Vegas, Clark County, Nevada	I-15, from US 95 to Sahara Ave	1,3,5	2007
1-15 "Project Neon" from Sirius Ave to W. Bonanza Road	The APE encompasses parcels adjacent to 1-15 between Sirius Avenue and West Bonanza Road.	1,3,5	2008
An Architectural Survey and Inventory for the U.S. Vets at the Meadows Housing Project, Las Vegas, Clark County, Nevada	The APE is bounded by Interstate Highway 515, Harris Avenue, Veterans Memorial/Casino Center Boulevard, and N. Maryland Parkway.	3,5	2010
World War II Era Residential Housing in Las Vegas, Clark County, Nevada (1940-1945)	Eastland Heights, Sebec Acres, Biltmore Bungalows, Beckley Subdivision, Vega Verde, Huntridge Subdivision, Charleston Square, Mayfair Subdivision	3,5	2015

TITLE	PROJECT AREA	WARD #	PROJECT YEAR
Intensive Level Architectural Survey of Motor Court Motels along Las Vegas Boulevard and Fremont Street	The survey area is generally bounded by Las Vegas Boulevard on the west, US 95 on the north, Eastern Avenue on the east, and Carson Avenue on the south.	3, 5	2019-2020

City of Las Vegas Historic Resource Reports

Title: Guide to the Historic Building Survey Photograph Collection

Type: Image/Photo

Ward: 1,2,3,4,5,6, paradise

Multiple Wards ☒

Date: 1970-1982

Project Year: 1970-1982

Project Area: Las Vegas

Period of Significance: c. 1920-1950

Description:

The Historic Building Survey Photograph Collection (1970s-1982) contains color and black-and-white photographic prints and contact sheets of historic buildings in Nevada. Included in the collection are photographs of various churches, fire stations, houses, schools, casinos, motels, and other buildings primarily in the Las Vegas, Nevada area. The photographs are from Dr. Ralph Roske's History 117 course taught at the University of Nevada, Las Vegas.

Findings:

226 photographs in 10 folders. The guide contains links to the scanned photographs on UNLV Special Collection website

Notes:

The following resources may provide additional information related to the materials in this collection:
Historic Building Survey Collection, 1930-2001. MS-00762. UNLV Special Collections and Archives
Ralph Roske Papers, 1961-1989. MS-00313. UNLV Special Collections and Archives, University Libraries
Ralph Roske Interviews. Oral History Research Center, UNLV Special Collections

Photographs are over 30 years old. Updated documentation is recommended.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: n/a

Author: UNLV History 117 Students

Author UNLV Special Collection
Contact: 4505 South Maryland Pkwy.
Box 457010
Las Vegas, Nevada
89154-7010
(702) 895-2234

Map Notes: GIS mapping will require additional funding

City of Las Vegas Historic Resource Reports

Title: UNLV Historic Building Survey Collection

Type: Historic Resource Survey

Ward: 1,2,3,4,5,6, paradise

Multiple Wards ☒

Date: 1970-1990

Project Year: 1970-1990

Project Area: Las Vegas

Period of Significance: approx. 1920-1950

Description:

The Historic Building Survey Collection (1930-2001) contains materials on the preservation of historic buildings in Southern Nevada, Arizona, and Utah. The materials come from Dr. Ralph Roske's History 117 course taught at the University of Nevada, Las Vegas in the 1970s and 1980s, and are mostly comprised of surveys of buildings conducted by students during multiple semesters. The surveys include and typed information describing the size, material, and history of the buildings, as well as photographs and blueprints. Some files also contain pamphlets, business cards, event invitations, newspaper clippings, or fliers related to the buildings. Surveyed buildings include businesses, houses, and public sites. The collection also contains a name tracing project from multiple semesters of Dr. Roske's class, which had students compile a list of places individuals lived over the course of their lives.

Findings:

466 surveys listed for the Las Vegas Valley. The surveys do not make recommendations as to the building's historic integrity or NRHP eligibility.

Notes:

There are 466 survey records for "Las Vegas" each with 5-10 pages of information, including a condition assessment, photographs, floor plans, and maps.

UNLV does not have the resources to digitize the entire collection. A separate funding source needs to be organized to undertake this project.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: n/a

Author: UNLV History 117 Students

Author UNLV Special Collection
Contact: 4505 South Maryland Pkwy.
Box 457010
Las Vegas, Nevada
89154-7010
(702) 895-2234

Map Notes: GIS Mapping will require additional funding

City of Las Vegas Historic Resource Reports

Title: Archaeological Element Historic Preservation Assessment and Planning Process

Type: Archeological Study

Ward: 1,3,5

Multiple Wards ☒

Date: 5/1/1978

Project Year: 1977-1978

Project Area: Downtown Las Vegas; two survey areas roughly bounded by: Charleston Blvd., Eastern Ave, Highland Drive, and Lake Mead Blvd.

Period of Significance: <1855

Description:

This archaeological study of Las Vegas' urban core was undertaken as part of the Historic Preservation Assessment and Planning Study initiated by the City of Las Vegas. The project was carried out under a contract between the City of Las Vegas and the Department of Anthropology, University of Nevada, Las Vegas from September 1, 1977 through May 1, 1978. Portions of this report were forwarded to Charles Hall Page and Associates, San Francisco, for inclusion in a joint report to be prepared in their offices. The contract provided for background research in the prehistory ethnography and ethnohistory of Las Vegas, development of criteria for evaluating significance of prehistoric properties in this area, inventory of portions of the City, and preparation of an archaeological sensitivity map. Reports were prepared and submitted for the following projects: Lake Mead Storm Drain, Las Vegas High Lighting, Washington Ave Lighting, Atlantic St. Louis Police Station, and Washington Ave Storm Channel.

Findings:

Summary of Recommendations

1. Completion of the archaeological inventory of the city.
2. Development of a master plan for the archaeological and historical resources of the city.
3. Adoption of an ordinance that:
 - a. directs the Planning Commission to require an impact statement when developments. are proposed for archaeological sensitive areas or establishes an archaeological and historical commission with similar oversight.
 - b. encourages the location of open spaces within proposed subdivisions in such a way to protect archaeological deposits that may occur in such areas.
 - c. directs recreation and park developments to incorporate the acquisition and protection of archaeological localities as part of the program to maintain open space in urban Las Vegas; and
 - d. confers positive protection of archaeological properties in public ownership within the City of Las Vegas.

Notes:

Study is over 40 years old; an updates study is recommended

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: UNLV Department of Anthropology

Author Contact: 4505 S. Maryland Parkway
Las Vegas, NV 89154

Map Notes:

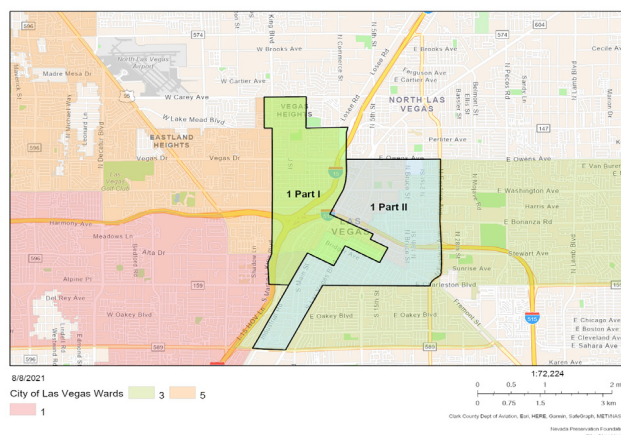

City of Las Vegas Historic Resource Reports

Title: Cultural Resource Overview of the Las Vegas Valley

Type: Historic Resource Survey

Ward: 1,3,5

Multiple Wards ☒

Date: 6/1/1985

Project Year: 1983

Project Area: City of Las Vegas, Unincorporated Clark County land, and City of Henderson

Period of Significance: prehistoric - 1855

Description:

This paper is an attempt to review the existing data for the Las Vegas Valley and suggest a set of research questions and orientations to guide work in the subject area. An existing Class I Overview for Clark County (Hauck et al. 1979) covers much of the data include in this document in a general manner. The current document focuses on a much smaller geographic area than the Las Vegas District or Clark County and introduces data in much greater detail. Numerous small projects have been undertaken in the Las Vegas Valley by the Las Vegas District, Bureau of Land Management (BLM); the University of Nevada, Las Vegas (UNLV); and the Nevada Department of Transportation. Several larger projects have also been undertaken by all three agencies, defined as projects larger than 320 acres. The author has conducted at least five large projects in the last three years, three of which were related to the Santini-Burton Land Sale Act (Rafferty 1981a, 1982a, 1983a). None of the small projects were reviewed by the Class I Overview and most of the larger projects were conducted since the Class I was written. This paper synthesizes the results of these projects within a regional framework.

Additionally, this study attempts to delineate cultural resource sensitivity zones within the valley, thus facilitating decisions concerning the scope and intensity of project-related surveys and mitigate efforts to be made. Another goal of this review is to suggest specific research questions that work in the valley can focus on; questions that need to be answered before cultural resources of the Las Vegas Valley are completely destroyed by urban development.

Findings:

This document has been written to serve as a basis for future research in the Las Vegas region, to begin to identify problems and threats to the cultural resource base, and to suggest some possible solutions and lines of attack. The reader will notice that the writer has some theoretical axes to grind, particularly in the Virgin Anasazi overview section, and he has pushed some very scanty data to its logical (or beyond) limits. This is due to the writer's belief that an overview should not only discuss the accepted archeological viewpoint but should present new ideas and possibilities wherever feasible. In this regard, I hope that I have not been remiss. The Las Vegas area was not, as is not, an archeological wasteland, but a highly sensitive area where the answers to many questions concerning the prehistory of southern Nevada lie. The time to start preserving this data has long since passed and, as a result, much information has been destroyed inadvertently or on purpose. However, concerted action now and in the near future can preserve what is left or at least allow us to take advantage of data threatened with destruction. It is hoped that this document will serve as a spur to others to begin the long and difficult task before it is too late and all we have are concrete and lost opportunities.

Notes:

Survey is over 30 years old; a survey update is recommended.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: BLM Land Management

Author: Kevin A. Rafferty
Division of Anthropological Studies,
Environmental Research Center, University of
Nevada, Las Vegas

Author 4505 S. Maryland Parkway
Contact: Las Vegas, NV 89154

Map Notes: Maps do not clearly depict the survey boundary

City of Las Vegas Historic Resource Reports

Title: Historic Resources of Central Las Vegas, Vol. I, II, III

Type: Historic Resource Survey

Ward: 3,5

Multiple Wards ☒

Date: 1985

Project Year: 1984

Project Area: Downtown Las Vegas; section 34 of Township 20 South, Range 62 East, as well as the eastern quarter of Section 33, and a small portion of Section 36.

Period of Significance: <1935

Description:

In an attempt to identify important historic and cultural resources of central Las Vegas, a survey of the area was conducted during the summer of 1984. The region included the Union Pacific Railroad yards and the sector to the east, encompassing the nucleus of pre-urban Las Vegas. The project focused on buildings built prior to 1935. The Nevada Historical Society conducted the investigation with funding provided by the Nevada Division of Historic Preservation and Archeology.

Findings:

The survey resulted in the 1984 National Register Nomination of the multiple resource area of Central Las Vegas, incorporating most of section 34 of Township 20 South, Range 61 East, as well as the eastern quarter of section 33, and a small portion of section 35. The total area is approximately 795 acres. The area encompasses structures quite significant for their associations with the origins of Las Vegas as a railroad town. It also contains facilities which were a part of the community's early maturing phase during the late 1920's and early 1930's. The nomination was ultimately denied. During 1985 a second phase of this project was undertaken. The initial survey document was duplicated for distribution to various agencies throughout the Las Vegas area and the state. Five National Register nominations were prepared for various properties; Las Vegas High School, the Fifth Street School, Las Vegas Hospital, the S.R. Whitehead House, and a thematic group nomination for properties relating to the early development of Las Vegas as a railroad town. This phase was carried out by Frank Wright of the Nevada State Museum and Historical Society under the direction of Peter Bandurraga of the Nevada Historical Society in Reno. The Las Vegas High School nomination was prepared by the staff of the Nevada Division of Historic Preservation and Archeology. Research assistance was provided by Dorothy Wright and James R. Hinds and mapping was completed by Keith Myhrer. The thematic group nomination was prepared by Dorothy Wright.

Notes:

Survey is over 30 years old; a survey update is recommended.

Includes Vol. I and II of the NRHP Nomination for the multiple resource area of Central Las Vegas.

SHPO Report #: A_746

NRIS #: n/a


Federal Agency: n/a

Client: NV Division of Historic Preservation and

Author: Nevada State Museum and Historical Society
Las Vegas (Nevada State Museum Las Vegas)

Author 309 S. Valley View Blvd.
Contact: Las Vegas, NV 89107
(702) 486-5205

Map Notes:

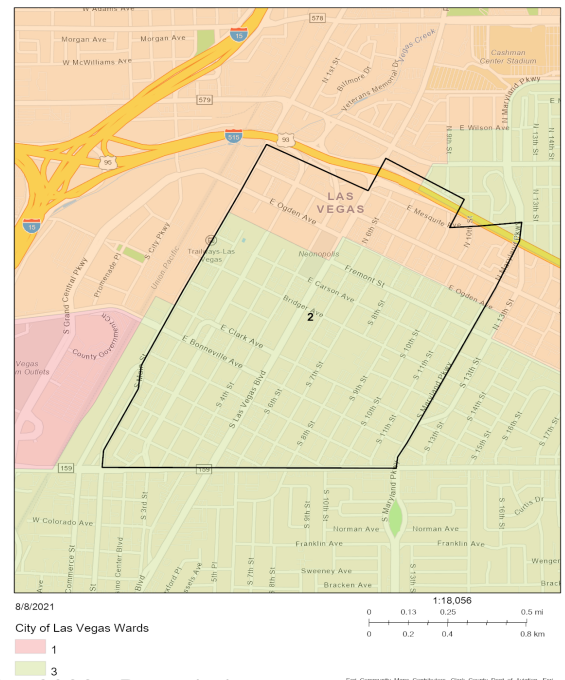

City of Las Vegas Historic Resource Reports

Title: Neon in Nevada: A Survey of Contemporary and Historic Neon Signs in Nevada, Vol. I and II

Type: Historic Resource Survey

Ward: 3,5,paradise

Multiple Wards ☒

Date: 09/01/1986

Project Year: 1986

Project Area: Reno, Sparks, Carson City, Las Vegas, Lovelock, Winnemucca, Battle Mountain, Elko, Wells, Austin, Eureka, Ely, Hawthorne, Tonopah, Laughlin, Boulder City, South Lake Tahoe and Stateline.

Period of Significance: 1900-1980's

Description:

The Neon in Nevada Survey Project intends to research, identify and document important examples of neon signage associated with the continuous development of the twentieth-century Nevada tourism industry. The designation "tourism related" is used to specify signs related to Nevada tourism -- casinos, bars, cafes and restaurants and including hotels and motels. Documentation is intended to include signage which no longer exists, is abandoned, dismantled or in storage, as well as signage currently in place on buildings and structures. The survey will focus on the primary urban centers and suburban communities of Reno, Sparks, Carson City and Las Vegas. Secondly it will target the smaller towns located on major highway routes including Interstate 80 (Lovelock, Winnemucca, Battle Mountain, Elko and Wells) and U.S. Highway 50 (Austin, Eureka and Ely). Thirdly it will survey the Nevada highway towns of Hawthorne and Tonopah as well as the border towns of Laughlin, Boulder City, South Lake Tahoe and Stateline. The border towns are of particular interest because they are destination areas between two states.

Findings:

The primary purpose of this project was to research, identify and document important examples of neon signage in Nevada. To that end over 150 signs were recorded on the inventory forms appended to the back of this report and over 500 slides were taken as documentation. None of the earliest signs, for example the People's Market signs from Elko, could be located. Signs from the 1930s and 40s which are not currently in use have been destroyed. However, several vintage neon signs which are still in use or attached to buildings were located. Many of them are endangered.

Other signs from more recent historical periods were also identified. The signs listed below should be restored and preserved in museum or historical society collections as they meet the criteria for evaluation for the National Register. The signs represent important design trends, have artistic merit, and are associated with events which made a significant contribution to broad patterns of national and/or state history (criteria A). The signs also embody distinctive characteristics of a type, period and/or method of construction (criteria C).

Notes:

Survey is over 30 years old; a survey update is recommended

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: Division of Historic Preservation and Archeology

Author: Chealse H. Miller, Nevada Historical Society

Author Contact: 1650 North Virginia Street
Reno, NV 89503
(775) 688-1191

Map Notes: Most surveyed signs within City limits have been demolished or donated to the Neon Museum

City of Las Vegas Historic Resource Reports

Title: Thematic Nomination of Properties Associated with the San Pedro, Los Angeles, and Salt Lake Railroad National Register of Historic Places Nomination

Type: National Register Nomination **Ward:** 3,5 **Multiple Wards** ☒

Date: 9/29/1986 **Project Year:** 1986

Project Area: Downtown Las Vegas. Refer to the description below for details.

Period of Significance: 1908-1911

Description:

National Register of Historic Places Nomination

Project Area:

Railroad Cottage District: 601-629 South Casino Center Blvd. Las Vegas, NV

Lincoln Hotel: 307 South Main Street, Las Vegas, Nevada

Hanson Hall: 700 Dividen Drive, Las Vegas, NV

The Pacific Fruit Express Company, Ice Plant: 612 South Main St. Las Vegas, Nevada

Findings:

Significant under Criteria A and C: Architecture and Exploration/Settlement

Notes:

Includes the Railroad Cottage Historic District National Register of Historic Places Nomination.

Properties identified in Historic Resources of Central Las Vegas, 1984.

Survey is over 30 years old; a survey update is recommended

SHPO Report #: n/a

NRIS #: 87001622



Federal Agency: n/a

Client:


Author: Nevada State Museum and Historical Society
Las Vegas (Nevada State Museum Las Vegas)

Author Contact: 309 S. Valley View Blvd.
Las Vegas, NV 89107
(702) 486-5205

Map Notes: Hason Hall is located in Ward 5, location #8.
The Railroad Cottage District is outlined as location #7.
The Lincoln Hotel is located in Ward 3, location # 8
The Ice Plan is located in Ward 3, location #9

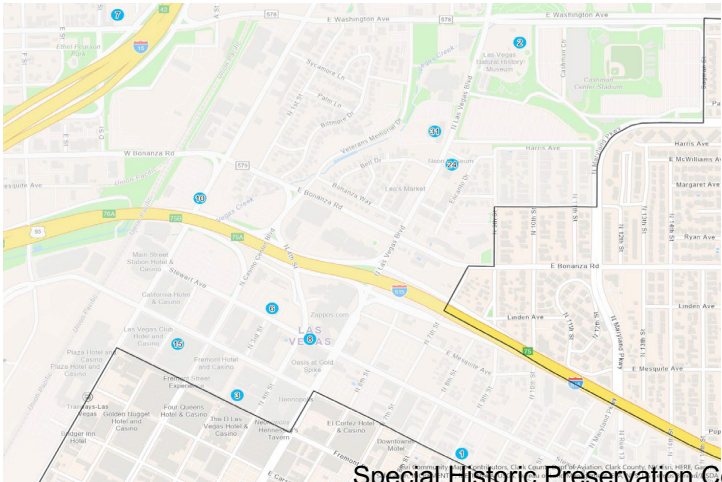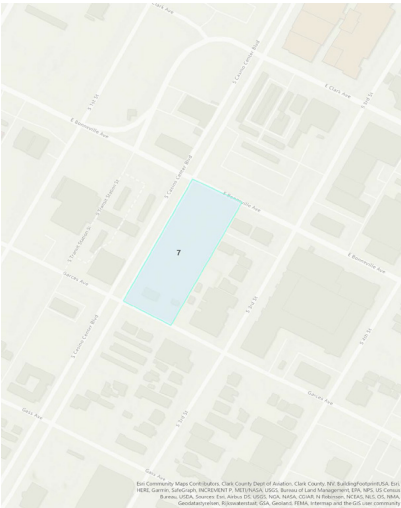

Ward 5 Map

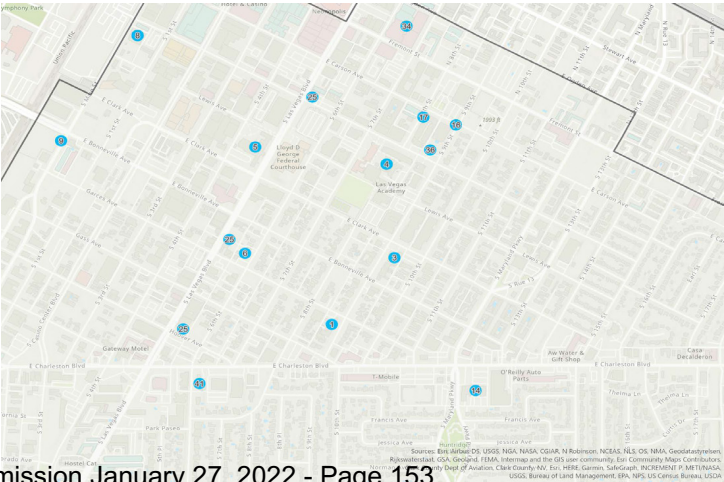

Ward 3 Map

City of Las Vegas Historic Resource Reports

Title: Equestrian Facilities Master Plan, Floyd Lamb Park

Type: Other

Ward: 4,5,6

Multiple Wards ☒

Date: 1991

Project Year: 1991

Project Area: Northwest Study Area: bounded on the south by Cheyenne Avenue, on the north by Moccasin Drive, on the east by Decatur Blvd., and on the west by Hualapai Way.

Period of Significance: n/a

Description:

The major urban design issue of this Northwest plan is preserving the low density residential, rural/equestrian lifestyle and visual image which has been established throughout large sections of the Northwest Vegas area. Urban design considerations include not only proper land use transitions, but also physical buffering. This includes landscaping and programs to eliminate and prevent visual clutter and debris in fragile desert areas.

Findings:

n/a

Notes:

Master plan study, not a historic resource report.

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: Las Vegas Equestrian Events


Author: The Moffitt Partnership, Architects and Constructors

No contact information available

Author

Contact:

Map Notes:

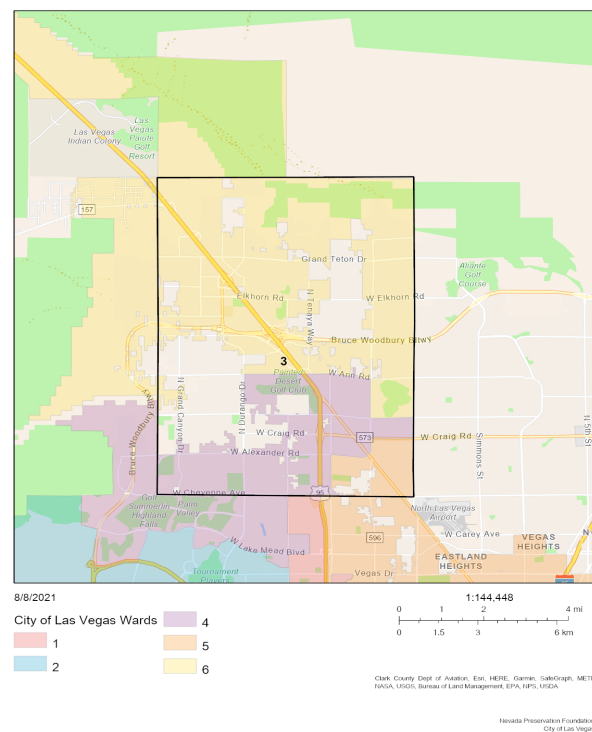

City of Las Vegas Historic Resource Reports

Title: Old Spanish Trail/Mormon Road Historic District National Register of Historic Places Nomination

Type: National Register Nomination

Ward: 1,2,3,5

Multiple Wards ☒

Date: 4/1/2001

Project Year: 2001

Project Area: From California border to Arizona across southern Nevada, through Las Vegas

Period of Significance: 1844 - 1857

Description:

National Register of Historic Places Nomination

Findings:

Significant under Criteria A and D: Transportation, Exploration/Settlement, and Archeology/History

Notes:

SHPO Report #: n/a

NRIS #: 1000863

Federal Agency: n/a

Client: n/a

Author: NV SHPO and Bureau of Land Management
Las Vegas Field Office

Author Contact: 4701 North Torrey Pines Dr. Las Vegas, NV
89130
E-mail: blm_nv_sndr_web_mail@blm.gov
Phone: 702-515-5000

Map Notes: Map not available

City of Las Vegas Historic Resource Reports

Title: Downtown Las Vegas: Historic Resource Survey and Inventory

Type: Historic Resource Survey

Ward: 3,5

Multiple Wards ☒

Date: 9/1/2002

Project Year: 2002

Project Area: Survey area is roughly Bonanza Avenue and Charleston Boulevard to the north and south, respectively, and First Street and Maryland Parkway to the west and east, respectively.

Period of Significance: <1958

Description:

20th Century Preservation conducted a historic resource survey of a selected area of downtown Las Vegas to formally inventory and document the existing historic properties. The results of this Reconnaissance Level survey will be used by the Planning and Development Department, as well as the Neighborhood Services Department as a preservation planning tool during future revitalization and development efforts for this historically rich area. The survey boundaries include several historic subdivisions, including Clark's Las Vegas Townsite, the South, Hawkins, Ladds, Grandview, Pioneer Heights, and Wardie Additions, Buck's Subdivision, and the Fairview Tract.

Findings:

As a result of this survey, it is strongly believed that great historic strength of the city of Las Vegas lies in the pockets of untouched residential areas, specifically those blocks located north of Fremont Street and south of Bonanza Avenue. These neighborhoods, located primarily in the Grand View Addition, Bucks Subdivision, and Fairview Tract should be considered for further study and possible historic district nomination to the National Register of Historic Places as physical manifestations of local and national trends in architectural style and planned neighborhood development, as well as representations of development influenced by the local economic booms. In addition, for many of the same reasons, it is recommended that the motor court hotels of Fremont Street, located east of Las Vegas Boulevard, be selected for further study and possible recommendation as a historic district to the National Register of Historic Places.

Of a total 301 surveyed buildings, thirty (30) were determined to be eligible for nomination to the National Register of Historic Places. Determinations of eligibility were typically based on architectural integrity, as well as association with local/national trends as best could be derived from style and location. Recommendations for further study are located in the Introduction section of the Historic Resource Survey and Inventory report, page 6.

Notes:

Survey is 20 years old; a survey update is recommended.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: n/a

Client: City of Las Vegas

Author: Mooney, Courtney (20th Century Preservation)

Author Contact: 1608 Houssels Ave.
Las Vegas, NV 89104
(702) 858-3885

Map Notes:

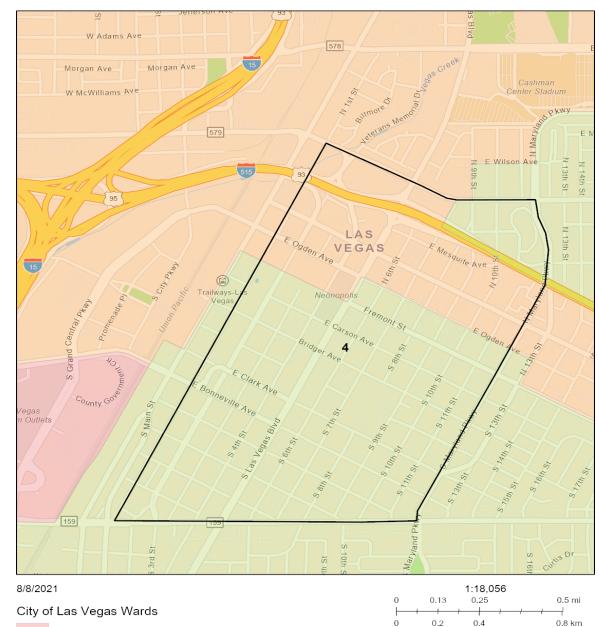

City of Las Vegas Historic Resource Reports

Title: The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County, Nevada
- Binder 1-3

Type: Section 106 Review

Ward: 3,5, paradise

Multiple Wards ☒

Date: 11/1/2002

Project Year: 2001-2002

Project Area: Two APE were determined based on the route of the fixed guideway project. The first APE is roughly bounded by Stewart Ave, Casino Center Blvd., Main St., and Sahara Ave. The second APE is roughly bounded by Desert Inn Road, Las Vegas Blvd., and Paradise Road, forming a triangular area.

Period of Significance: <1960

Description:

This study of historic structures is one of a series of technical reports detailing the potential impacts in the Area of Potential Effect (APE) of the proposed fixed guideway project. The overall objective of this report is to assess the potential impacts to historic buildings by the proposed transportation project within the APE. As this project is likely to have a component of federal funding, or a federal nexus, it is part of the Section 106 process to assess impacts to historic properties.

Findings:

Based on recommendations in the report, a total of 263 properties in the APE were evaluated for eligibility for listing in the National Register of Historic Places. Of the total, 67 were listed in or determined eligible for the National Register. Of the 67 properties, 28 are individually eligible buildings, 31 are contributing buildings in the Paradise Village Historic District, 6 are contributing buildings in the Gass Avenue Historic District, and 2 are neon signs evaluated as objects. An additional 118 properties in the Paradise Village district are unevaluated, because they fall outside of the APE. These unevaluated properties are not included in the total number of evaluated properties within the APE.

Notes:

Project is almost 20 years old; an updated study is recommended.

Scans of Binder 1 and 2 have been requested to SHPO.

SHPO Report #: A_734,

NRIS #: n/a


Federal Agency: FTA

Client: RTC

Author: Knight & Leavitt Associates, Inc.

Author Contact: 4105 Wagon Trail Ave
Las Vegas, NV, 89118-4426
United States
(702) 897-2628
office@klaenv.com

Map Notes:

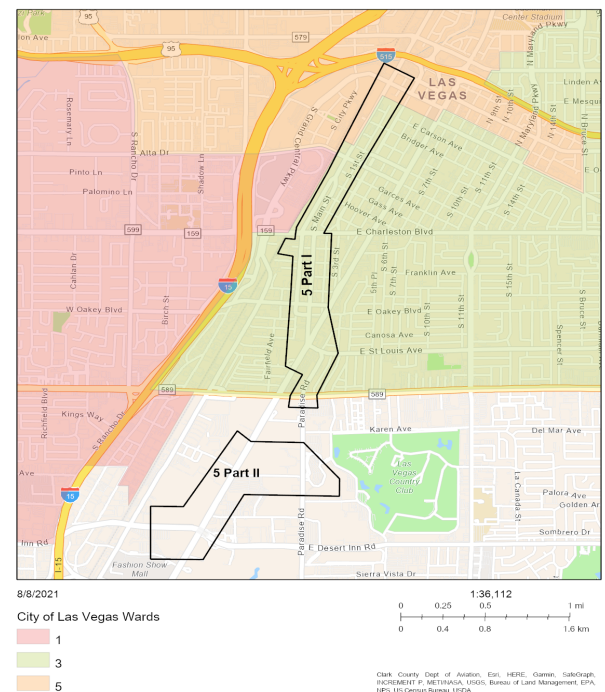

City of Las Vegas Historic Resource Reports

Title: The Historic Properties Survey Fixed Guideway Project Area of Effect, Clark County, Nevada
- Binder 4 of 4

Type: Other **Ward:** 3,5

Date: 8/23/2002 **Project Year:** 2002

Project Area: Main St. between Stewart Ave and Las Vegas, Blvd. Paradise Ave between Las Vegas Blvd. and Sahara Ave.

Period of Significance: n/a

Description:

Rendering and project plans for an extension of the fixed guideway project into Downtown Las Vegas.

Findings:

n/a

Notes:

Not a historic resource document.

SHPO Report #: A_737

NRIS #: n/a


Federal Agency: FTA

Client: RTC

Author: Knight & Leavitt Associates, Inc.

Author Contact: 4105 Wagon Trail Ave
Las Vegas, NV, 89118-4426
United States
(702) 897-2628
office@klaenv.com

Map Notes:

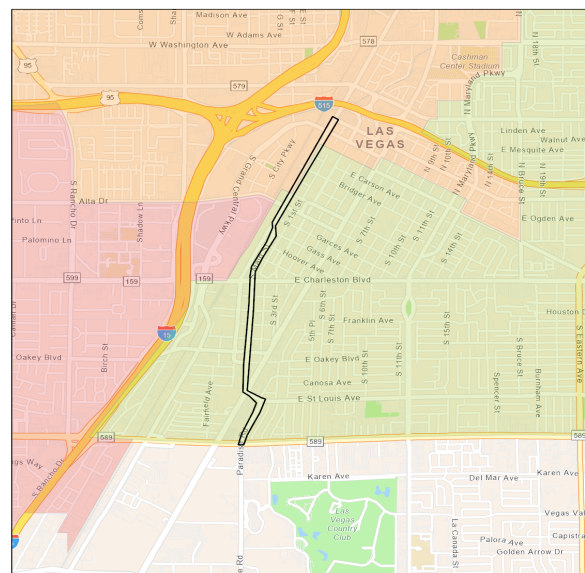

8/8/2021
City of Las Vegas Wards
1
3
5

1:36,112
0 0.25 0.5 1 mi
0 0.4 0.8 1.6 km

Clark County Dept. of Aviation, Envt. HERE, Garmin, Satellogic, INCORPORATED, METRACOR, UNIGIS, Bureau of Land Management, EPA, NPS, US Census Bureau, UNIGIS

Nevada Preservation Foundation
City of Las Vegas

City of Las Vegas Historic Resource Reports

Title: The Historic Properties Survey Fixed Guideway Project Area of Effect, Las Vegas, Clark County, Nevada - Photographs (3 Binders)

Type: Image/Photo

Ward: 3,5

Multiple Words ☒

Date: 2/1/2002

Project Year: 2002

Project Area: Refer to the description below

Period of Significance: <1960

Description:

Photo scans of survey area. Refer to SHPO report no. A734 for the formal report.

Photographed location include:

Binder 1 - South 1st St. , Fremont St., Gass Ave., S. Las Vegas Blvd., Lewis Ave.

Binder 2 - Bonneville Ave., W. California St. , S. Casino Center Blvd., Commerce St. , W. Charleston Blvd., E. Charleston Blvd., Clark Ave., E. Colorado Ave

Binder 3 - S. Main St., E. Oakey Blvd., Santa Clara Dr., Utah Ave., E. Wyoming Ave.

Findings:

n/a

Notes:

Historic Resource Forms are not scanned. The NV SHPO has copies. Survey is 20 years old; a survey update is recommended.

Reference SHPO Report No. A_734 for the project findings.

SHPO Report #: A_743,

NRIS #: n/a


Federal Agency: FTA

Client: RTC

Author: Knight & Leavitt Associates, Inc.

Author 4105 Wagon Trail Ave
Contact: Las Vegas, NV, 89118-4426
United States
(702) 897-2628
office@klaenv.com

Map Notes: All photographed locations are located within survey area 1

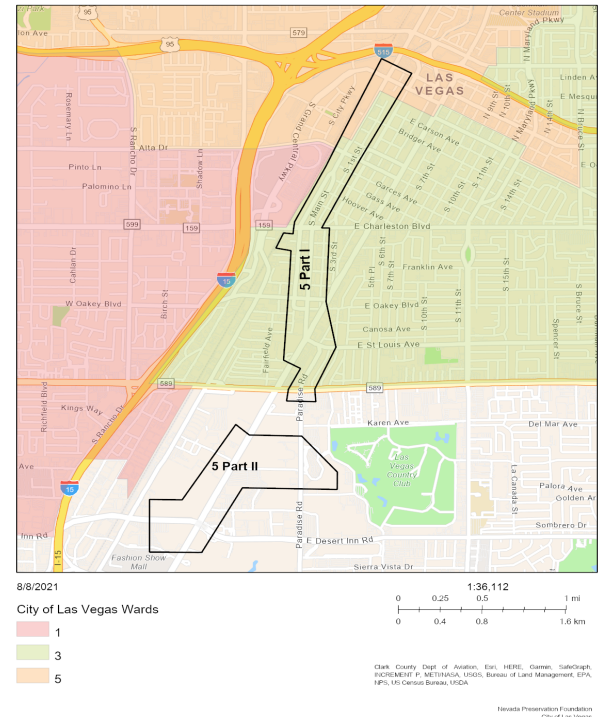

City of Las Vegas Historic Resource Reports

Title: An Architectural Assessment of 93 Linear Miles of Alley and Roadway Shoulder Improvements, Las Vegas, Clark County, Nevada - Volume 2 - (Cultural Resource Division Clearance Report No. 454b (N))

Type: Section 106 Review **Ward:** 1,2,3,4,5,6, paradise **Multiple Wards** ☒

Date: 7/17/2003 **Project Year:** 2003

Project Area: The APE is roughly bounded by Floyd Lamb State Park to the north, Flamingo Blvd. to the south, Hualapai Way to the west, and Nellis Blvd. to the east, in an L-shape form.

Period of Significance: <1964

Description:

The Cultural Resource Division of the Louis Berger Group, Inc. (Berger), in conjunction with Ryden Architects (Ryden), conducted an historical architectural assessment of 93 linear miles of alley and roadway shoulder improvements located in Las Vegas, Clark County, Nevada. The survey was conducted on June 3 thru 6, and June 9 thru 11, 2003. The scope of work for this assessment was to identify historic architectural features and structures located within the project area and assess potential impacts to such resources from the proposed undertaking. The project area consists of the shoulders of alleys and roads throughout Las Vegas, Nevada.

Findings:

The Area of Potential Effect (A.P.E.) was determined to be the actual footprint of the shoulder improvement project. Archival research indicated that no cultural resources were previously recorded within the project area. The latest listings of the National Register of Historic Places (NRHP) were consulted, and no sites or properties listed on, nor nominated to, the National Register are located within the project area. However, background research, including a review of the Clark County Records and research at the Harry Reid Center, identified 2,393 historic properties, and 21 previously recorded archaeological sites within one quarter mile of the project area.

No historic features or structures were identified during this historic architectural assessment. Since no eligible historic features or structures were identified during the historic architectural field survey, it is recommended that this project will have no effect to historic properties.

Notes:

Volume 1 not included.

Contents not scanned: parts of document, maps, drawings, renderings, two appendices (approx. 500 pages). No resource forms available. Contact SHPO for copies.

Project is 20 years old; an updated study is recommended

SHPO Report #: A_742

NRIS #: n/a


Federal Agency: NDOT

Client: CH2MHill, Inc.

Author: The Cultural Resource Division, The Louis Berger Group, Inc. (Acquired by SWP)

Author Contact: SWP Las Vegas
3753 Howard Hughes Parkway,
Suite 135
Las Vegas, NV 89169
United States
TEL: +1 (702) 697-8100

Map Notes:

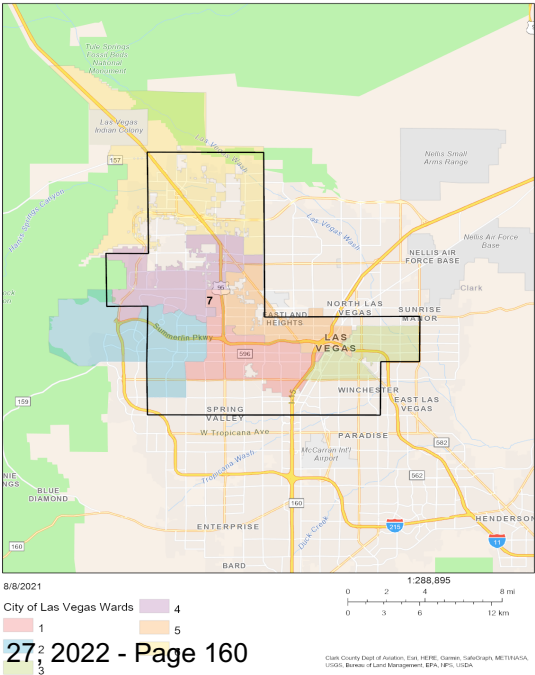

City of Las Vegas Historic Resource Reports

Title: Fremont Street Entertainment District: Windshield Survey for Historic Resources

Type: Historic Resource Survey

Ward: 3,5

Multiple Wards ☒

Date: 09/17/2003

Project Year: 2003

Project Area: Survey area 1: Las Vegas Blvd., Carson Ave, 8th St., and Ogden Ave.

Survey area 2: Fremont St. between 9th and Eastern Ave.

Period of Significance: <1953

Description:

Windshield survey of properties on Fremont St. in Downtown Las Vegas, NV. Includes maps, photo documentation, and HRIF's for those surveyed properties.

Findings:

Recommendations based on survey findings:

1. Only a few properties along Fremont St. would be eligible for National Register Nomination. For those located between Las Vegas Blvd. and Seventh St. significance would be based on the historic business district of Las Vegas. The El Cortez Hotel would be a separate nomination with significance based on association with historic events, well-known architect, and design.
2. Historic Conservation overlay for the Fremont Street Entertainment District.
3. The hotel properties along Fremont Street would most likely be eligible for a multiple property nomination with significance based on the motor court design and its relationship to automobile travel and their popularity immediately following the Depression, as well as the historic route to Boulder Dam as Las Vegas was, "The Gateway to Boulder Dam."

Notes:

Survey is 20 years old; a survey update is recommended.

SHPO Report #: n/a


NRIS #: n/a

Federal Agency: n/a

Client: City of Las Vegas

Author: City of Las Vegas

Author Contact: 495 S. Main St.
Las Vegas, NV 89101
Planning Department

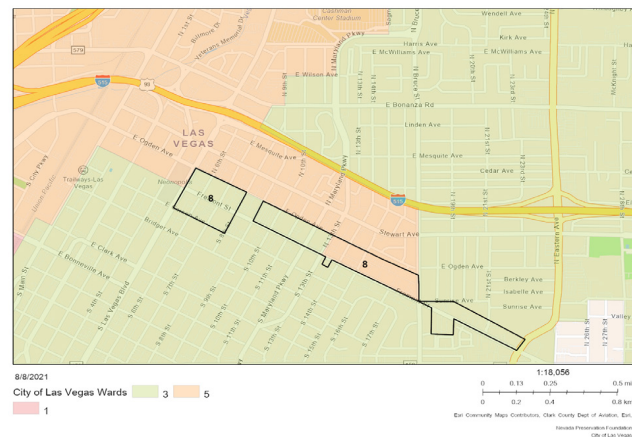

Map Notes:

City of Las Vegas Historic Resource Reports

Title: Las Vegas Blvd. Scenic Byway Corridor Management Plan

Type: Planning/Redevelopment Study

Ward: 3,5

Multiple Words ☒

Date: 2/26/2004

Project Year: 2004

Project Area: Las Vegas Boulevard (State Route 604) from Sahara Avenue to Washington Avenue.

Period of Significance: n/a

Description:

The Las Vegas Boulevard Scenic Byway Corridor Management Plan (CMP) is an overall guiding reference for managing the view corridor of the byway. The goal of the CMP is to preserve, promote and enhance the three intrinsic qualities (scenic, historic, and cultural) that contribute to the scenic essence of the urban byway experience. The end result will be a unique experience for both the tourist and the local community to enjoy this nighttime urban scenic byway.

Findings:

n/a

Notes:

The plan identifies cultural resources within the corridor.

Not a historic resource report

SHPO Report #: n/a

NRIS #: n/a

Federal Agency: n/a

Client: City of Las Vegas

Author: City of Las Vegas

Author Contact: 495 S. Main St.
Las Vegas, NV 89101
702-229-6301

Map Notes:



City of Las Vegas Historic Resource Reports

Title: An Historic Architectural Survey of 20 Miles (2,763.5 Acres) Along I-515 for the Proposed Freeway Improvements Between I-15 and Foothills Drive, Vol. I

Type: Section 106 Review **Ward:** 3, 5, Paradise, **Multiple Wards** ☒

Date: 1/1/2009 **Project Year:** 2005

Project Area: I-515 between I-15 and Foothills Drive

Period of Significance: <1965

Description:

This report presents the results of an historic architectural survey of 20 miles (2,763.5 acres) of state and privately owned land associated with the Interstate-515 (I-515) improvements between J-15 and Foothills Drive grade separation, Clark County, Nevada. The objective of this investigation was to identify existing historic properties and features, and assess potential impacts (both direct and indirect) to such resources from proposed roadway construction improvements. This work was performed on behalf of the Nevada Department of Transportation (NDOT) for the Federal Highway Administration (FHWA).

Findings:

In total, 2,763.5 acres composed the combined Area of Project Effect (APE) and Visual Area of Potential Effect (VAPE), and 243 person-days were spent collecting the field data. Archival research revealed that a total of 88 previous cultural resource surveys had been conducted within a 1-mile radius of the project corridor. These previous surveys recorded a total of 53 cultural sites (both prehistoric and historic) and one historic district within a 1-mile radius of the project corridor. The latest listings of both the State and National Registers of Historic Places were consulted, and two previously recorded historic architectural structures found within the current project area. These two structures are the 1933 U.S. Post Office and Federal Courthouse (located on 301 East Stewart Avenue), and the 1936 Clark Avenue Railroad Underpass (located at Bonanza Road). The Post Office structure was nominated under Criteria A and C, and the Railroad Underpass was nominated under Criterion A. No adverse effects were found to impact these two structures.

Additionally, a total of 13 individually eligible properties and five (5) historic districts were identified during this historic architectural survey. The summary table presents these historic properties and the potential effects of the proposed undertaking.

Notes:

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 6558


NRIS #: n/a

Federal Agency: FHWA

Client: NDOT/FHWA

Author: The Cultural Resource Division, The Louis Berger Group, Inc. (Acquired by SWP)

Author Contact: SWP Las Vegas
3753 Howard Hughes Parkway,
Suite135
Las Vegas, NV 89169
United States
TEL: +1 (702) 697-8100

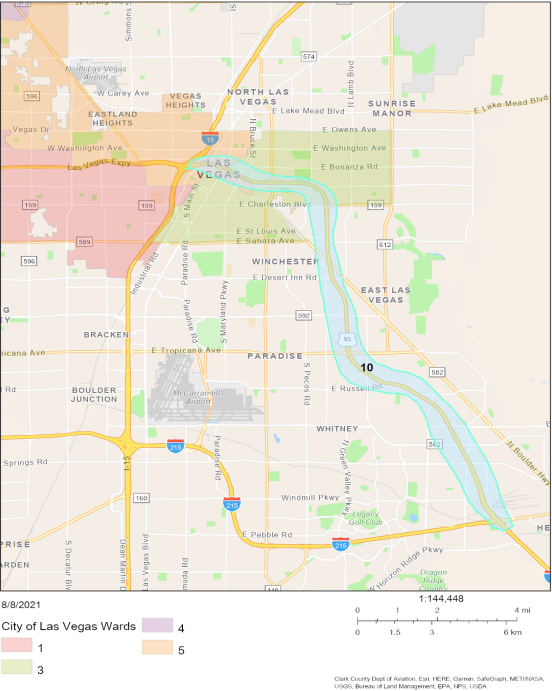

City of Las Vegas Historic Resource Reports

Title: Historic Properties Survey, I-15 Corridor Improvement, U.S. 95 to Apex

Type: Section 106 Review

Ward: 3,5,North Las Vegas

Multiple Wards ☒

Date: 3/1/2006

Project Year: 2005

Project Area: The Area of Potential Effects (APE) incorporated the I-15 corridor from the I-15/US 95 "Spaghetti Bowl" interchange to Apex in northeast Las Vegas.

Period of Significance: <1970

Description:

The Nevada Department of Transportation (NDOT), in cooperation with the Federal Highway Administration (FHWA), is proposing to improve the I-15 corridor from the I-15/US 95 "Spaghetti Bowl" interchange to Apex in northeast Las Vegas. The proposed project is consistent with the recommended transportation strategy identified in the "I-15 Northeast Corridor Study-Detailed Evaluation of Alternatives" released by NDOT in June 2002. The purpose of the proposed project is to relieve congestion and to improve the operational characteristics for the I-15 corridor in response to continued traffic growth in the Las Vegas Valley. This project is considered a federal undertaking and therefore subject to assessment of historical and cultural resources under Section 106 of the National Historic Preservation Act (1966).

Findings:

The execution of this survey resulted in the identification of 494 structures of sufficient age to justify additional evaluation regarding their eligibility for the National Register of Historic Places (NRHP). Of these, only 13 appear to meet the eligibility criteria for the NRHP. All of the other structures, although meeting the temporal criterion for NRHP eligibility, have been heavily modified by the addition of aluminum siding, modern replacement windows, or entire structural units, and so, lack the requisite integrity for actual nomination to the NRHP. The 13 structures deemed potentially eligible for the NRHP are, with the exception of 1308 D Street, all small residential structures that fall into one of three architectural styles: Mission, Pueblo Revival, or Spanish Eclectic. They are all located in an area east of I-15 and centered on Lake Mead Boulevard between Tonopah and Judson Avenues. This survey also afforded an opportunity to revisit several sites already listed in the NRHP. These include the Kiel/Kyle Ranch, the Westside School, the Clark (Bonanza) Avenue

Underpass, and the Moulin Rouge Hotel/Casino.

In assessing the anticipated effects of the proposed project within the APE it is imperative to note that the footprint of the facility will not change. Therefore, any potential impact is limited to view shed alterations. Given the nature of the project, lane expansion and erection/refurbishment of sound walls within the existing right of way, we do not anticipate any adverse effect to any of the historic architecture in the APE.

Notes:

SHPO states the report was not reviewed for Section 106.

Project is over 10 years old; an updated study is recommended.

Appendix C and D (HRIF) are not scanned.

SHPO Report #: 7416

NRIS #: n/a

Federal Agency: FHWA

Client: NDOT

Author: Knight & Leavitt Associates

Author 4105 Wagon Trail Ave
Contact: Las Vegas, NV, 89118-4426
United States
(702) 897-2628
office@klaenv.com

Map Notes: APE map is missing in the report.

City of Las Vegas Historic Resource Reports

Title: Fremont Street Pedestrian Improvements, Las Vegas: Cultural Resources Inventory and Evaluation Report

Type: Section 106 Review

Ward: 3,5

Multiple Wards ☒

Date: 5/1/2006

Project Year: 2006

Project Area: Fremont St. between Las Vegas Blvd. and 8th St.

Period of Significance: 1931-1969

Description:

This Cultural Resources Inventory and Evaluation Report was requested by the City of Las Vegas in conjunction with proposed pedestrian, street and signage improvements on East Fremont Street between Las Vegas Blvd. and Eighth Street in downtown Las Vegas, Nevada. Potential historic resources, consisting of buildings over 40 years of age, were identified by City staff as requiring evaluation to determine historic significance and eligibility for the National Register of Historic Places.

Findings:

Through the survey and inventory process the following three (3) resources were identified as being of potential historic interest: the area of Fremont Street from Las Vegas Blvd. to Seventh Street (district); the Fremont Medical Center at 520 Fremont (building); and El Cortez Hotel and Casino at 600 Fremont (building). These were formally evaluated, using the National Register Criteria for Evaluation, and further evaluated for integrity. Conclusions are that the East Fremont Street District is not eligible for National Register listing, but may be of local interest; and that 520 Fremont Street and 600 Fremont Street are eligible for listing on the National Register of Historic Places.

The SHPO concurs with FHWA's determination of 'No Adverse Effect' for the subject undertaking.

Notes:

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 152

NRIS #: n/a


Federal Agency: n/a

Client: Las Vegas

Author: Painter, Diana (Painter Preservation)

Author Contact: Sonoma Office:
388 Patten Street
Sonoma, CA 95476
E-mail: diana@preservationplans.com
Telephone: (707) 763-6500

Map Notes:

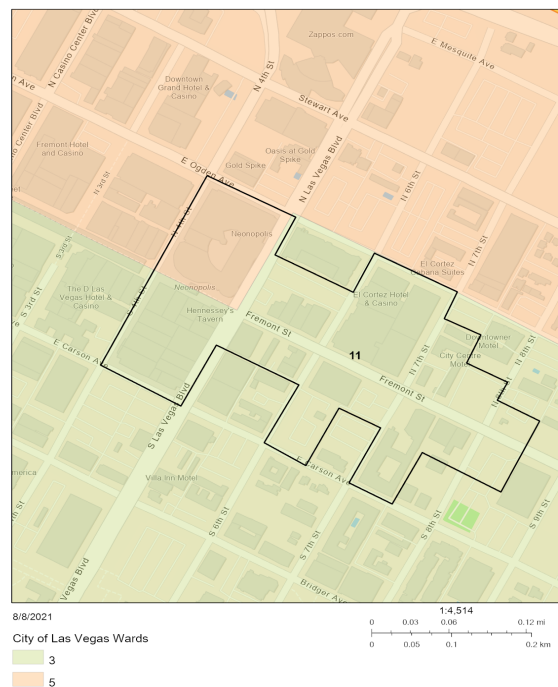

City of Las Vegas Historic Resource Reports

Title: Historical Architectural Survey Report: US 95 Northwest, Washington Avenue to Kyle Canyon Road, Clark County, Nevada

Type: Section 106 Review

Ward: 1,4,5,6

Multiple Words ☒

Date: 4/1/2007

Project Year: 2007

Project Area: US 95 NW, Washington Ave to Kyle Canyon Road

Period of Significance: <1967

Description:

For the proposed US 95 Northwest improvements project, a survey of US 95 in the City of Las Vegas from Washington Avenue to Kyle Canyon Road was evaluated for historic significance. For conformance with Section 106, all properties containing buildings, structures, or objects completed in or prior to 1967 were evaluated for eligibility to the National Register. Local and state research repositories were used to compile the report, and the history of the area was researched.

Findings:

The study resulted in identifying six (6) properties within the proposed project APE constructed in or prior to 1967, none of which were eligible for listing in the National Register.

Notes:

Project is over 10 years old; an updated study is recommended.

SHPO Report #: 729

NRIS #: n/a


Federal Agency: FHWA

Client: NDOT

Author: Parsons

Author: 7450 Arroyo Crossing Parkway, Suite 180
Contact: Las Vegas, Nevada 89113
Direct: +1 702.789.2000

Map Notes:

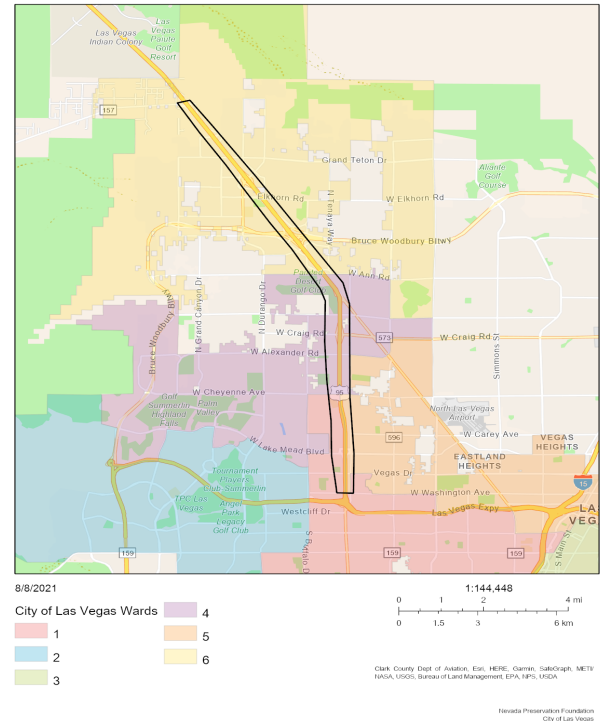

City of Las Vegas Historic Resource Reports

Title: Project Neon: A Historic Architectural Survey of 3.25 Miles (3,016.7 Acres) Along I-15 for Proposed Freeway Improvements Between US 95 and Edna Avenue, Las Vegas, Clark County, Nevada
Ward: 1,3,5
Multiple Wards ☒

Type: Section 106 Review

Date: 03/17/2008
Project Year: 2007

Project Area: I-15, from US 95 to Sahara Ave

Period of Significance: <1965

Description:

The Nevada Department of Transportation (NDOT) and Parsons Engineering, in cooperation with the Federal Highway Administration (FHWA), are proposing to improve I-15 in Las Vegas, Clark County from US 95 to Edna Avenue. The proposed undertaking would include improvements to the I-15 corridor and major street connections beginning south of the I-15 and Sahara Avenue interchange and extending north to the US 95 interchange.

Findings:

The historic architectural survey inventoried 1,261 properties and an additional 193 outbuildings. Of these 1,261 properties, 679 properties are of sufficient age to warrant further study and investigation. Of these 679 historic properties, only 185 properties (not including outbuildings) displayed sufficient integrity, age, and significance to be considered eligible for listing in either the State or National Register of Historic Places (NRHP). Of these 185 properties, none had been previously listed as individual properties in the NRHP. One historic district, the Las Vegas Main Street Historic District, had been nominated on a local level for the NRHP. The Main Street Historic District contains 120 contributing properties (but only 52 of these contributing properties occur within the project's APE), 23 noncontributing properties, and five (5) properties outside the current APE and therefore not evaluated during this inventory. This survey concluded that 14 individual properties are eligible for listing in the NRHP. Added to the 52 contributing Main Street Historic District properties located within the APE, there are a total of 66 properties that display sufficient integrity, age, and significance to be considered eligible for listing in either the State Register or NRHP.

Notes:

At the time this study was conducted, the APE incorporated 370 parcels with build dates of 1965 or older. Many of these properties were very close to the 50 year cut off date. Since Project Neon was not expected to be completed until 2018 or later, NDOT and SHPO did not wish to reevaluate eligibility for all the Project Neon properties that were just on the cusp of turning 50 years old. Because of this, the two agencies agreed that, for the purposes of Section 106, this report would make determinations of eligibility as if the resources were actually 50 years old instead of recommending the properties be reevaluated when they turn 50 years old. The HRIF's note the NRHP eligible threshold for each property. An updated study is recommended to make definitive recommendation.

HRIF's are not included.

SHPO Report #: 5978

NRIS #: n/a


Federal Agency: FHWA

Client: Nevada Department of Transportation

Author: The Cultural Resource Division, The Louis Berger Group, Inc. (Acquired by SWP)

Author Contact: SWP Las Vegas
3753 Howard Hughes Parkway,
Suite 135
Las Vegas, NV 89169
United States
TEL: +1 (702) 697-8100

Map Notes:

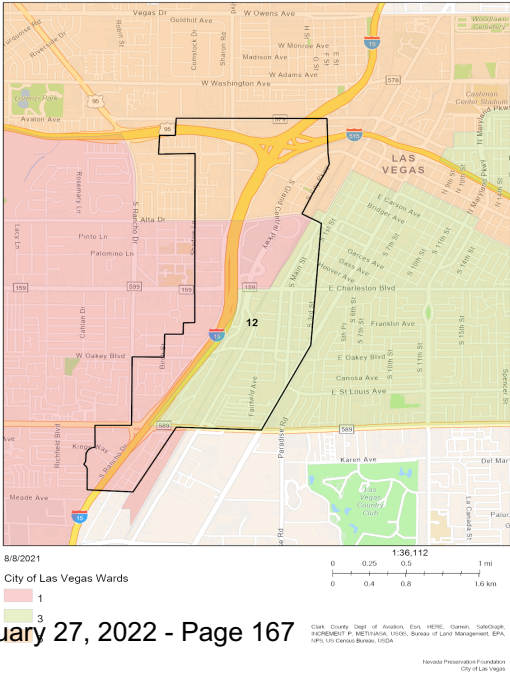

City of Las Vegas Historic Resource Reports

Title: I-15 "Project Neon" from Sirius Ave to W. Bonanza Road

Type: Section 106 Review

Ward: 1,3,5

Multiple Wards ☒

Date: 6/1/2008

Project Year: 2008

Project Area: The APE encompasses parcels adjacent to 1-15 between Sirius Avenue and West Bonanza Road.

Period of Significance: <1965

Description:

The Federal Highway Administration (FHWA) and the Nevada Department of Transportation (NDOT) propose a project to improve Interstate 15 in Las Vegas, Clark County. This architectural inventory report identifies and evaluates historic resources that have been identified in the Area of Potential Effect (APE) for the project. The area of land covered in this report comprises 801 parcels and 706 acres. As a result of the architectural inventory of the 801 parcels, 365 parcels contained buildings that were built during or before 1965. Three-hundred sixty-one (361) Historic Resource Inventory Forms were completed for the buildings on these parcels. The number of parcels is greater than the number of HRIFs because in several cases, one building sprawled over multiple lots.

Findings:

One hundred and five (105) of the properties were determined eligible for listing on the National Register of Historic Places (NRHP). FHWA and NDOT agree the project will have an adverse effect on 26 of the National Register properties and no adverse effect on 13 properties from visual impacts. FHWA proposes to mitigate the effects by salvaging historic building materials, photographic and LiDAR documentation, and controlling design guidelines for redevelopment in historic neighborhoods.

Notes:

Appendix D and E are missing. They are in separate binders.

SHPO Report #: n/a

NRIS #: n/a


Federal Agency: FHWA

Client: NDOT

Author: NDOT

Author Contact: 1263 S. Stewart St.
Carson City, NV 89712
775-888-7771

Map Notes:

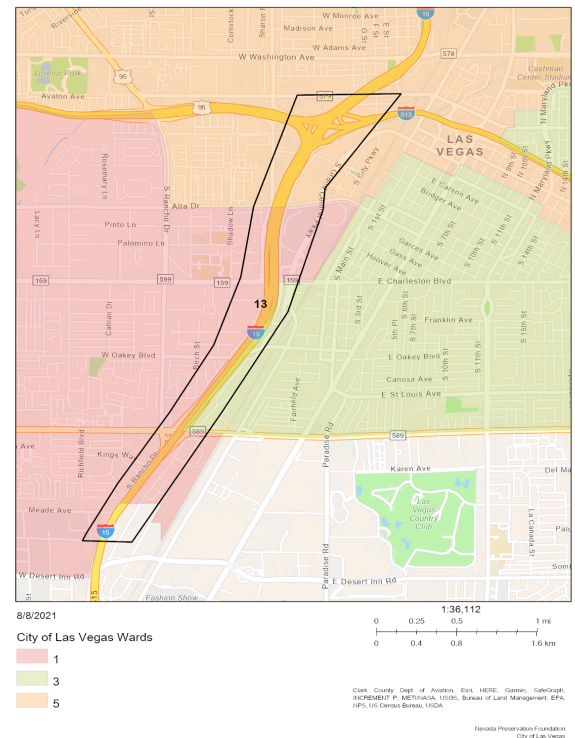

City of Las Vegas Historic Resource Reports

Title: An Architectural Survey and Inventory for the U.S. Vets at the Meadows Housing Project, Las Vegas, Clark County, Nevada

Type: Section 106 Review

Ward: 3,5

Multiple Wards ☒

Date: 8/1/2010

Project Year: 2010

Project Area: The APE is bounded by Interstate Highway 515, Harris Avenue, Veterans Memorial/Casino Center Boulevard, and N. Maryland Parkway.

Period of Significance: <1963

Description:

Cloudbreak Las Vegas, LLC is proposing to develop and construct the U. S. Vets at the Meadows affordable/ transitional housing development in downtown Las Vegas, NV. The project will be funded through U. S. Housing and Urban Development (HUD) HOME Funds, TCAP, tax credits, and private funding. As a partially federally funded project, compliance with Section 106 of the National Historic Preservation Act (16 U.S.C. 470 et seq.) is required. The City of Las Vegas Neighborhood Development Division assumes the responsibility for Section 106 compliance on behalf of HUD.

In June 2010, Randy Bishop of Cloudbreak Las Vegas LLC, accepted the proposal from Kautz Environmental Consultants, to conduct the survey and inventory and evaluate project effects in accordance with 36 CFR 800. This report presents the results of this effort.

Findings:

KEC surveyed a total of 132 properties in the project area. Of these, 17 parcels are vacant, and 24 are less than 50 years of age. A total of 91 parcels contain buildings constructed between 1920 and 1963. In one case, one building straddles two parcels. Of the 90 buildings, 16 are recommended eligible for listing in the National Register of Historic Places, 32 are recommended as contributing elements to the proposed historic district, and 42 are recommended not eligible for listing in the NRHP. One of the properties was left unevaluated because access and visibility were restricted. Fifty years is the NRHP's age standard for eligibility. For the purpose of this report, 1963 is the cut off date. Properties built since 1963 may be considered eligible if they possess exceptional significance, as outlined in Criteria Consideration G. None of the later buildings in the project area meet the criteria for exceptional significance.

Notes:

The study is 11 years old; an updated study is recommended.

SHPO Report #: 6673

NRIS #: n/a

Federal Agency: HUD

Client: City of Las Vegas

Author: Kautz Environmental Consultants, Inc

Author 1140 Financial Blvd. Suite 100
Contact: Reno, Nevada 89502
775.829.4411
admin@kecnv.com

Map Notes:



City of Las Vegas Historic Resource Reports

Title: World War II Era Residential Housing in Las Vegas, Clark County, Nevada (1940-1945)

Type: Historic Context

Ward: 3,5

Multiple Wards ☒

Date: 6/22/2015

Project Year: 2015

Project Area: Eastland Heights, Sebec Acres, Biltmore Bungalows, Beckley Subdivision, Vega Verde, Huntridge Subdivision, Charleston Square, Mayfair Subdivision

Period of Significance: 1940-1945

Description:

The city of Las Vegas Development Services Center requested that Logan Simpson prepare a comprehensive historic context for neighborhoods and subdivisions constructed in suburban Las Vegas during the World War II (W.W.II) era. The context will serve as a planning tool to be used by the Department of Planning, the Historic Preservation Commission, and the Nevada State Historic Preservation Office (SHPO) as part of their continued effort to document and evaluate the eligibility of neighborhoods within the city for inclusion in the National Register of Historic Places (NRHP).

Findings:

Three Title VI neighborhoods have been previously identified through survey in the city and include the Huntridge, Biltmore, and Mayfair Neighborhoods. The Vega Verde subdivision was also previously identified as a FHA Title II development by the city during preparation of a NRHP nomination for the John S. Park Neighborhood. Logan Simpson identified four additional neighborhoods through archival research, all of which are examples of "built-on-demand" or custom subdivisions developed by private investors during the W.W.II era. These neighborhoods include the Beckley Subdivision (1941), Sebec Acres (1941), Eastland Heights (1942), and Charleston Square (1945).

Notes:

SHPO Report #: n/a


NRIS #: n/a

Federal Agency: n/a


Client: City of Las Vegas

Author: Logan Simpson Design, Inc.

Author Contact: 5470 Kietzke Lane, Suite 362
Reno, Nevada 89511
phone: (775) 393-3293
fax: (775) 393-3001

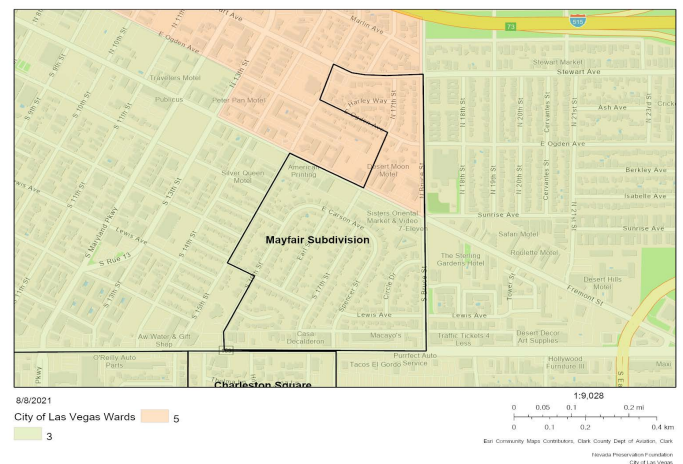




Map Notes: Additional maps on following page

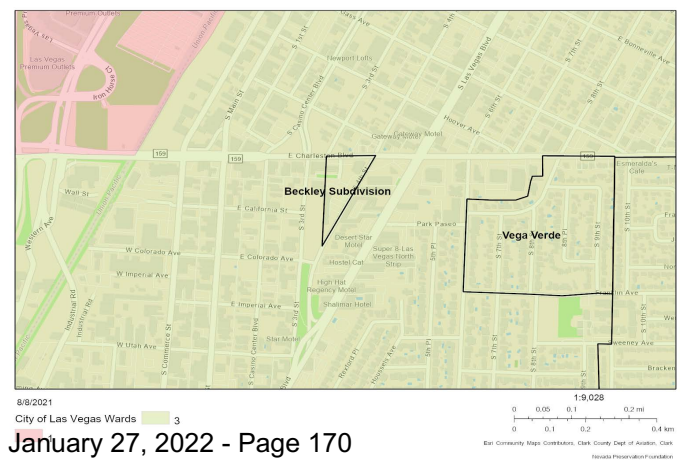

City of Las Vegas Historic Resource Reports

Title: World War II Era Residential Housing in Las Vegas, Clark County, Nevada (1940-1945)

Map Notes:

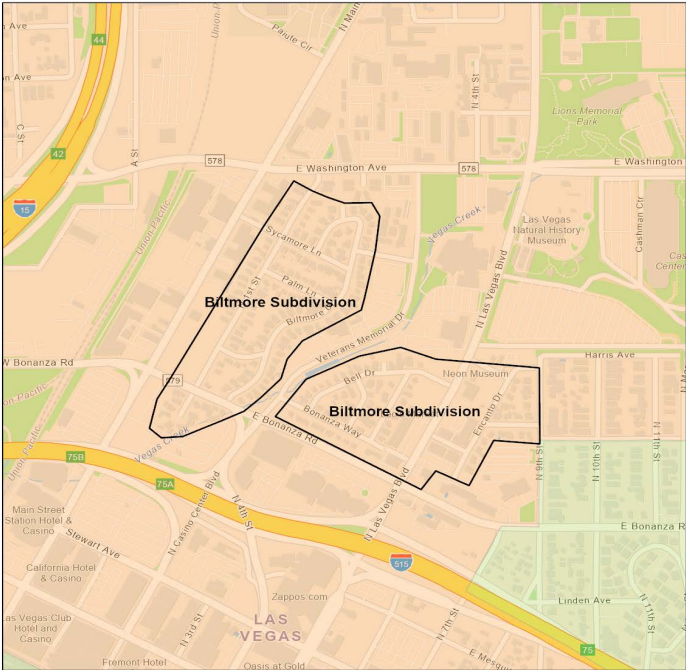

City of Las Vegas Historic Resource Reports

Title: Intensive Level Architectural Survey of Motor Court Motels along Las Vegas Boulevard and Fremont Street

Type: Historic Resource Survey **Ward:** 3, 5 **Multiple Wards** ☒

Date: 4/23/2020 **Project Year:** 2020

Project Area: The survey area is generally bounded by Las Vegas Boulevard on the west, US 95 on the north, Eastern Avenue on the east and Carson Avenue on the south.

Period of Significance: 1926-1965

Description:

The City of Las Vegas Department of Planning, on behalf of the Historic Preservation Commission, requested that North Wind Resource Consulting, LLC (North Wind) conduct an intensive level survey and inventory of historic-age motor court motel properties located along Las Vegas Boulevard and Fremont Street. The purpose of the survey is to determine eligibility of the resources for the City of Las Vegas Historic Property Register (City HPR) based on criteria included in Las Vegas Zoning Code Title 19.06.090, as well as the National Register of Historic Places (NRHP), based on NRHP criteria.


Findings:

As a result of the survey, 13 properties are recommended eligible for listing in the NRHP and City HPR. Of the 13, all are recommended eligible under Criterion A for their association with automobile tourism and townscape development and city planning in postwar Las Vegas, and five are considered to retain sufficient integrity to also be considered eligible under Criterion C, as outstanding examples of roadside motor court architecture. A historic district within the survey area is not recommended. In addition to the motel properties, a total of 17 historic-age signs are recommended eligible for listing in the City HPR as historic objects. Eleven of the signs are located on Fremont Street, and six are on Las Vegas Boulevard.

Notes:

SHPO Report #: n/a
NRIS #: n/a
Federal Agency: n/a
Client: City of Las Vegas
Author: North Wind Resource Consulting
Author Contact: 2025 N. 3rd Street Suite B260
Phoenix, AZ 85004
Phone: (602) 362-8046

Map Notes:

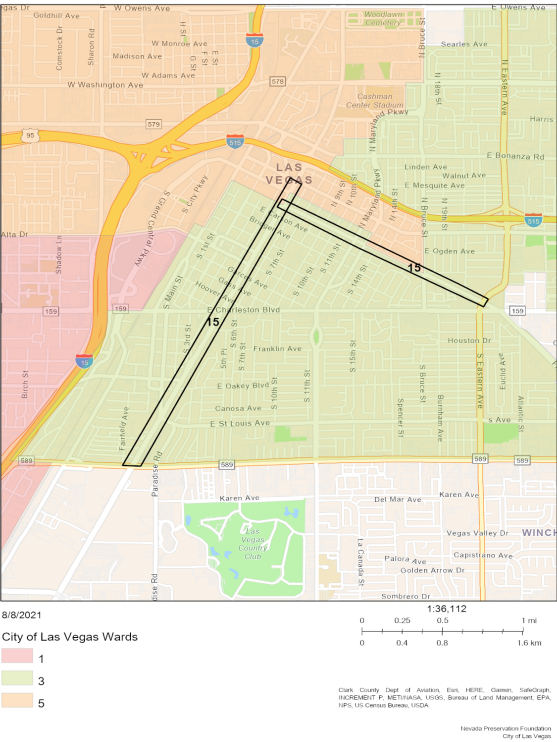

THIS PAGE LEFT INTENTIONALLY BLANK



Appendix

APPENDIX A

National Register of Historic Places - Nevada (eff. November 3, 2020) (Listed alphabetically by County, City, then Resource Name)

Certain sites listed below have been determined as archaeologically or culturally sensitive and their locations are confidential as a condition of the Archaeological Resources Protection Act of 1979. Collecting artifacts from public land without a permit from the managing agency is looting, and is a felony under federal law [43 CFR 7] and a misdemeanor under state law [NRS 383.435]. Looting destroys the ability of archaeologists to research these important places and robs future generations of the opportunity to keep learning about Nevada's past. Please help us preserve important archaeological sites by leaving artifacts where you found them and reporting looting to the appropriate law enforcement officials.

NRIS #	County	City	Name	Address	Date of Listing
92000121	Clark	Goodsprings	Goodsprings Schoolhouse	San Pedro Ave. E of Jct. with Esmeralda St.	1992-08-10
74001142	Clark	Indian Springs	Tim Springs Petroglyphs	Address Restricted	1974-12-16
09000846	Clark	Las Vegas	Berkley Square	Area bounded by Byrnes Ave., D St., Leonard Ave., and G St.	2009-10-23
82003212	Clark	Las Vegas	Brownstone Canyon Archeological District	Address Restricted	1982-09-22
96001561	Clark	Las Vegas	Camp Lee Canyon	NV 156, approximately 50 mi. NW of Las Vegas, Spring Mountains National Recreation Area	1997-01-16
03001509	Clark	Las Vegas	Clark Avenue Railroad Underpass	Jct. of Bonanza Rd. and Union Pacific Railroad Tracks	2004-01-28
75001105	Clark	Las Vegas	Corn Creek Campsite	Address Restricted	1975-08-04
13000010	Clark	Las Vegas	El Cortez Hotel and Casino	600 Fremont St.	2013-02-13
94001575	Clark	Las Vegas	Eureka Locomotive	Address Restricted	1995-01-12
94000552	Clark	Las Vegas	Green Shack	2504 E. Fremont	1994-08-03
10000443	Clark	Las Vegas	Gypsum Cave	Address Restricted	2010-07-08
15000009	Clark	Las Vegas	Harrison's Guest House	1001 F St.	2016-05-03
75001106	Clark	Las Vegas	Hidden Forest Cabin	About 20 mi. N of Las Vegas on Hidden Forest Rd.	1975-08-20
93000686	Clark	Las Vegas	Huntridge Theater	1208 E. Charleston Blvd.	1993-07-22
03000412	Clark	Las Vegas	John S. Park Historic District	Roughly bounded by Charleston Blvd., Las Vegas Blvd., Franklin Ave., and S. Ninth St.	2003-05-16
79001460	Clark	Las Vegas	Las Vegas Grammar School	Washington and D Sts.	1979-04-02
88000549	Clark	Las Vegas	Las Vegas Grammar School	400 Las Vegas Blvd. S	1988-05-20
86002293	Clark	Las Vegas	Las Vegas High School Academic Building and Gymnasium	315 S. Seventh St.	1986-09-24
90002204	Clark	Las Vegas	Las Vegas High School Neighborhood Historic District	Roughly bounded by E. Bridger, S. 9th, E. Gass and S. 6th Sts.	1991-01-30

National Register of Historic Places - Nevada (eff. November 3, 2020)
(Listed alphabetically by County, City, then Resource Name)

Certain sites listed below have been determined as archaeologically or culturally sensitive and their locations are confidential as a condition of the Archaeological Resources Protection Act of 1979. Collecting artifacts from public land without a permit from the managing agency is looting, and is a felony under federal law [43 CFR 7] and a misdemeanor under state law [NRS 383.435]. Looting destroys the ability of archaeologists to research these important places and robs future generations of the opportunity to keep learning about Nevada's past. Please help us preserve important archaeological sites by leaving artifacts where you found them and reporting looting to the appropriate law enforcement officials.

NRS #	County	City	Name	Address	Date of Listing
7200764	Clark	Las Vegas	Las Vegas Mormon Fort	900 Las Vegas Blvd., N.	1972-01-01
78003379	Clark	Las Vegas	Las Vegas Mormon Fort (Boundary Increase)	900 Las Vegas Blvd., N	1978-12-12
78001719	Clark	Las Vegas	Las Vegas Springs	Address Restricted	1978-02-14
92001161	Clark	Las Vegas	Little Church of the West	3960 Las Vegas Blvd. S.	1992-09-14
11001086	Clark	Las Vegas	Morelli House	861 E. Bridger Ave.	2012-06-03
74001143	Clark	Las Vegas	Mormon Well Spring	N of Las Vegas on Mormon Spring	1974-12-24
92001701	Clark	Las Vegas	Moulin Rouge Hotel	900 W. Bonanza Rd.	1992-12-22
74001144	Clark	Las Vegas	Potosi	S of Las Vegas off I-15 near Potosi Pass	1974-12-13
87001622	Clark	Las Vegas	Railroad Cottage Historic District	601--629 S. Casino Center	1987-11-22
76001141	Clark	Las Vegas	Sandstone Ranch	20 mi. SW of Las Vegas	1976-09-02
74001145	Clark	Las Vegas	Sheep Mountain Range Archeological District	Address Restricted	1974-12-31
78001720	Clark	Las Vegas	Sloan Petroglyph Site	Address Restricted	1978-05-19
02000114	Clark	Las Vegas	Sloan Petroglyph Site (Boundary Increase)	Address Restricted	2004-02-05
87000077	Clark	Las Vegas	Smith, Jay Dayton, House	624 S. Sixth St.	1987-02-20
01000863	Clark	Las Vegas	Spanish Trail, Old--Mormon Road Historic District	From California border to Arizona across southern Nevada, through Las Vegas	2001-08-22
79001461	Clark	Las Vegas	Tule Springs Archeological Site	Address Restricted	1979-08-20
81000383	Clark	Las Vegas	Tule Springs Ranch	9200 Tule Springs Rd.	1981-09-23
83001108	Clark	Las Vegas	U.S. Post Office and Courthouse	300 E. Stewart Ave.	1983-02-10
06001060	Clark	Las Vegas	Woodlawn Cemetery	1500 Las Vegas Blvd N	2006-11-21
84000799	Clark	Laughlin	Grapevine Canyon Petroglyphs (A.Z.F.14:98 ASM)	Address Restricted	1984-12-15
99001083	Clark	Laughlin	Spirit Mountain	Address Restricted	1999-09-08
91001527	Clark	Mesquite	Desert Valley Museum	31 W. Mesquite Blvd.	1991-10-24

APPENDIX B

Nevada State Register of Historic Places - Listed Properties (last updated 6-21-2019)

Alphabetical (by County-City-Resource Name)

Certain sites listed below have been determined as archaeologically or culturally sensitive and their locations are confidential as a condition of the Archaeological Resources Protection Act of 1979. Collecting artifacts from public land without a permit from the managing agency is looting, and is a felony under federal law [43 CFR 7] and a misdemeanor under state law [NRS 383.435]. Looting destroys the ability of archaeologists to research these important places and robs future generations of the opportunity to keep learning about Nevada's past. Please help us preserve important archaeological sites by leaving artifacts where you found them and reporting looting to the appropriate law enforcement officials.

SR #	Resource Name	Address	County	City/Town	Listed in NRHP
810010	Brougher Mansion	204 W. Spear St.	Carson City	Carson City	Yes
810011	Carson Brewing Company	102 S. Division St.	Carson City	Carson City	Yes
810012	Carson City Post Office	401 N. Carson St.	Carson City	Carson City	Yes
040132	Carson Hot Springs	1500 Hot Springs Road	Carson City	Carson City	No
150153	Colcord, Gov. Roswell K., House	700 W. Telegraph St.	Carson City	Carson City	Yes
780003	Foreman-Roberts House	1217 N. Carson St.	Carson City	Carson City	Yes
810022	Governor's Mansion	606 Mountain St.	Carson City	Carson City	Yes
810027	Lakeview House	U.S. 395 S of E. Lake Blvd.	Carson City	Carson City	Yes
		Nevada State Railroad Museum	Carson City	Carson City	Yes
050139	McKeen Motor Car #70		Carson City	Carson City	Yes
810014	Meder, Lew, House	308 N. Nevada St.	Carson City	Carson City	Yes
810035	Nevada State Capitol	101 N. Carson St.	Carson City	Carson City	Yes
810036	Nevada State Printing Office	101 S. Fall St.	Carson City	Carson City	Yes
810039	Nye, Governor James W., Mansion	108 N. Minnesota St.	Carson City	Carson City	Yes
810040	Ormsby-Rosser House	304 S. Minnesota St.	Carson City	Carson City	Yes
810043	Rinckel Mansion	102 N. Curry St.	Carson City	Carson City	Yes
810068	Saint Charles-Muller's Hotel	302-304-310 S. Carson St.	Carson City	Carson City	Yes
810048	Sears-Ferris House	311 W. Third St.	Carson City	Carson City	Yes
810054	US Mint at Carson City	600 N. Carson St.	Carson City	Carson City	Yes
810055	V & T Combination Car #21	2180 S. Carson St.	Carson City	Carson City	Yes

SR #	Resource Name	Address	County	City/Town	Listed in NRHP
810056	V&T Loco. (The Dayton & The Inyo)	NE corner of Colorado and Carson Sts.	Carson City	Carson City	Yes
810004	Cold Springs Station Site	51 mi. W of Austin on U.S. 50	Churchill	Austin	Yes
010117	Churchill County Courthouse	10 Williams St.	Churchill	Fallon	Yes
010118	Churchill County Jail	10 W Williams Ave.	Churchill	Fallon	Yes
010114	Douglass, Robert L., House	10 S. Carson St.	Churchill	Fallon	Yes
040130	Fallon City Hall	55 E. Williams Ave.	Churchill	Fallon	Yes
060140	Fallon Federal Building and Post Office	90 N. Maine St.	Churchill	Fallon	Yes
150156	Fallon Theater	71 S. Maine St.	Churchill	Fallon	No
810023	Grimes Point	Address Restricted	Churchill	Fallon	Yes
880091	Harmon School	Jct. Kirm Rd. and Harmon Rd.	Churchill	Fallon	Yes
030123	Holy Trinity Episcopal Church	507 Churchill St.	Churchill	Fallon	Yes
190160	Oats Park Grammar School	167 East Park Street	Churchill	Fallon	Yes
990106	Overland Hotel	125 E. Center St.	Churchill	Fallon	No
810046	Sand Springs Pony Express Station	Address Restricted	Churchill	Fallon	Yes
780004	Cold Springs Pony Express Station Ruins	Address Restricted	Churchill	Frenchman	Yes
040133	Hazen Store	600 Reno Highway	Churchill	Hazen	Yes
810061	Boulder City Hospital	Address Restricted	Clark	Boulder City	No
820074	Boulder Dam Hotel	1305 Arizona St.	Clark	Boulder City	Yes
810066	Old Boulder City Hospital	701 Park Pl.	Clark	Boulder City	Yes
070147	Pioneer Saloon	310 Spring St.	Clark	Goodsprings	No
140152	Harrison House	1001 F. St.	Clark	Las Vegas	Yes
990103	Huntridge Theater	1208 E. Charleston Blvd.	Clark	Las Vegas	Yes
150154	La Concha Motel Lobby	770 N. Las Vegas Boulevard	Clark	Las Vegas	No
810028	Las Vegas Mormon Fort	900 Las Vegas Blvd., N.	Clark	Las Vegas	Yes

SR #	Resource Name	Address	County	City/Town	Listed in NRHP
020119	Las Vegas Post Office and Courthouse	300 E. Stewart Ave.	Clark	Las Vegas	Yes
810029	Las Vegas Springs	Address Restricted	Clark	Las Vegas	Yes
130150	Lorenzi Park	3333 W. Washington Ave.	Clark	Las Vegas	No
010116	Morelli House	861 E. Bridger Ave.	Clark	Las Vegas	Yes
810047	Sandstone Ranch	20 mi. SW of Las Vegas	Clark	Las Vegas	Yes
810050	Sloan Petroglyph Site	Address Restricted	Clark	Las Vegas	Yes
810052	Tule Springs Archeological Site	Address Restricted	Clark	Las Vegas	Yes
810059	Westside School	Washington and D Sts.	Clark	Las Vegas	Yes
990104	Logandale Elementary School	State Highway 169 and West Gann Road	Clark	Logandale	No
020120	LDS Moapa Stake Office Building	161 W. Virginia St.	Clark	Overton	Yes
010115	Overton Gymnasium	N. West Thomas St. W of jct. with S. Anderson St.	Clark	Overton	Yes
040134	St. Thomas Memorial Cemetery	Magnasite Rd. off Moapa Valley Blvd.	Clark	Overton	Yes
130149	Welcome to Fabulous Las Vegas' Sign, The	Las Vegas Blvd., in public right of way, approx. .5 mi. S. of intersection with Russell Rd.	Clark	Paradise Township	Yes
880092	Brown, George, House	1452 Main Street	Douglas	Gardnerville	No
810013	Carson Valley Hospital	1466 U.S. 395	Douglas	Gardnerville	Yes
030122	Gardnerville Branch Jail	1440 Courthouse St.	Douglas	Gardnerville	Yes
940099	Jensen Jr., Arendt, House	1243 A and 1243 B Eddie St.	Douglas	Gardnerville	Yes
180158	Lampe, Wilhelm & William, Ranch	1335 Centerville Lane	Douglas	Gardnerville	Yes
180157	Stodieck, Louis & Elmer, Ranch	1350 Wilhelm Place	Douglas	Gardnerville	No
810019	Genoa Historic District	7 mi. NW of Minden on NV 57	Douglas	Genoa	Yes
040129	Reese-Johnson-Virgin House	193 Genoa Ln.	Douglas	Genoa	Yes

APPENDIX C

Historically Listed Properties City of Las Vegas

September 2021

Historic Properties and Date of Designation				
Name	Location	Local	State	National
Berkley Square Neighborhood Historic District	Area bounded by Byrnes Ave; D St; Leonard Ave; and G St.	9/21/2016	-	10/23/2009
Beverly Green Historic District	Area bounded by S Las Vegas Blvd; E Sahara Ave; E Oakey Blvd; and S 6 th Street	9/21/2016	-	-
Big Springs/Las Vegas Springs Archaeological Site (Springs Preserve)	309 S Valley View Blvd	-	3/4/1981	12/14/1978
Bonanza Underpass	200 W Bonanza Rd	-	-	1/8/2004
El Cortez Hotel and Casino	600 Fremont St	-	-	2/13/2013
Eureka Locomotive	Address Restricted	-	-	1/12/1995
Fifth Street School (Las Vegas Grammar School)	401 S 4 th St	2/19/1992	3/4/1981	5/20/1988
Frank Wait House	901 E Ogden Ave	6/3/1994	-	-
Green Shack*	2504 E. Fremont			6/3/1994
Harrison Boarding House	1001 F St	8/20/2014	6/27/2014	5/3/2016
Helen Toland Residence	1134 Comstock Drive	12/16/2020		
Henderson House	704 S 9 th St	8/20/2006	-	-
Huntridge Theater	1208 E Charleston Blvd	9/1/2021	1/15/1999	7/22/1993
John S. Park Historic District	Roughly bounded by Charleston Blvd; Las Vegas Blvd; Franklin Ave; and S. Ninth St.	3/19/2003	-	5/16/2003
La Concha Motel Lobby	770 N Las Vegas Blvd	8/1/2007	7/19/2015	-
Las Vegas High School Academic Building and Gymnasium	315 S. 7 th Street	4/2/2003	-	9/24/1986
Las Vegas High School Frazier Hall	315 S. 7 th Street	-	-	7/22/2021
Las Vegas High School Neighborhood District	Roughly bounded by E. Bridger; S. 9 th ; E. Gass; and S. 6 th Sts.	-	-	1/30/1991
Las Vegas Old Mormon Fort	500 E Washington Ave	-	3/4/1981	2/1/1972
Lorenzi Park Historic District	730 Twin Lakes Dr	5/20/2009	12/6/2013	-
Mesquite Club	702 E St Louis Ave	5/20/2009	-	-
Morelli House	861 S Bridger Ave	3/8/2007	10/1/2001	6/3/2012
Moulin Rouge Hotel and Casino*	840 W Bonanza Rd	6/17/1992	-	12/22/1992
Railroad Cottage Historic District**	601--629 S. Casino Center	-	-	12/22/1987
Spanish Trail (Mormon Road Historic District)	From California border to Arizona across southern Nevada, through Las Vegas	-	-	8/22/2001

Tule Springs Archaeological Site	Address Restricted	-	3/4/1981	4/10/1979
Tule Springs Ranch (Floyd Lamb Park)	9200 Tule Springs Rd	1/9/2008	-	9/23/1981
U.S. Post Office and Courthouse	300 Stewart Ave	4/2/2003	5/15/2002	2/10/1983
Wengert House	600 E Charleston Blvd	2/17/2016	-	-
Westside School	330 W Washington Ave	5/19/2010	3/4/1981	4/2/1979
Woodlawn Cemetery	1500 N Las Vegas Blvd	8/6/2008	-	11/21/2006

Note

Properties marked with a *no longer exist, having either burned down or been demolished.

Properties marked with a ** are no longer historically listed as they have moved from their original location.

National Scenic Byway	The National Scenic Byways Program is part of the U.S. Department of Transportation, Federal Highway Administration	
Las Vegas Boulevard	Beginning in the north at the Old Mormon Fort (500 E Washington Ave), and ending near the Stratosphere (2000 S. Las Vegas Blvd)	3.4 miles in length

APPENDIX D

Glossary of Terms

- **Adverse Effect (in relation to Section 106 or Section 110 Review):** An adverse effect is found when an undertaking may alter, directly or indirectly, any of the characteristics of a historic property that qualify the property for inclusion in the National Register in a manner that would diminish the integrity of the property's location, design, setting, materials, workmanship, feeling, or association. Adverse effects may include reasonably foreseeable effects caused by the undertaking that may occur later in time, be farther removed in distance or be cumulative.
- **Age Threshold:** The age that a historic resource needs to be in order to qualify for historic designation. The National Park Service has established that a resource fifty (50) years of age or older may be considered for listing on the National Register of Historic Places.

Architectural Resource Assessment (ARA) forms: Survey forms used by the Nevada State Historic Preservation office as a standardized format for documenting Nevada's built environment. They can be used for any local survey and may be required for documenting resources that are affected by a federal undertaking.

- **Area of Potential Effect (APE):** The area of potential effect refers to the geographic area or areas within which a federal undertaking may directly or indirectly cause alterations in the character or use of historic properties, if any such properties exist. The APE is influenced by the scale and nature of an undertaking and may be different for different kinds of effects caused by the undertaking." 36 CFR 800.16(d).
- **Area of Significance:** The importance of a historic property as defined by the National Register criteria in one or more areas of significance. (Refer to Appendix E for a list of designated NHRP Area of Significance)
- **Area of Visual Effect (AVE):** The area of project visibility in a federal undertaking subject to environment impact assessments is referred to as the Area of Visual Effect (AVE). It is determined by the physical constraints of the environment and the physiological limits of human sight. To define the AVE, it is necessary to understand the three types of viewsheds—static, dynamic, and restricted. To describe the AVE, it is necessary to understand landscape units. Also referred to as **Visual Area of Potential Effect (VAPE)**.
- **Bureau of Land Management (BLM):** The Bureau of Land Management is an agency within the United States Department of the Interior responsible for administering federal lands.
- **Community Block Development Grant Funds (CDGB):** The Community Development Block Grant (CDBG) Program provides annual grants on a formula basis to states, cities, and counties

to develop viable urban communities by providing decent housing and a suitable living environment, and by expanding economic opportunities, principally for low- and moderate-income persons. The program is authorized under Title 1 of the Housing and Community Development Act of 1974, Public Law 93-383, as amended 42 U.S.C. 5301 et seq.

- **Contributing Property:** In an historic district, buildings are designated as either contributing or non-contributing. Contributing resources date from the historic period of significance established for the district. They contribute to the significance and character of the district through their historical associations and/or architectural values.
- **Federal Highway Administration (FHWA):** The Federal Highway Administration is a division of the United States Department of Transportation that specializes in highway transportation.
- **Federal Transit Administration (FTA):** The Federal Transit Administration is an agency within the United States Department of Transportation that provides financial and technical assistance to local public transportation systems.
- **Geographic Information System (GIS):** A computer system for capturing, storing, checking, and displaying data related to positions on Earth's surface.
- **Historic Context:** Historic Contexts provide the foundation for preservation planning and survey work by describing the broad patterns of historical development of a community or region that are represented by the physical development and character of the built environment.
- **Historic Preservation Fund (HPF):** The Historic Preservation Fund (HPF) was established in 1977 to provide financial assistance to, originally, states, to carry out activities related to preservation. Funding is provided from Outer Continental Shelf oil lease revenues, not tax dollars, and an amount is appropriated annually by Congress. Awards from the HPF are made to States, Tribes, Territories, local governments, and non-profits. The National Park Service's State, Tribal, Local, Plans & Grants Division manages the programs and grant awards funded by the HPF.
- **Historic Resource Inventory Forms (HRIF):** Prior to the Architectural Resource Assessment (ARA) forms, the Nevada State Historic Preservation office used Historic Resource Inventory Forms (HRIF) as a standardized format for documenting Nevada's built environment.
- **Historic Resource Survey and Inventory:** A historic resource survey and inventory is the process of identifying and gathering data on a community's resources and placing those resources in a historic context. Historic resource surveys lay the groundwork for the identification, evaluation, and registration of properties.

- **Historic Structures Report:** A historic structure report provides documentary, graphic, and physical information about a property's history and existing condition.
- **Individually Eligible Properties:** An historic property individually eligible for nomination to the National Register of Historic Places (NRHP) based on the established criteria for evaluation.
- **Intensive Level Survey:** Architectural surveys fall into two general classifications: intensive and reconnaissance levels. Intensive Level Survey (ILS) and evaluation combines a reconnaissance survey with a deeper evaluation based on archival research. The ILS is a detailed look at a single resource and records in-depth information collected from a physical examination of a building's exterior and sometimes the interior. It also includes research about the building's use and ownership history. Information collected through an ILS provides a solid basis for individual, historic district, and/or multiple property National Register nominations.
- **Local Historic Register:** An official list of historic resources managed by local municipalities with protective ordinances and economic incentives to protect historic resources in a community.
- **Master Plan:** A comprehensive plan, also known as a general plan, master plan or land use plan, is a document designed to guide the future actions of a city or county. The comprehensive plan also presents a vision for the future with long-range goals and objectives for all activities that affect the local government.
- **National Historic Preservation Act (NHPA) of 1966:** Legislation establishing the National Register of Historic Places and extending the national historic preservation programs to properties of State and local significance.
- **National Park Service (NPS):** The National Park Service is an agency of the federal government of the United States that manages all national parks, many national monuments, and other conservation and historical properties with various title designations. The NPS oversees the National Register of Historic Places.
- **National Register Criteria for Evaluation:** The established criteria for evaluating the eligibility of properties for inclusion in the National Register of Historic Places. (Refer to Appendix E for a list of the National Criteria)
- **National Register Information System (NRIS):** Computerized data base of information on properties included in the National Register of Historic Places.
- **National Register Nomination:** A formal nomination of a potential historic resource to the National Register of Historic Places based on the national criteria.

- **National Register of Historic Places (NRHP):** The official federal list of districts, sites, buildings, structures, and objects significant in American history, architecture, archeology, engineering and culture managed by the National Park Service.
- **Historic Resource:** Any building, structure, site, or object that is part of or constitutes a historic property.
- **Nevada Department of Transportation (NDOT):** The Nevada Department of Transportation is a government agency in the U.S. state of Nevada. NDOT is responsible for maintaining and improving Nevada's highway system, which includes U.S. highways and Interstate highways within the state's boundaries.
- **Non-Contributing Property:** In an historic district, buildings are designated as either contributing or non-contributing. Non-contributing resources are those that, due to date of construction, alterations, or other factors, do not contribute to the district's historic significance or character.
- **Period of significance:** The span of time in which a property attained the significance for which it meets the National Register criteria.
- **Reconnaissance Level Survey:** Architectural surveys fall into two general classifications: intensive and reconnaissance levels. The Reconnaissance Level Survey (RLS) is designed as a "first-look" at a broad group of historic resources and records basic information that is collected from the exterior of a building only. Information collected through a RLS is assembled in a final report. Reconnaissance surveys are visual or predictive surveys that identify the general distribution, location and nature of cultural resources within a given area.
- **Section 106 Review:** The Section 106 review process is an integral component of the National Historic Preservation Act (NHPA) of 1966. Section 106 of the NHPA requires that each federal agency identify and assess the effects its actions may have on historic buildings. Under Section 106, each federal agency must consider public views and concerns about historic preservation issues when making final project decisions.
- **Section 110:** Section 110 of the National Historic Preservation Act (NHPA) of 1966 mandates that federal agencies assume responsibility for the preservation of historic properties or resources that fall under the agency's jurisdiction. Additionally, federal agencies must carry out their programs and projects in accordance with the purposes of the NHPA. Congress also added a new provision that directs federal agencies to withhold grants, licenses, approvals, or other assistance to applicants who intentionally, significantly, and adversely affect historic properties.

This provision is designed to prevent applicants from destroying historic properties prior to seeking federal assistance to avoid the section 106 process.

- **State Historic Preservation Office (SHPO):** the official designated by the Governor to administer the State's historic preservation program and the duties described in 36 CFR Part 61 including nominating properties to the National Register of Historic Places.
- **State Historic Register:** An official list kept by the State Historic Preservation Office of places and resources worthy of preservation in that state, following the national register criteria set forth by the National Park Service.
- **Subdivision:** The division of a tract of land into defined lots, either improved or unimproved, which can be separately conveyed by sale or lease, and which can be altered or developed. The process often includes setting aside land for streets, sidewalks, parks, public areas, and other infrastructure needs, including the designation of the location of utilities.
- **Tract:** One or more contiguous lots or parcels of land under the same ownership.
- **United States Department of Housing and Urban Development (HUD):** The Department of Housing and Urban Development is the Federal agency responsible for national policy and programs that address America's housing needs, that improve and develop the Nation's communities, and enforce fair housing laws.
- **University of Nevada Las Vegas (UNLV):** The University of Nevada, Las Vegas is a public land-grant research university in Paradise, Nevada.
- **University of Nevada Reno (UNR):** The University of Nevada, Reno is a public land-grant research university in Reno, Nevada.

NATIONAL REGISTER BULLETIN

Technical information on the the National Register of Historic Places:
survey, evaluation, registration, and preservation of cultural resources



U.S. Department of the Interior
National Park Service
Cultural Resources
National Register, History and Education

How to Apply the National Register Criteria for Evaluation



The mission of the Department of the Interior is to protect and provide access to our Nation's natural and cultural heritage and honor our trust responsibilities to tribes.

The National Park Service preserves unimpaired the natural and cultural resources and values of the National Park System for the enjoyment, education, and inspiration of this and future generations. The Park Service cooperates with partners to extend the benefits of natural and cultural resource conservation and outdoor recreation throughout this country and the world.

This material is partially based upon work conducted under a cooperative agreement with the National Conference of State Historic Preservation Officers and the U.S. Department of the Interior.

Date of publication: 1990; revised 1991, 1995, 1997. Revised for Internet 1995.

Cover

(Top Left) **Criterion B - Frederick Douglass Home**, Washington, D.C. From 1877-1899, this was the home of Frederick Douglass, the former slave who rose to become a prominent author, abolitionist, editor, orator, and diplomat. (Walter Smalling, Jr.)

(Top Right) **Criterion D - Francis Canyon Ruin**, Blanco vicinity, Rio Arriba County, New Mexico. A fortified village site composed of 40 masonry-walled rooms arranged in a cluster of four house blocks. Constructed ca. 1716-1742 for protection against raiding Utes and Comanches, the site has information potential related to Navajo, Pueblo, and Spanish cultures. (Jon Samuelson)

(Bottom Left) **Criterion C - Bridge in Cherrytree Township**, Venango County, Pennsylvania. Built in 1882, this Pratt through truss bridge is significant for engineering as a well preserved example of a type of bridge frequently used in northwestern Pennsylvania in the late 19th century. (Pennsylvania Department of Transportation)

(Bottom Right) **Criterion A - Main Street/Market Square Historic District**, Houston, Harris County, Texas. Until well into the 20th century this district marked the bounds of public and business life in Houston. Constructed between the 1870s and 1920s, the district includes Houston's municipal and county buildings, and served as the city's wholesale, retail, and financial center. (Paul Hester)

II. THE NATIONAL REGISTER CRITERIA FOR EVALUATION

CRITERIA FOR EVALUATION:³

The quality of significance in American history, architecture, archeology, engineering, and culture is present in districts, sites, buildings, structures, and objects that possess integrity of location, design, setting, materials, workmanship, feeling, and association, and:

- A. That are associated with events that have made a significant contribution to the broad patterns of our history; or
- B. That are associated with the lives of persons significant in our past; or
- C. That embody the distinctive characteristics of a type, period, or method of construction, or that represent the work of a master, or that possess high artistic values, or that represent a significant and distinguishable entity whose components may lack individual distinction; or
- D. That have yielded, or may be likely to yield, information important in prehistory or history.

CRITERIA CONSIDERATIONS:

Ordinarily cemeteries, birthplaces, or graves of historical figures, properties owned by religious institutions or used for religious purposes, structures that have been moved from their original locations, reconstructed historic buildings, properties primarily commemorative in nature, and properties that have achieved significance within the past 50 years shall not be considered eligible for the National Register. However, such properties *will qualify* if they are integral parts of districts that do meet the criteria or if they fall within the following categories:

- a. A religious property deriving primary significance from architectural or artistic distinction or historical importance; or
- b. A building or structure removed from its original location but which is significant primarily for architectural value, or which is the surviving structure most importantly associated with a historic person or event; or

- c. A birthplace or grave of a historical figure of outstanding importance if there is no appropriate site or building directly associated with his or her productive life; or
- d. A cemetery which derives its primary significance from graves of persons of transcendent importance, from age, from distinctive design features, or from association with historic events; or
- e. A reconstructed building when accurately executed in a suitable environment and presented in a dignified manner as part of a restoration master plan, and when no other building or structure with the same association has survived; or
- f. A property primarily commemorative in intent if design, age, tradition, or symbolic value has invested it with its own exceptional significance; or
- g. A property achieving significance within the past 50 years if it is of exceptional importance.

³The Criteria for Evaluation are found in the *Code of Federal Regulations, Title 36, Part 60*, and are reprinted here in full.

V. HOW TO EVALUATE A PROPERTY WITHIN ITS HISTORIC CONTEXT

UNDERSTANDING HISTORIC CONTEXTS

To qualify for the National Register, a property must be significant; that is, it must represent a significant part of the history, architecture, archeology, engineering, or culture of an area, and it must have the characteristics that make it a good representative of properties associated with that aspect of the past. This section explains how to evaluate a property within its historic context.

The significance of a historic property can be judged and explained only when it is evaluated within its historic context. Historic contexts are those patterns or trends in history by which a specific occurrence, property, or site is understood and its meaning (and ultimately its significance) within history or prehistory is made clear. Historians, architectural historians, folklorists, archeologists, and anthropologists use different words to describe this phenomena such as trend, pattern, theme, or cultural affiliation, but ultimately the concept is the same.

The concept of historic context is not a new one; it has been fundamental to the study of history since the 18th century and, arguably, earlier than that. Its core premise is that resources, properties, or happenings in history do not occur in a vacuum but rather are part of larger trends or patterns.

In order to decide whether a property is significant within its historic context, the following five things must be determined:

- The facet of prehistory or history of the local area, State, or the nation that the property represents;
- Whether that facet of prehistory or history is significant;
- Whether it is a type of property that has relevance and importance in illustrating the historic context;
- How the property illustrates that history; and finally
- Whether the property possesses the physical features necessary to convey the aspect of prehistory or history with which it is associated.

These five steps are discussed in detail below. If the property being evaluated does represent an important aspect of the area's history or prehistory *and* possesses the requisite quality of integrity, then it qualifies for the National Register.

HOW TO EVALUATE A PROPERTY WITHIN ITS HISTORIC CONTEXT

Identify what the property represents: the theme(s), geographical limits, and chronological period that provide a perspective from which to evaluate the property's significance.

Historic contexts are historical patterns that can be identified through consideration of the history of the property and the history of the surrounding area. Historic contexts may have already been defined in your area by the State historic preservation office, Federal agencies, or local governments. In accordance with the National Register Criteria, the historic context may relate to one of the following:

- An event, a series of events or activities, or patterns of an area's development (Criterion A);
- Association with the life of an important person (Criterion B);
- A building form, architectural style, engineering technique, or artistic values, based on a stage of physical development, or the use of a material or method of construction that shaped the historic identity of an area (Criterion C); or
- A research topic (Criterion D).

⁴ For a complete discussion of historic contexts, see *National Register Bulletin: Guidelines for Completing National Register of Historic Places Registration Forms*.

Determine how the theme of the context is significant in the history of the local area, the State, or the nation.

A theme is a means of organizing properties into coherent patterns based on elements such as environment, social/ethnic groups, transportation networks, technology, or political developments that have influenced the development of an area during one or more periods of prehistory or history. A theme is considered significant if it can be demonstrated, through scholarly research, to be important in American history. Many significant themes can be found in the following list of Areas of Significance used by the National Register.

AREAS OF SIGNIFICANCE

Agriculture
Architecture
Archeology
 Prehistoric
 Historic—Aboriginal
 Historic—Non-Aboriginal
Art
Commerce
Communications
Community Planning and Development
Conservation
Economics
Education
Engineering
Entertainment/Recreation
Ethnic Heritage
 Asian
 Black
 European
 Hispanic
 Native American
 Pacific Islander
 Other
Exploration/Settlement
Health/Medicine
Industry
Invention
Landscape Architecture
Law
Literature
Maritime History
Military
Performing Arts
Philosophy
Politics/Government
Religion
Science
Social History
Transportation
Other

Determine what the property type is and whether it is important in illustrating the historic context.

A context may be represented by a variety of important property types. For example, the context of “Civil War Military Activity in Northern Virginia” might be represented by such properties as: a group of mid-19th century fortification structures; an open field where a battle occurred; a knoll from which a general directed troop movements; a sunken transport ship; the residences or public buildings that served as company headquarters; a railroad bridge that served as a focal point for a battle; and earthworks exhibiting particular construction techniques.

Because a historic context for a community can be based on a distinct period of development, it might include numerous property types. For example, the context “Era of Industrialization in Grand Bay, Michigan, 1875 - 1900” could be represented by important property types as diverse as sawmills, paper mill sites, salt refining plants, flour mills, grain elevators, furniture factories, workers housing, commercial buildings, social halls, schools, churches, and transportation facilities.

A historic context can also be based on a single important type of property. The context “Development of County Government in Georgia, 1777 - 1861” might be represented solely by courthouses. Similarly, “Bridge Construction in Pittsburgh, 1870 - 1920” would probably only have one property type.

Determine how the property represents the context through specific historic associations, architectural or engineering values, or information potential (the Criteria for Evaluation).

For example, the context of county government expansion is represented under Criterion A by historic districts or buildings that reflect population growth, development patterns, the role of government in that society, and political events in the history of the State, as well as the impact of county government on the physical development of county seats. Under Criterion C, the context is represented by properties whose architectural treatments reflect their governmental functions, both practically and symbolically. (See *Part VI: How to Identify the Type of Significance of a Property.*)

Determine what physical features the property must possess in order for it to reflect the significance of the historic context.

These physical features can be determined after identifying the following:

- Which types of properties are associated with the historic context,
- The ways in which properties can represent the theme, and
- The applicable aspects of integrity.

Properties that have the defined characteristics are eligible for listing. (See *Part VIII: How to Evaluate the Integrity of a Property.*)

PROPERTIES SIGNIFICANT WITHIN MORE THAN ONE HISTORIC CONTEXT

A specific property can be significant within one or more historic contexts, and, if possible, all of these should be identified. For example, a public building constructed in the 1830s that is related to the historic context of Civil War campaigns in the area might also be related to the theme of political developments in the community during the 1880s. A property is only required, however, to be documented as significant in one context.

COMPARING RELATED PROPERTIES

Properties listed in the National Register must possess significance when evaluated in the perspective of their historic context. Once the historic context is established and the property type is determined, it is not necessary to evaluate the property in question against other properties if:

- It is the sole example of a property type that is important in illustrating the historic context or
- It clearly possesses the defined characteristics required to strongly represent the context.

If these two conditions do not apply, then the property will have to be evaluated against other examples of the property type to determine its eligibility. The geographic level (local, State, or national) at which this evaluation is made is the same as the level of the historic context. (See *Part V: How to Evaluate a Property Within Its Historic Context*.)

LOCAL, STATE, AND NATIONAL HISTORIC CONTEXTS

Historic contexts are found at a variety of geographical levels or scales. The geographic scale selected may relate to a pattern of historical development, a political division, or a cultural area. Regardless of the scale, the historic context establishes the framework from which decisions about the significance of related properties can be made.

LOCAL HISTORIC CONTEXTS

A local historic context represents an aspect of the history of a town, city, county, cultural area, or region, or any portions thereof. It is defined by the importance of the property, not necessarily the physical location of the property. For instance, if a property is of a type found throughout a State, or its boundaries extend over two States, but its importance relates only to a particular county, the property would be considered of local significance.

The level of context of archeological sites significant for their information potential depends on the scope of the applicable research design. For example, a Late Mississippian village site may yield information in a research design concerning one settlement system on a regional scale, while in another research design it may reveal information of local importance concerning a single group's stone tool manufacturing techniques or house forms. It is a question of how the available information potential is likely to be used.

STATE HISTORIC CONTEXTS

Properties are evaluated in a State context when they represent an aspect of the history of the State as a whole (or American Samoa, the District of Columbia, the Commonwealth of the Northern Mariana Islands, Guam, Puerto Rico, or the Virgin Islands). These properties do not necessarily have to belong to property types

found throughout the entire State: they can be located in only a portion of the State's present political boundary. It is the property's historic context that must be important statewide. For example, the "cotton belt" extends through only a portion of Georgia, yet its historical development in the antebellum period affected the entire State. These State historic contexts may have associated properties that are statewide or locally significant representations. A cotton gin in a small town might be a locally significant representation of this context, while one of the largest cotton producing plantations might be of State significance.

A property whose historic associations or information potential appears to extend beyond a single local area might be significant at the State level. A property can be significant to more than one community or local area, however, without having achieved State significance.

A property that overlaps several State boundaries can possibly be significant to the State or local history of each of the States. Such a property is not necessarily of national significance, however, nor is it necessarily significant to all of the States in which it is located.

Prehistoric sites are not often considered to have "State" significance, per se, largely because States are relatively recent political entities and usually do not correspond closely to Native American political territories or cultural areas. Numerous sites, however, may be of significance to a large region that might geographically encompass parts of one, or usually several, States. Prehistoric resources that might be of State significance include regional sites that provide a diagnostic assemblage of artifacts for a particular cultural group or time period or that provide chronological control (specific dates or relative order in time) for a series of cultural groups.

NATIONAL HISTORIC CONTEXTS

Properties are evaluated in a national context when they represent an aspect of the history of the United States and its territories as a whole. These national historic contexts may have associated properties that are locally or statewide significant representations, as well as those of national significance.

Properties designated as nationally significant and listed in the National Register are the prehistoric and historic units of the National Park System and those properties that have been designated National Historic Landmarks. The National Historic Landmark criteria are the standards for nationally significant properties; they are found in the *Code of Federal*

Regulations, Title 36, Part 65 and are summarized in this bulletin in *Part IX: Summary of National Historic Landmarks Criteria for Evaluation*.

A property with national significance helps us understand the history of the nation by illustrating the nationwide impact of events or persons associated with the property, its architectural type or style, or information potential. It must be of exceptional value in representing or illustrating an important theme in the history of the nation.

Nationally significant properties do not necessarily have to belong to a property type found throughout the entire country: they can be located in only a portion of the present political boundaries. It is their historic context that must be important nationwide. For example, the American Civil War

was fought in only a portion of the United States, yet its impact was nationwide. The site of a small military skirmish might be a locally significant representation of this national context, while the capture of the State's largest city might be a statewide significant representation of the national context.

When evaluating properties at the national level for designation as a National Historic Landmark, please refer to the National Historic Landmarks outline, *History and Prehistory in the National Park System and the National Historic Landmarks Program 1987*. (For more information about the National Historic Landmarks program, please write to the Department of the Interior, National Park Service, National Historic Landmarks, 1849 C Street, NW, NC400, Washington, DC 20240.)

END OF DOCUMENT



City of Las Vegas

AGENDA MEMO **SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF:** **JANUARY 27, 2022**

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☒ **Action**
☐ **Report**

SUBJECT:

22-0006-HPC1 – Discussion for possible action regarding approval of the submission of a grant request in the amount of \$75,000 to the Commission for the Las Vegas Centennial in order to support a variety of historic preservation initiatives lead by the Historic Preservation Commission

PURPOSE/BACKGROUND

During the December 8, 2021 Historic Preservation Commission meeting, the Commission requested that a grant request be submitted to the Commission for the Las Vegas Centennial (aka: the Centennial Commission) in order to support a variety of historic preservation initiatives. Funding will be used to support historic commemoration and preservation initiatives within the following components: (a) support for surveys of historic districts, neighborhoods and landmarks; (b) educational awards focused on historic preservation; (c) oral history projects; (d) public awareness campaigns; (e) funding for the production and installation of plaques and markers for historic properties; (f) award grants for the research, documentation and preservation of Las Vegas' historic resources; and (g) engage in other related preservation activities within the scope of the Historic Preservation Commission's authority.

Funding for the current year would allow the Historic Preservation Commission to continue and expand on their historic preservation priorities.

RECOMMENDATION:

Staff recommends APPROVAL.

BACKUP DOCUMENTATION:

1. Grant Request

Form Name:	LVCC Grant
Submission Time:	December 20, 2021 8:25 am
Browser:	Chrome 96.0.4664.93 / Windows
IP Address:	205.153.114.210
Unique ID:	904162138
Location:	

Las Vegas Centennial Commission

PART I. Application Cover Page

Name of Applicant or Organization	City of Las Vegas Historic Preservation Commission
Organization's Mission Statement	The city of Las Vegas Historic Preservation Commission oversees preservation activities in the city for buildings, structures and places of historical and architectural significance. It reviews historic designation applications to National Register of Historic Places and city of Las Vegas Historic Property Register.
Funding Amount Request	75000.00
Authorizing Official	Robert Stoldal
Authorizing Official Title	Chairman
Authorizing Official Address	495 S. Main Street Third Floor Las Vegas, NV 89101
Authorizing Official Title Phone	(702) 513-1869
Authorizing Official Title Email	stoldalr@gmail.com
Primary Contact (If different from above)	Diane Siebrandt
Primary Contact Title	Treasurer
Primary Contact Address	495 S. Main Street Third Floor Las Vegas, NV 89101
Primary Contact Phone	(702) 229-2476
Primary Contact Email	dsiebrandt@lasvegasnevada.gov
Project Funding Category and Working Title	Historic Preservation Commission Projects
Organizations current budget	38544

PART II. Project Description

1. Provide a concise description of your project's objectives and timelines, specifically how it relates to the celebration and commemoration of the history of Las Vegas. If a preservation project, please include any prior work completed, the specific location on the building that will be affected and what materials will be used in the rehabilitation work. For example, "Wood siding will be glued to the walls in order to repair or replace deteriorated original wood siding on the front façade." Reference the site plans and elevations. Also, include what specific project elements Centennial funds will support.*

Funding is requested in order to support a variety of commemoration historic preservation initiatives. It will allow the HPC to continue and expand on our historic preservation priorities such as surveys of historic neighborhoods and landmarks throughout the city, educational awards for historically minority populations, oral history projects, public awareness campaigns, funding the production and installation of plaques and markers for historic properties, and awarding small grants as part of the Commission's Historic Preservation and Bricks & Mortar Grant Programs.

2. Detail the significance of the project or resource based on its cultural, historic, architectural and/or archaeological quality and significance to the community.*

It's important to continue our efforts in unveiling and maintaining the historic value of Las Vegas. Conducting neighborhood and property surveys provide historic context that is relevant to identifying important details about Las Vegas' past. Also, continuing to provide knowledge to the community using the HPC's Strategic Outreach Program aid in these efforts.

3. Include a listing of project partners (if applicable). List all other non-government and government grant awards, including grant amounts and names of agencies. Include funding from other city departments, as well as state and/or federal funding resources received in the past or present, or any future funding allocated for this project.*

N/A

4. Describe how the funds will be used.

Funding will be used to maintain memberships and continuing education tools for staff and commissioners regarding historic preservation. Funding will also include production and installation of plaques for properties added to the City of Las Vegas Historic Property Register in addition to surveying historic neighborhoods within city limits. It will also provide the monies needed to fund the Commission's Historic Preservation and Bricks & Mortar Grant Programs.

5. Provide a brief statement of you or your organization's history and activities with historic or cultural preservation. Include all your experience, whether or not the project was funded by a grant. Include information on any grants previously awarded from the Centennial Commission (project title, amount received and dates of grant award and completion).	Some of our most recent successfully completed projects funded by the HPC include the Nomination of the Las Vegas High School District to the National Register of Historic Places. A consultant was hired to conduct research to determine the eligibility status of the entire campus to be placed on the National Register of Historic Places as a district listing along with the Frazier Hall, Academic Building, and Gymnasium that had already been place on the register. Funding also allowed the commission to maintain memberships and attend conferences for the National Trust for Historic Preservation and the National Alliance of Preservation Commission to further education and knowledge of historic preservation. The Helen Toland Residence and the Huntridge Theatre received plaques for their properties to commemorate their historic significance to the city of Las Vegas and being placed on the City's local register. Each of these projects were completed within their original budgets and timeframes.
6. List key project personnel, including consultants, and briefly describe their responsibilities and qualifications.*	Diane Siebrandt: Treasurer for the Commission and the Historic Preservation Officer for the City of Las Vegas. All projects will be reviewed and approved by her and the Historic Preservation Commission.
7. Describe the key activities of your project, specifically how they relate to the celebration and commemoration of the history of the City of Las Vegas, as well as an associated timeline for your project*	It is anticipated that this funding will begin to support projects by early Spring 2022 and continue throughout the year. Some projects may continue into 2023.
8. If the project is to be phased, please describe each phase.	While not all projects are specifically phased they are subject to approval by the HPC throughout the year and deadlines are based upon approved grant agreements.
9. If applicable, please provide any known project limitations that may affect the project timeline or success (i.e. asbestos; drainage; physical and structural concerns). Include plans for continued project funding and/or maintenance and provide a statement regarding the project's potential for long-term sustainability and success.*	Normally there are no known limitations. However, the recent and unprecedented COVID-19 Pandemic did have an impact on many of our past and current projects. While all projects are now in progress, if another Force Majeure were to occur, some projects may be unexpectedly delayed.

10. If applicable, please provide sustainability plans for financing the operation and/or maintenance of the project at the conclusion of the grant. Describe the final product resulting from your project. Please provide examples of any marketing or social media materials produced by your project.*

Adding potentially eligible properties to our local register with funding through the HPC -may allow some properties to become eligible for tax incentives and other grants that help to maintain the historic integrity of the property and city. In addition, funding continuing education conferences, training courses, and symposiums ensures all HPC members are up to date on relevant conservation and preservation practices.

PART III. . Budget Worksheet

Budget Worksheet File


https://s3.amazonaws.com/files.formstack.com/uploads/2775571/55273897/904162138/55273897_lvccgrant-budgetworksheettemplate_1.docx

PART IV. Additional Required Documents

Primary Contact Name & Title

Diane Siebrandt, Treasurer

Primary Contact Signature & Date



Authorizing Official Name & Title

Robert Stoldal

Authorizing Official Signature & Date



HPC Budget 2022

Expense Description	Total Amount
Funding of all HPC Projects, memberships, and educational tools	Varies depending on each specific project or program
Support for surveys of historic districts, neighborhoods and landmarks	
Educational awards focused on historic preservation	
Oral history projects	
Public awareness campaigns	
Funding for the production and installation of plaques and markers for historic properties	
Award grants for the research, documentation and preservation of Las Vegas' historic resources	
Engage in other related preservation activities within the scope of the Historic Preservation Commission's authority	
TOTAL	\$75,000

Historic Preservation Commission

Grant Request to the Centennial Commission

- In operation since 1991
- The city of Las Vegas Historic Preservation Commission oversees preservation activities in the city for buildings, structures and places of historical and architectural significance. It reviews historic designation applications to National Register of Historic Places and City of Las Vegas Historic Property Register.
- Grant request in the amount of \$75,000.00
- Support the HPCs small grant program
- Provide the monies necessary to match federally funded grants
- Support the HPCs administrative needs


Memberships & Educational Tools

Maintaining these memberships allow commissioners attend conferences and workshops all related to furthering their knowledge in topics related to historic preservation.



Surveys

- Surveys allow us to understand and identify properties that are historically significant to our city.
- Some surveys use funds to match federal grants such as the Westside Survey & the Charleston Heights Survey.

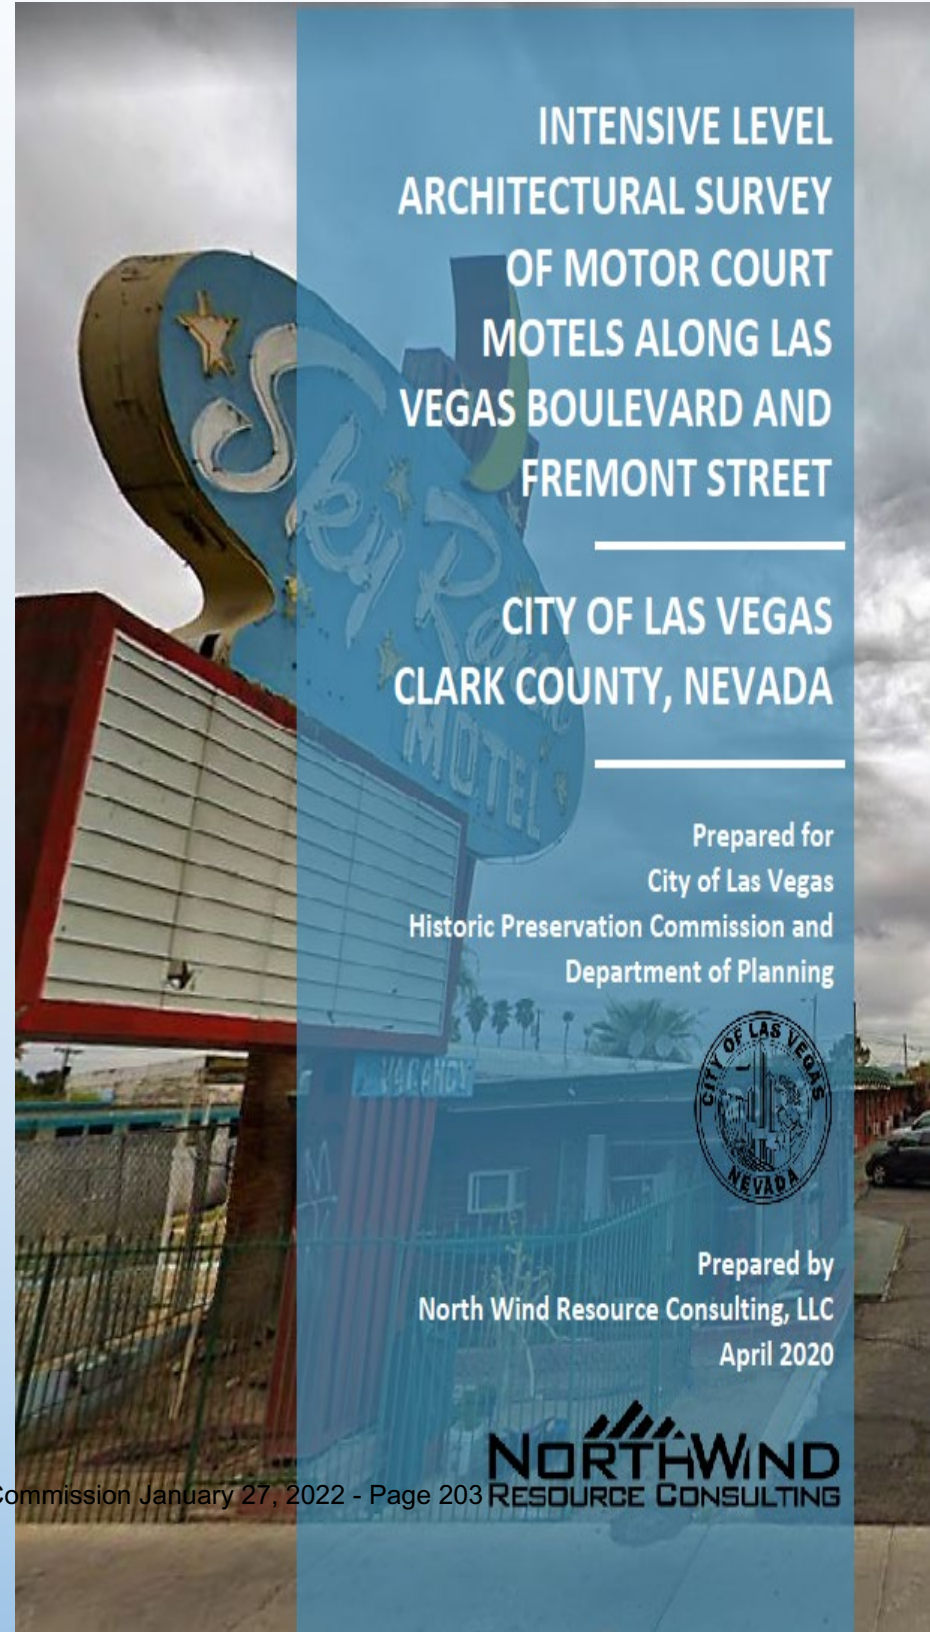

Plaques & Markers

- Plaques inform the public that a property has been placed on the City of Las Vegas Historic Property Register.



Strategic Outreach/Admin Costs

These projects help with our public outreach in communities!

ABOUT US

The City of Las Vegas Historic Preservation Commission oversees preservation activities in the city for buildings, structures and places of historical and architectural significance. It reviews historic designation applications to the National Register of Historic Places and the City of Las Vegas Historic Property Register.

VISIT US ON THE WEB!
www.lasvegasnevada.gov/history

HISTORICALLY DESIGNATED LAS VEGAS NEIGHBORHOODS

BERKLEY SQUARE
BEVERLY GREEN
JOHN S. PARK

Last Updated 12/2021

FOR MORE INFORMATION PLEASE CONTACT
Diane Siebrandt,
Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

GUIDELINES FOR LIVING IN DESIGNATED HISTORIC DISTRICT

NATIONAL REGISTER OF HISTORIC PLACES

A nationally recognized historic district is one that is listed in the National Register of Historic Places. The National Register is our country's official list of historic places worthy of preservation. It includes individual buildings, structures, sites and objects as well as historic districts that are historically, architecturally or archaeologically significant. National Register listing recognizes the significance of properties and districts. By doing so, it identifies significant historic resources in a community. Boundaries of districts are tightly drawn to encompass only concentrated areas of historic buildings. Information compiled to nominate a historic district can be used in a variety of planning and development activities. A listing also makes available specific preservation incentives and provides a limited degree of protection from the effects of federally funded, licensed, or permitted activities.

The National Register is maintained by the U.S. Department of the Interior. Districts and other properties are listed in the register through a 17-step process that involves identification, documentation and evaluation. Historic districts most commonly encompass central business districts, residential neighborhoods, industrial areas, rural areas and occasionally entire communities.

THERE'S A DIFFERENCE

CITY OF LAS VEGAS HISTORIC PROPERTY REGISTER

A property or district listed on The City of Las Vegas Historic Property Register is designated by local ordinance and falls under the jurisdiction of the Historic Preservation Commission. A local historic district is generally "overlaid" on existing zoning classifications in a community; therefore, the commission deals only with the appearance of the district, not with the uses to which properties in the district are put (uses are determined through the zoning and land-use process).

A local historic property or district is a geographically definable area or building, urban or rural, which contains structure(s), site(s), and/or work(s) of art, which have special historical or aesthetic interest or value; represent one or more periods or styles of architecture typical of one or more eras in the history of the municipality, county, state or region; and cause that area to constitute a visibly perceptible section of the community.

The designation of a local district protects the significant properties and historic character of the district. It provides communities with the means to make sure that growth, development and change take place in ways that respect important architectural, historical and environmental characteristics. Local designation encourages sensitive development in the district and discourages unsympathetic changes from occurring. This happens through a process called design review, whereby the commission approves major changes that are planned for the district or does not approve (with suggestions for improvement). The commission makes these decisions based on a certificate of appropriateness application that must be completed and submitted by the property owner.

FOR MORE INFORMATION PLEASE CONTACT
Diane Siebrandt,
Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

Special Historic Preservation Commission January 27, 2022 Page 205

DO YOU KNOW YOU LIVE IN A DESIGNATED HISTORIC DISTRICT?

WHAT DOES IT MEAN TO BE ON THE HISTORIC REGISTER?

It means that your neighborhood retains its historic character making it an exceptionally unique area in which to live. Communities are provided with the means to ensure that growth, development, and change take place in ways that respect important architectural, historical, and environmental characteristics of your neighborhood.

HOW DOES YOUR NEIGHBORHOOD RETAIN ITS HISTORIC CHARACTER?

By adhering to the City of Las Vegas Unified Development Code Title 19.10.150 Historic Designation Ordinance, which provides the details of the how, why, when and what it means to be a designated historic district. (<https://files.lasvegasnevada.gov/planning/Historic-Designation-Ordinance.pdf>)

Please remember that if you intend to add, alter, remove or otherwise make any changes to the exterior sections of your house that are visible from a public right-of-way, you **MUST** complete and submit a Certificate of Appropriateness Application **BEFORE** you start the work. (<https://files.lasvegasnevada.gov/planning/App-for-Certificate-of-Appropriateness.pdf>)

The City of Las Vegas Historic Preservation Commission and the city's Historic Preservation Officer oversee preservation activities in the city. The Commission holds public meetings on a monthly basis.

YOU CAN READ MORE ABOUT THE HISTORIC PRESERVATION INITIATIVES HERE:
<https://www.lasvegasnevada.gov/hp>

FOR MORE INFORMATION PLEASE CONTACT
Diane Siebrandt, Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

National and Local Historic Registers Property and Districts

- Funding helps nominate historic properties and districts to the Las Vegas Historic Property Register and the National Register of Historic Places.

United States Department of the Interior
National Park Service

National Register of Historic Places Registration Form

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in National Register Bulletin, *How to Complete the National Register of Historic Places Registration Form*. If any item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions.

1. Name of Property

Historic name: Las Vegas High School Historic District

Other names/site number: Las Vegas Academy of the Arts

Name of related multiple property listing:

Historic School Buildings in the Evolution of the Fifth Supervision School District, Nevada

(Enter "N/A" if property is not part of a multiple property listing)

2. Location

Street & number: 315 South 7th Street; 925 East Clark Avenue

City or town: Las Vegas State: Nevada County: Clark

Not For Publication: ☐

Vicinity: ☐

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act, as amended,

I hereby certify that this ___ nomination ___ request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60.

In my opinion, the property ___ meets ___ does not meet the National Register Criteria. I recommend that this property be considered significant at the following level(s) of significance:

___ national ___ statewide ___ local

Applicable National Register Criteria:

___ A ___ B ___ C ___ D

Other projects that add value to the history of Las Vegas

- Neon Museum Times of the Signs
- Neon Museum Conservation Plan
- Print and frame awards for Historic Preservation Month



City of Las Vegas

AGENDA MEMO SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF: JANUARY 27, 2022

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☒ Action
☐ Report

SUBJECT:

22-0008-HPC1 - Discussion for possible action regarding approval of the submission of a grant request in the amount of \$50,000 to the National Park Service Underrepresented Community Grant Program in order to hire a consultant to conduct a Historic Context and Reconnaissance Level Survey of a study area identified as Rafael Rivera, located in East Las Vegas, generally bounded by Bruce Street, Wengert Avenue, Mojave Road and Interstate-515 - Ward 3 (Diaz)

PURPOSE/BACKGROUND

The National Park Service's (NPS) Underrepresented Community Grant Program (URC) works towards diversifying nominations submitted to the National Register of Historic Places. Projects include surveys and inventories of historic properties associated with communities underrepresented in the National Register, as well as the development of nominations to the National Register for specific sites. Grants are awarded through a competitive process and do not require a non-Federal match.

The proposed project is to complete a Historic Context and Reconnaissance Level Survey of resources associated with the Latinx community within a study area identified as Rafael Rivera located in East Las Vegas. The project will entail conducting background historical research on resources and any associated people or persons, events, trends or patterns that are significant to the history of the Latinx population in East Las Vegas. This will include identifying and evaluating architectural elements of structures within a period of significance between 1940 and 1969. In addition, the names of individuals and groups will also be researched in order to determine when they contributed to the history of the Hispanic population in East Las Vegas during these decades.

The Rafael Rivera study area encompasses approximately 509 acres of several historic-aged structures. A windshield survey will be conducted for 865 parcels within the proposed study area. From this survey, 150 properties will be selected for a Reconnaissance Level Survey that will provide data for three Historic Contexts for the periods of significance as follows: (1) 1940-1949, (2) 1950-1959, and (3) 1960-1969. These contexts will be used to frame the developmental history of this small section of East Las Vegas to assist with establishing a framework for future decisions about the identification, evaluation, registration, and treatment of historic properties within the survey area. The survey will provide recommendations for historic listing for both the national and local historic registers.

City of Las Vegas

Because the due date for the proposal submission fell in-between Commission meeting, the proposal was submitted to meet the January 11, 2022 deadline.

RECOMMENDATION:

Staff recommends APPROVAL.

BACKUP DOCUMENTATION:

1. Grant Information





P22AS00047
FY2021 Historic Preservation Fund - Underrepresented Community Grants
Department of the Interior
National Park Service

GENERAL INFORMATION

Document Type:	Grants Notice
Funding Opportunity Number:	P22AS00047
Funding Opportunity Title:	FY2021 Historic Preservation Fund - Underrepresented Community Grants
Opportunity Category:	Discretionary
Opportunity Category Explanation:	
Funding Instrument Type:	Grant
Category of Funding Activity:	Arts (see "Cultural Affairs" in CFDA) Humanities (see "Cultural Affairs" in CFDA) Other (see text field entitled "Explanation of Other Category of Funding Activity" for clarification)
Category Explanation:	Historic Preservation
Expected Number of Awards:	
CFDA Number(s):	15.904 -- Historic Preservation Fund Grants-In-Aid
Cost Sharing or Matching Requirement:	No
Version:	Synopsis 2
Posted Date:	Oct 08, 2021
Last Updated Date:	Oct 08, 2021
Original Closing Date for Applications:	Jan 11, 2022 Electronically submitted applications must be submitted no later than 11:59 PM, ET, on the listed application due date. Applicants are held responsible for their proposals being submitted to the National Park Service. Applications must be received by the date above. Applicants are encouraged to submit the application well before the deadline. Application preparation time may take several weeks. Start the application process as soon as possible. Applications received after the deadline will not be reviewed or considered for award. If it is determined that a proposal was not considered due to lateness, the applicant will be notified after the selection process.
Current Closing Date for Applications:	Jan 11, 2022 Electronically submitted applications must be submitted no later than 11:59 PM, ET, on the listed application due date. Applicants are held responsible for their proposals being submitted to the National Park Service. Applications must be received by the date above. Applicants are encouraged to submit the application well before the deadline. Application preparation time may take several weeks. Start the application process as soon as possible. Applications received after the deadline will not be reviewed or considered for award. If it is determined that a proposal was not considered due to lateness, the applicant will be notified after the selection process.
Archive Date:	Sep 30, 2022
Estimated Total Program Funding:	\$1,000,000
Award Ceiling:	\$50,000
Award Floor:	\$15,000

ELIGIBILITY

Eligible Applicants:

State governments
City or township governments
Native American tribal governments (Federally recognized)
Native American tribal organizations (other than Federally recognized tribal governments)
Special district governments
County governments

Additional Information on Eligibility: In accordance with the National Historic Preservation Act as amended, 54 USC §300101, this funding opportunity is limited to: State Historic Preservation Offices Tribal Historic Preservation Offices, Federally-recognized Tribes, Alaska Native Villages/Corporations, and Native Hawaiian Organizations, as defined by 54 USC § 300309, 54 USC 300313 and 54 USC 300314 Certified Local Governments (list provided at <http://go.nps.gov/clg>)

ADDITIONAL INFORMATION

Agency Name: National Park Service

Description:

The National Park Service's (NPS) Underrepresented Community Grant Program (URC) is intended to diversify the nominations submitted to the National Register of Historic Places to include communities that are currently underrepresented. URC grants are funded by the Historic Preservation Fund (HPF), and are administered by the NPS. Projects include surveys and nominations of historic sites associated with communities underrepresented in the National Register. Every application must include a National Register nomination or amendment.

Link to Additional Information: go.nps.gov/urc

Grantor Contact Information: If you have difficulty accessing the full announcement electronically, please contact:

STLPG Staff
STLPG@nps.gov


STLPG@nps.gov



Summary

The proposed project is to complete a Historic Context and Reconnaissance Level Survey of resources in an area within East Las Vegas identified as Rafael Rivera. Rafael Rivera is one of several neighborhoods located within a larger geographical area located east of downtown Las Vegas. The Historic Context and Reconnaissance Level Survey is planned in order to provide data about the built environment and community ties associated with the Latinx community within the Rafael Rivera study area. The project will entail hiring a Cultural Resource Management (CRM) consulting firm with qualified Architectural Historians on staff who will complete the research and survey. The project will involve conducting background historical research on resources and any associated people or persons, events, trends or patterns that are significant to the history of the Latinx population in East Las Vegas. This will include identifying and evaluating architectural elements of structures within a period of significance between 1940 and 1969. In addition, the names of individuals and groups will also be researched in order to determine if and when they contributed to the history of the Hispanic population in East Las Vegas during these decades.

The proposed Rafael Rivera study area encompasses approximately 509 acres of several historic-aged structures within an area roughly bounded by South Bruce Street, Wengert Avenue, North Mojave Road and Interstate 515. A windshield survey will be conducted for a total of 865 parcels within the proposed study area. From this survey, 150 properties will be selected for a Reconnaissance Level Survey that will provide data for three Historic Contexts for the periods of significance as follows: (1) 1940-1949, (2) 1950-1959, and (3) 1960-1969. These contexts will be used to frame the developmental history of this small section of East Las Vegas to assist with establishing a framework for future decisions about the identification, evaluation, registration, and treatment of historic properties within the survey area. The survey will provide recommendations for historic listing for both the national and local historic registers.

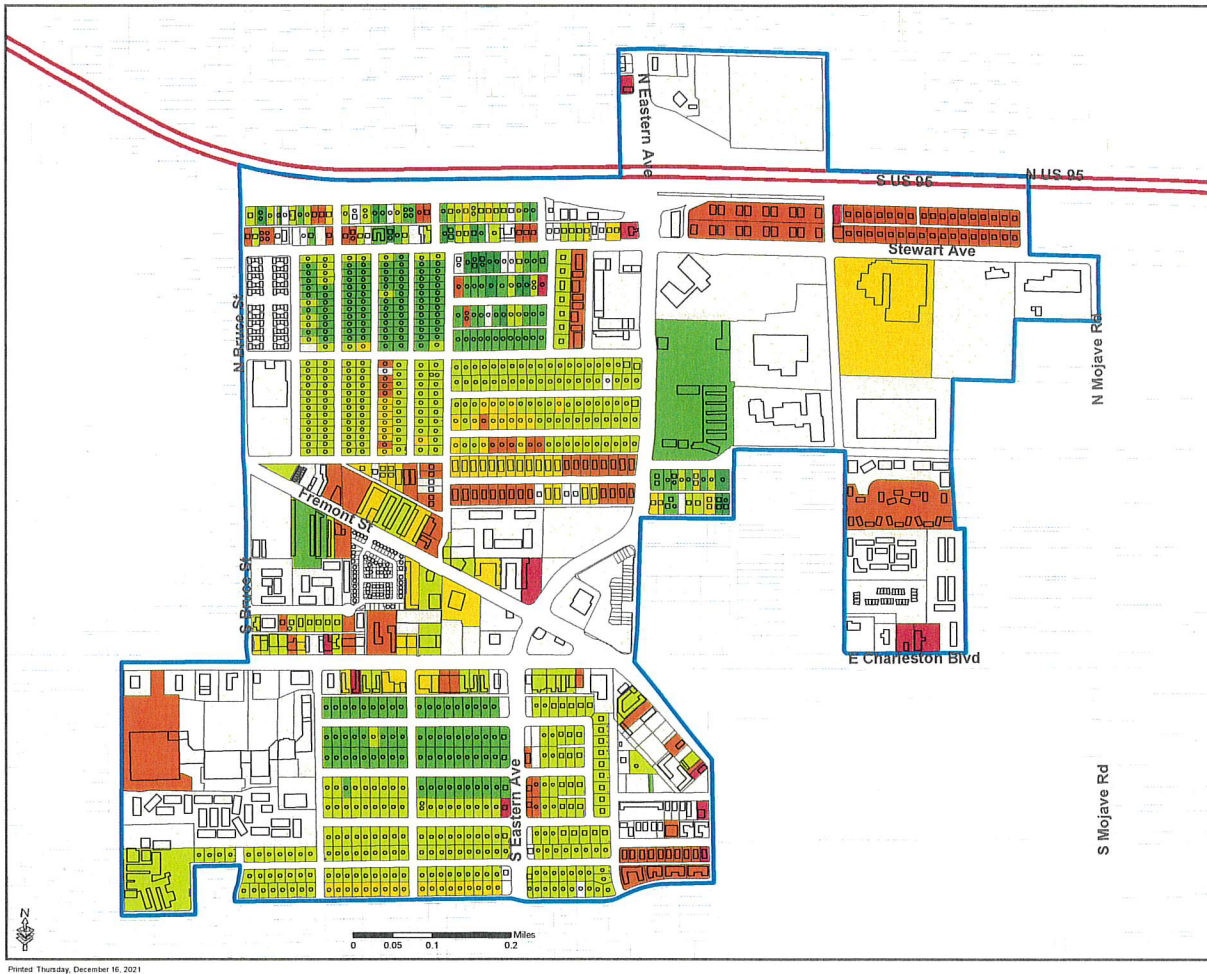

City of Las Vegas

Rafael Rivera parcel
construction year map

Parcels

Construction Year

- 1940 - 1945 (20 total)
- 1946 - 1950 (273 total)
- 1951 - 1955 (351 total)
- 1956 - 1960 (83 total)
- 1961 - 1965 (125 total)
- 1966 - 1969 (13 total)

Building Footprints

- Building Footprint



GIS maps are normally produced
only to meet the needs of the City.
Due to continuous development activity
this map is for reference only.
Geographic Information System
Planning & Development Dept.
702-259-4301

Printed Thursday, December 16, 2021

National Park Service Underrepresented Community Grant

- P22AS00047 - FY2021 Historic Preservation Fund - Underrepresented Community Grants

- Department of the Interior
- National Park Service



Historic Context and Reconnaissance Level Survey of East Las Vegas (Rafael Rivera)

\$50,000.00 Grant - No Match Required

Summary: The proposed project is to hire a Cultural Resource Management Consulting Firm to complete a Historic Context and Reconnaissance Level Survey of resources in an area within East Las Vegas identified as Rafael Rivera. Rafael Rivera is one of several neighborhoods located within a larger geographical area located east of downtown Las Vegas.

- The project will involve conducting background historical research on resources and any associated people or persons, events, trends or patterns that are significant to the history of the Latinx population in East Las Vegas
- Identifying and evaluating architectural elements of structures within a period of significance between 1940 and 1969
- The names of individuals and groups will also be researched in order to determine if and when they contributed to the history of the Hispanic population in East Las Vegas during these decades.
- A windshield survey will be conducted for a total of 865 parcels within the proposed study area
- 150 properties will be selected for a Reconnaissance Level Survey that will provide data for three Historic Contexts for the periods of significance: (1) 1940-1949, (2) 1950-1959, and (3) 1960-1969
- Study area encompasses approximately 509 acres of several historic-aged structures within an area roughly bounded by South Bruce Street, Wengert Avenue, North Mojave Road and Interstate 515

City of Las Vegas

Rafael Rivera parcel
construction year map


Parcels

Construction Year

- 1940 - 1945 (20 total)
- 1946 - 1950 (273 total)
- 1951 - 1955 (351 total)
- 1956 - 1960 (83 total)
- 1961 - 1965 (125 total)
- 1966 - 1969 (13 total)

Building Footprints

- Building Footprint

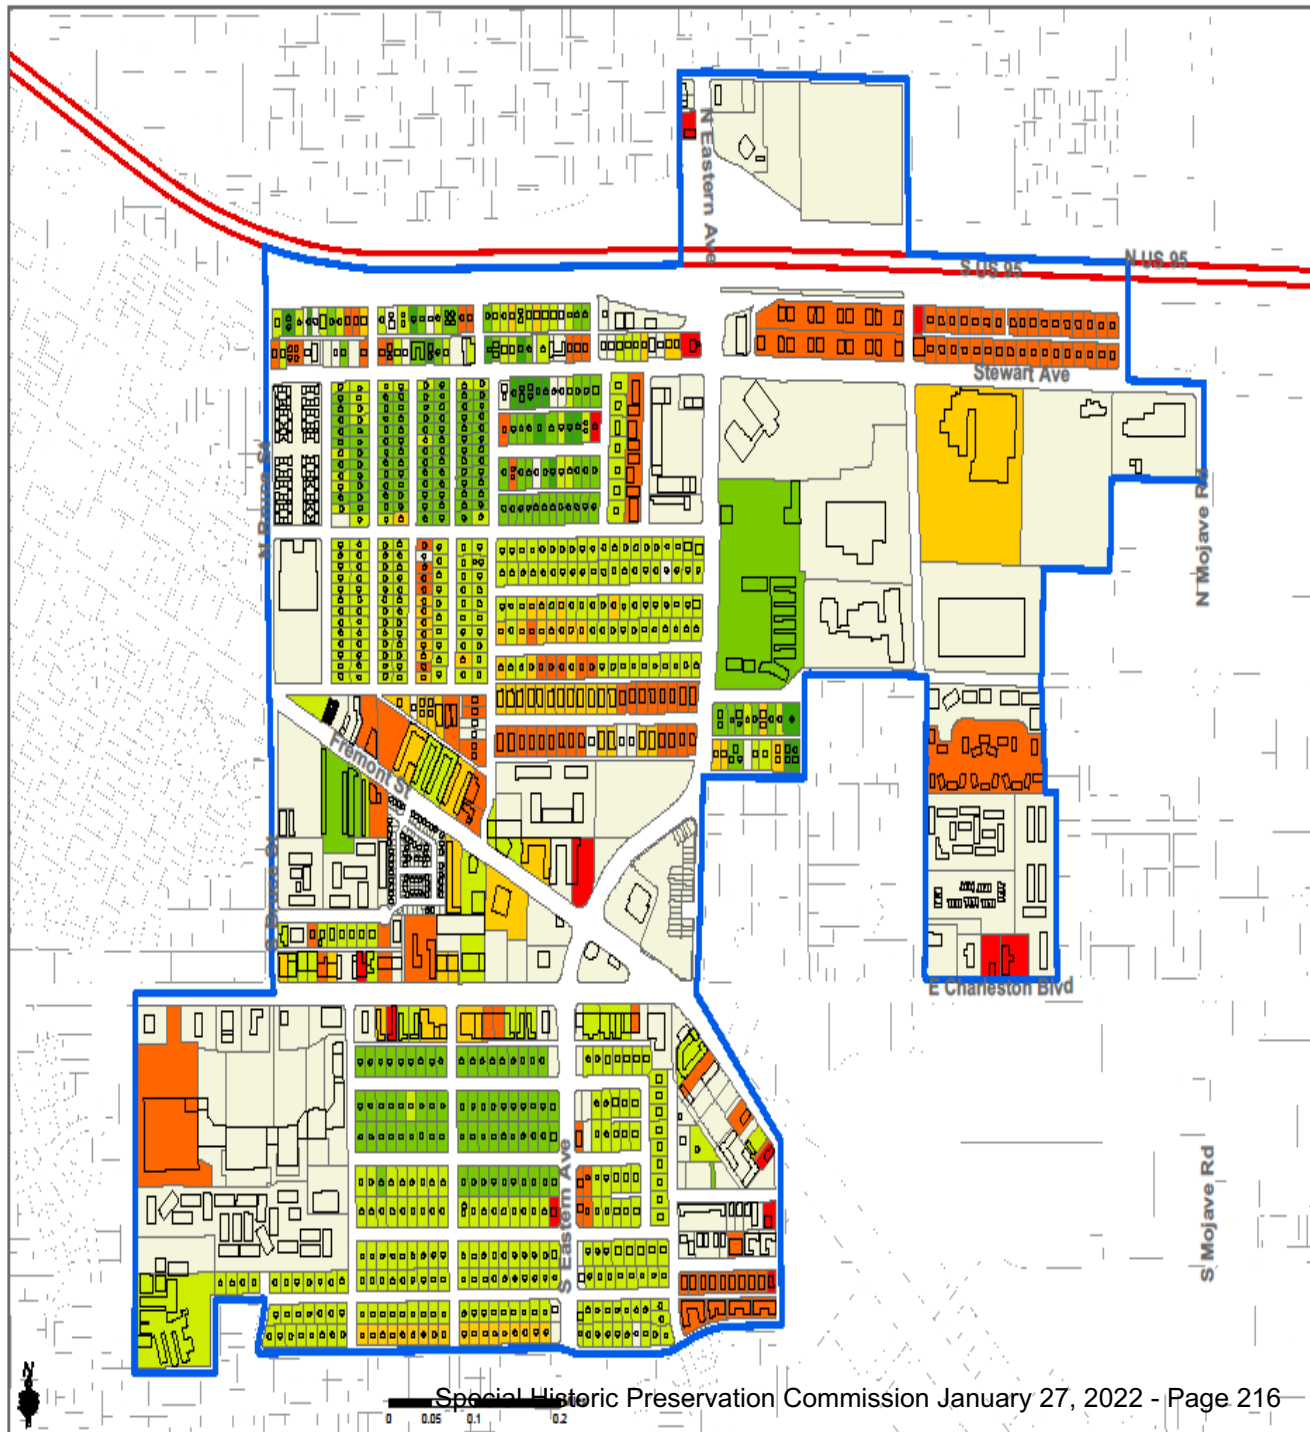

City of Las Vegas

AGENDA MEMO **SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF:** **JANUARY 27, 2022**

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☐ Action
☒ Report

SUBJECT:

22-0009-HPC1 - Report by the Department of Planning regarding an update on the Strategic Neighborhood Outreach Program

PURPOSE/BACKGROUND

During the January 27, 2021 HPC meeting, the Commission approved \$50,000 for staff to create and implement a strategic neighborhood outreach program. The program was delayed due to COVID issues, but is currently in progress. This report provides an update on the program's initiatives.

RECOMMENDATION:

Report only; No Action

BACKUP DOCUMENTATION:

1. Brochure
2. Door Hanger

ABOUT US

The City of Las Vegas Historic Preservation Commission oversees preservation activities in the city for buildings, structures and places of historical and architectural significance. It reviews historic designation applications to the National Register of Historic Places and the City of Las Vegas Historic Property Register.

VISIT US ON THE WEB!
www.lasvegasnevada.gov/history

HISTORICALLY DESIGNATED LAS VEGAS NEIGHBORHOODS

BERKLEY SQUARE
BEVERLY GREEN
JOHN S. PARK

Last Updated 12/2021



**FOR MORE INFORMATION
PLEASE CONTACT**

Diane Siebrandt,
Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

GUIDELINES FOR LIVING IN A DESIGNATED HISTORIC DISTRICT



Historic Preservation
City of Las Vegas

NATIONAL REGISTER OF HISTORIC PLACES

The National Register of Historic Places is our country's official list of historic places worthy of preservation. It includes individual buildings, structures, sites and objects as well as historic districts that are historically, architecturally, or archaeologically significant.

CITY OF LAS VEGAS HISTORIC PROPERTY REGISTER

A property or district listed on The City of Las Vegas Historic Property Register is designated by local ordinance and falls under the jurisdiction of the City of Las Vegas Historic Preservation Commission (HPC) per municipal ordinance Title 19.10.150. The HPC is responsible for reviewing and making decisions concerning applications for new construction, alteration, demolition or removal of any element associated with a historic landmark, district, site, building, structure and object.

If your property is listed on the City of Las Vegas Historic Property Register, or is located within the boundaries of a locally designated historic district, there are certain procedures that must be followed for projects proposing to alter your property.

STEP 1: Whenever a building permit is required to alter, remodel, build, or otherwise develop a historic property, the applicant must first obtain the approval of the Historic Preservation Commission.

STEP 2: Apply for a building permit online (www.lasvegasnevada.gov/Business/Permits-Licenses/Building-Permits) or at the Planning Department, 495 S. Main St. Depending on the nature of the work, you may be asked to submit an application for a Certificate of Appropriateness (CoA). There is no additional fee for the CoA.

STEP 3: If the work is considered to be "minor in nature," the application may be reviewed in-house by the Historic Preservation Officer and your permit may be approved that same day. Minor work can include: Replacing roof shingles with the same type of roof shingles, window replacement, or replacing air conditioning units.

-OR-

STEP 3: If the work is considered to be "major in nature," then the proposed work must be heard by the commission. Major work can include but not limited to: room additions, car port alterations or fencing that requires a permit.

STEP 4: The application must include drawings of the proposed work, photographs of the existing house and any manufacturer's brochures, if applicable.

STEP 5: Your building permit will not be approved until the proposed work has been reviewed and approved by the commission.

STEP 6: The commission will review your application and make a recommendation for approval or denial based on whether the proposed work is determined to be compatible with the historic context of the building or district.

STEP 7: If the application is denied, you have the right to appeal to the city council.





DO YOU KNOW YOU LIVE IN A DESIGNATED HISTORIC DISTRICT?

WHAT DOES IT MEAN TO BE ON THE HISTORIC REGISTER?

It means that your neighborhood retains its historic character making it an exceptionally unique area in which to live. Communities are provided with the means to ensure that growth, development, and change take place in ways that respect important architectural, historical, and environmental characteristics of your neighborhood.

HOW DOES YOUR NEIGHBORHOOD RETAIN IT'S HISTORIC CHARACTER?

By adhering to the City of Las Vegas Unified Development Code Title 19.10.150 Historic Designation Ordinance, which provides the details of the how, why, when and what it means to be a designated historic district. (<https://files.lasvegasnevada.gov/planning/Historic-Designation-Ordinance.pdf>)

Please remember that if you intend to add, alter, remove or otherwise make any changes to the exterior sections of your house that are visible from a public right-of-way, you **MUST** complete and submit a Certificate of Appropriateness Application **BEFORE** you start the work. (<https://files.lasvegasnevada.gov/planning/App-for-Certificate-of-Appropriateness.pdf>)

The City of Las Vegas Historic Preservation Commission and the city's Historic Preservation Officer oversee preservation activities in the city. The Commission holds public meetings on a monthly basis.

**YOU CAN READ MORE ABOUT
THE HISTORIC PRESERVATION INITIATIVES HERE:**
<https://www.lasvegasnevada.gov/hp>



FOR MORE INFORMATION PLEASE CONTACT
Diane Siebrandt, Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

PD-5238 12/21



DO YOU KNOW YOU LIVE IN A DESIGNATED HISTORIC DISTRICT?

WHAT DOES IT MEAN TO BE ON THE HISTORIC REGISTER?

It means that your neighborhood retains its historic character making it an exceptionally unique area in which to live. Communities are provided with the means to ensure that growth, development, and change take place in ways that respect important architectural, historical, and environmental characteristics of your neighborhood.

HOW DOES YOUR NEIGHBORHOOD RETAIN IT'S HISTORIC CHARACTER?

By adhering to the City of Las Vegas Unified Development Code Title 19.10.150 Historic Designation Ordinance, which provides the details of the how, why, when and what it means to be a designated historic district. (<https://files.lasvegasnevada.gov/planning/Historic-Designation-Ordinance.pdf>)

Please remember that if you intend to add, alter, remove or otherwise make any changes to the exterior sections of your house that are visible from a public right-of-way, you **MUST** complete and submit a Certificate of Appropriateness Application **BEFORE** you start the work. (<https://files.lasvegasnevada.gov/planning/App-for-Certificate-of-Appropriateness.pdf>)

The City of Las Vegas Historic Preservation Commission and the city's Historic Preservation Officer oversee preservation activities in the city. The Commission holds public meetings on a monthly basis.

**YOU CAN READ MORE ABOUT
THE HISTORIC PRESERVATION INITIATIVES HERE:**
<https://www.lasvegasnevada.gov/hp>



FOR MORE INFORMATION PLEASE CONTACT
Diane Siebrandt, Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

PD-5238 12/21



DO YOU KNOW YOU LIVE IN A DESIGNATED HISTORIC DISTRICT?

WHAT DOES IT MEAN TO BE ON THE HISTORIC REGISTER?

It means that your neighborhood retains its historic character making it an exceptionally unique area in which to live. Communities are provided with the means to ensure that growth, development, and change take place in ways that respect important architectural, historical, and environmental characteristics of your neighborhood.

HOW DOES YOUR NEIGHBORHOOD RETAIN IT'S HISTORIC CHARACTER?

By adhering to the City of Las Vegas Unified Development Code Title 19.10.150 Historic Designation Ordinance, which provides the details of the how, why, when and what it means to be a designated historic district. (<https://files.lasvegasnevada.gov/planning/Historic-Designation-Ordinance.pdf>)

Please remember that if you intend to add, alter, remove or otherwise make any changes to the exterior sections of your house that are visible from a public right-of-way, you **MUST** complete and submit a Certificate of Appropriateness Application **BEFORE** you start the work. (<https://files.lasvegasnevada.gov/planning/App-for-Certificate-of-Appropriateness.pdf>)

The City of Las Vegas Historic Preservation Commission and the city's Historic Preservation Officer oversee preservation activities in the city. The Commission holds public meetings on a monthly basis.

YOU CAN READ MORE ABOUT
THE HISTORIC PRESERVATION INITIATIVES HERE:
<https://www.lasvegasnevada.gov/hp>



FOR Special Historic Preservation Commission January 27, 2022 TWP
Diane Siebrandt, Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

PD-0338 12/22



DO YOU KNOW YOU LIVE IN A DESIGNATED HISTORIC DISTRICT?

WHAT DOES IT MEAN TO BE ON THE HISTORIC REGISTER?

It means that your neighborhood retains its historic character making it an exceptionally unique area in which to live. Communities are provided with the means to ensure that growth, development, and change take place in ways that respect important architectural, historical, and environmental characteristics of your neighborhood.

HOW DOES YOUR NEIGHBORHOOD RETAIN IT'S HISTORIC CHARACTER?

By adhering to the City of Las Vegas Unified Development Code Title 19.10.150 Historic Designation Ordinance, which provides the details of the how, why, when and what it means to be a designated historic district. (<https://files.lasvegasnevada.gov/planning/Historic-Designation-Ordinance.pdf>)

Please remember that if you intend to add, alter, remove or otherwise make any changes to the exterior sections of your house that are visible from a public right-of-way, you **MUST** complete and submit a Certificate of Appropriateness Application **BEFORE** you start the work. (<https://files.lasvegasnevada.gov/planning/App-for-Certificate-of-Appropriateness.pdf>)

The City of Las Vegas Historic Preservation Commission and the city's Historic Preservation Officer oversee preservation activities in the city. The Commission holds public meetings on a monthly basis.

YOU CAN READ MORE ABOUT
THE HISTORIC PRESERVATION INITIATIVES HERE:
<https://www.lasvegasnevada.gov/hp>



FOR Special Historic Preservation Commission January 27, 2022 TWP
Diane Siebrandt, Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

PD-0338 12/22

Submitted at Meeting
Date: 1/27/2022 Item 9
By Staff

ABOUT US

The City of Las Vegas Historic Preservation Commission oversees preservation activities in the city for buildings, structures and places of historical and architectural significance. It reviews historic designation applications to the National Register of Historic Places and the City of Las Vegas Historic Property Register.

VISIT US ON THE WEB!

www.lasvegasnevada.gov/history




HISTORICALLY DESIGNATED LAS VEGAS NEIGHBORHOODS

BERKLEY SQUARE
BEVERLY GREEN
JOHN S. PARK

Last Updated 12/2021



FOR MORE INFORMATION
PLEASE CONTACT
Diane Siebrandt,
Historic Preservation Officer
dsiebrandt@lasvegasnevada.gov | 702.229.2476
495 S. Main St, Las Vegas, NV 89101

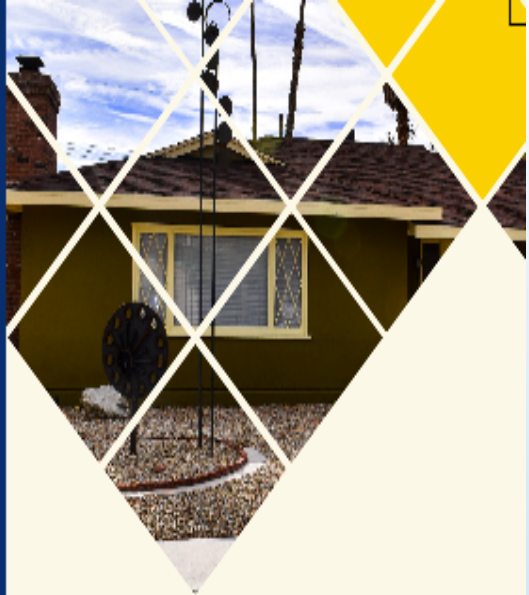

GUIDELINES FOR LIVING IN A DESIGNATED HISTORIC DISTRICT



Historic Preservation
City of Las Vegas

NATIONAL REGISTER OF HISTORIC PLACES

The National Register of Historic Places is our country's official list of historic places worthy of preservation. It includes individual buildings, structures, sites and objects as well as historic districts that are historically, architecturally, or archaeologically significant.

CITY OF LAS VEGAS HISTORIC PROPERTY REGISTER

A property or district listed on The City of Las Vegas Historic Property Register is designated by local ordinance and falls under the jurisdiction of the City of Las Vegas Historic Preservation Commission (HPC) per municipal ordinance Title 19.10.150. The HPC is responsible for reviewing and making decisions concerning applications for new construction, alteration, demolition or removal of any element associated with a historic landmark, district, site, building, structure and object.



If your property is listed on the City of Las Vegas Historic Property Register, or is located within the boundaries of a locally designated historic district, there are certain procedures that must be followed for projects proposing to alter your property.

STEP 1: Whenever a building permit is required to alter, remodel, build, or otherwise develop a historic property, the applicant must first obtain the approval of the Historic Preservation Commission.

STEP 2: Apply for a building permit online (www.lasvegasnevada.gov/Business/Permits-Licenses/Building-Permits) or at the Planning Department, 495 S. Main St. Depending on the nature of the work, you may be asked to submit an application for a Certificate of Appropriateness (CoA). There is no additional fee for the CoA.

STEP 3: If the work is considered to be "minor in nature," the application may be reviewed in-house by the Historic Preservation Officer and your permit may be approved that same day. Minor work can include: Replacing roof shingles with the same type of roof shingles, window replacement, or replacing air conditioning units.

-OR-

STEP 3: If the work is considered to be "major in nature," then the proposed work must be heard by the commission. Major work can include but not limited to: room additions, car port alterations or fencing that requires a permit.

STEP 4: The application must include drawings of the proposed work, photographs of the existing house and any manufacturer's brochures, if applicable.

STEP 5: Your building permit will not be approved until the proposed work has been reviewed and approved by the commission.

STEP 6: The commission will review your application and make a recommendation for approval or denial based on whether the proposed work is determined to be compatible with the historic context of the building or district.

STEP 7: If the application is denied, you have the right to appeal to the city council.



City of Las Vegas

AGENDA MEMO **SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF:** **JANUARY 27, 2022**

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☐ Action
☒ Report

SUBJECT:

22-0010-HPC1 - Report by the Department of Planning regarding background information on the John S. Park Historic District listing

PURPOSE/BACKGROUND

During the December 8, 2021 Historic Preservation Commission meeting, the Commission asked for a report regarding how, when, and why the John S. Park neighborhood was determined to be a historic district. This report will provide information outlining this process, which began in March 2000, and culminated in a historic district listing 3 years later in March 2003.

RECOMMENDATION:

Report only; No action required


BACKUP DOCUMENTATION:

None

John S. Park Neighborhood Meetings


- March 9, 1998: City adopts a Neighborhood Planning Process
- March 14, 2000: John S Park has meeting to discuss creating a Neighborhood Plan
- July 6, 2000: John S Park creates a Steering Committee of 15 neighborhood residents with sub-committees as follows:
 - Historic Designation Committee
 - Land Use Committee
 - Mary Dutton Park Redevelopment Committee
- August 2, 2000 to October 31, 2001: Numerous neighborhood and city meetings to discuss the Neighborhood Plan and the Historic District Listing
- December 19, 2001: City Council passed, adopted and approved Resolution 155-2001 ~ The Historic John S Park Neighborhood Plan
- One of the goals of the plan was for the Las Vegas City Council, via its Historic Preservation Commission, to adapt and support a historic designation for the identified section of the John S Park Neighborhood (page 39)
- The Historic John S Park Neighborhood Plan is available to view on our website:
<https://sawebfilesprod001.blob.core.windows.net/planning/John-S-Park-Neighborhood-Plan.pdf?sv=2017-04-17&sr=b&si=DNNFileManagerPolicy&sig=H4kiM66E4x4NQUH2V7bL8l1js%2BQgqE3Ihljud6WyfWY%3D>
- Or type “John S Park” in Search Bar:
<https://www.lasvegasnevada.gov>

Historic Designation Committee Recommended Historic District

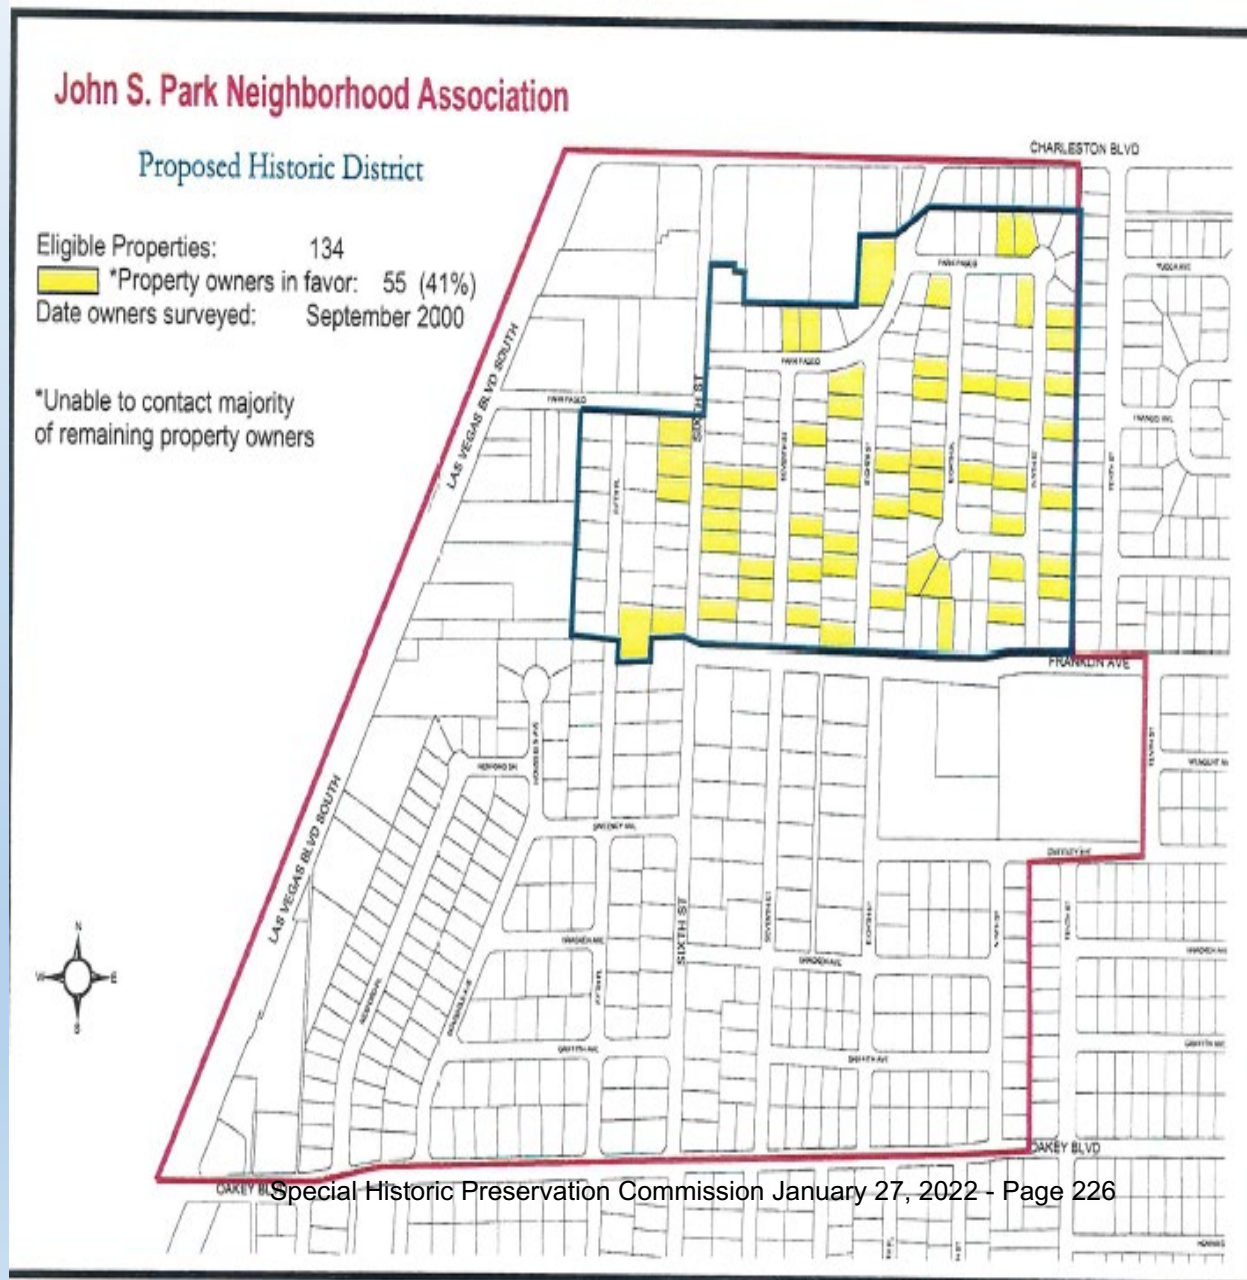

John S. Park Historic District Listing

- January 9, 2002: City signs contract with 20th Century Preservation to conduct a Historic Resource Survey to inventory and evaluate existing properties in the proposed John S Park historic district to determine eligibility for nomination to the National Register of Historic Places and the Las Vegas Historic Property Register
- January to September 2002: Consultant conducted research, field surveys & inventories
- October 2002: Historic Resource Survey Report determines that John S Park Historic District is eligible for nomination for its high level of existing historic integrity and association with building types and design with local and national historic occurrences and trends
- November 20, 2002: Historic Preservation Commission Votes to add John S Park Historic District to city's Historic Property Register
 - Case Number: DIR-1208
 - Neighbors attended the meeting and/or submitted letters both in support of and in objection to the listing
- January 23, 2003: Listing approved at Planning Commission Meeting
- March 19, 2003: Listing approved at City Council Meeting - Officially added to the City of Las Vegas Historic Property Register
- Historic District bounded by 9th Street, 5th Place, Park Paseo and Franklin Avenue (160 homes)
- Once on the Historic Register, zoning regulations were updated in which houses within the district must adhere to the City of Las Vegas Unified Development Code Title 19-10.150 HD-O Historic Designation Overlay District
- May 16, 2003: Added to the National Register of Historic Places (honorary only – listing does not regulate local ordinance)

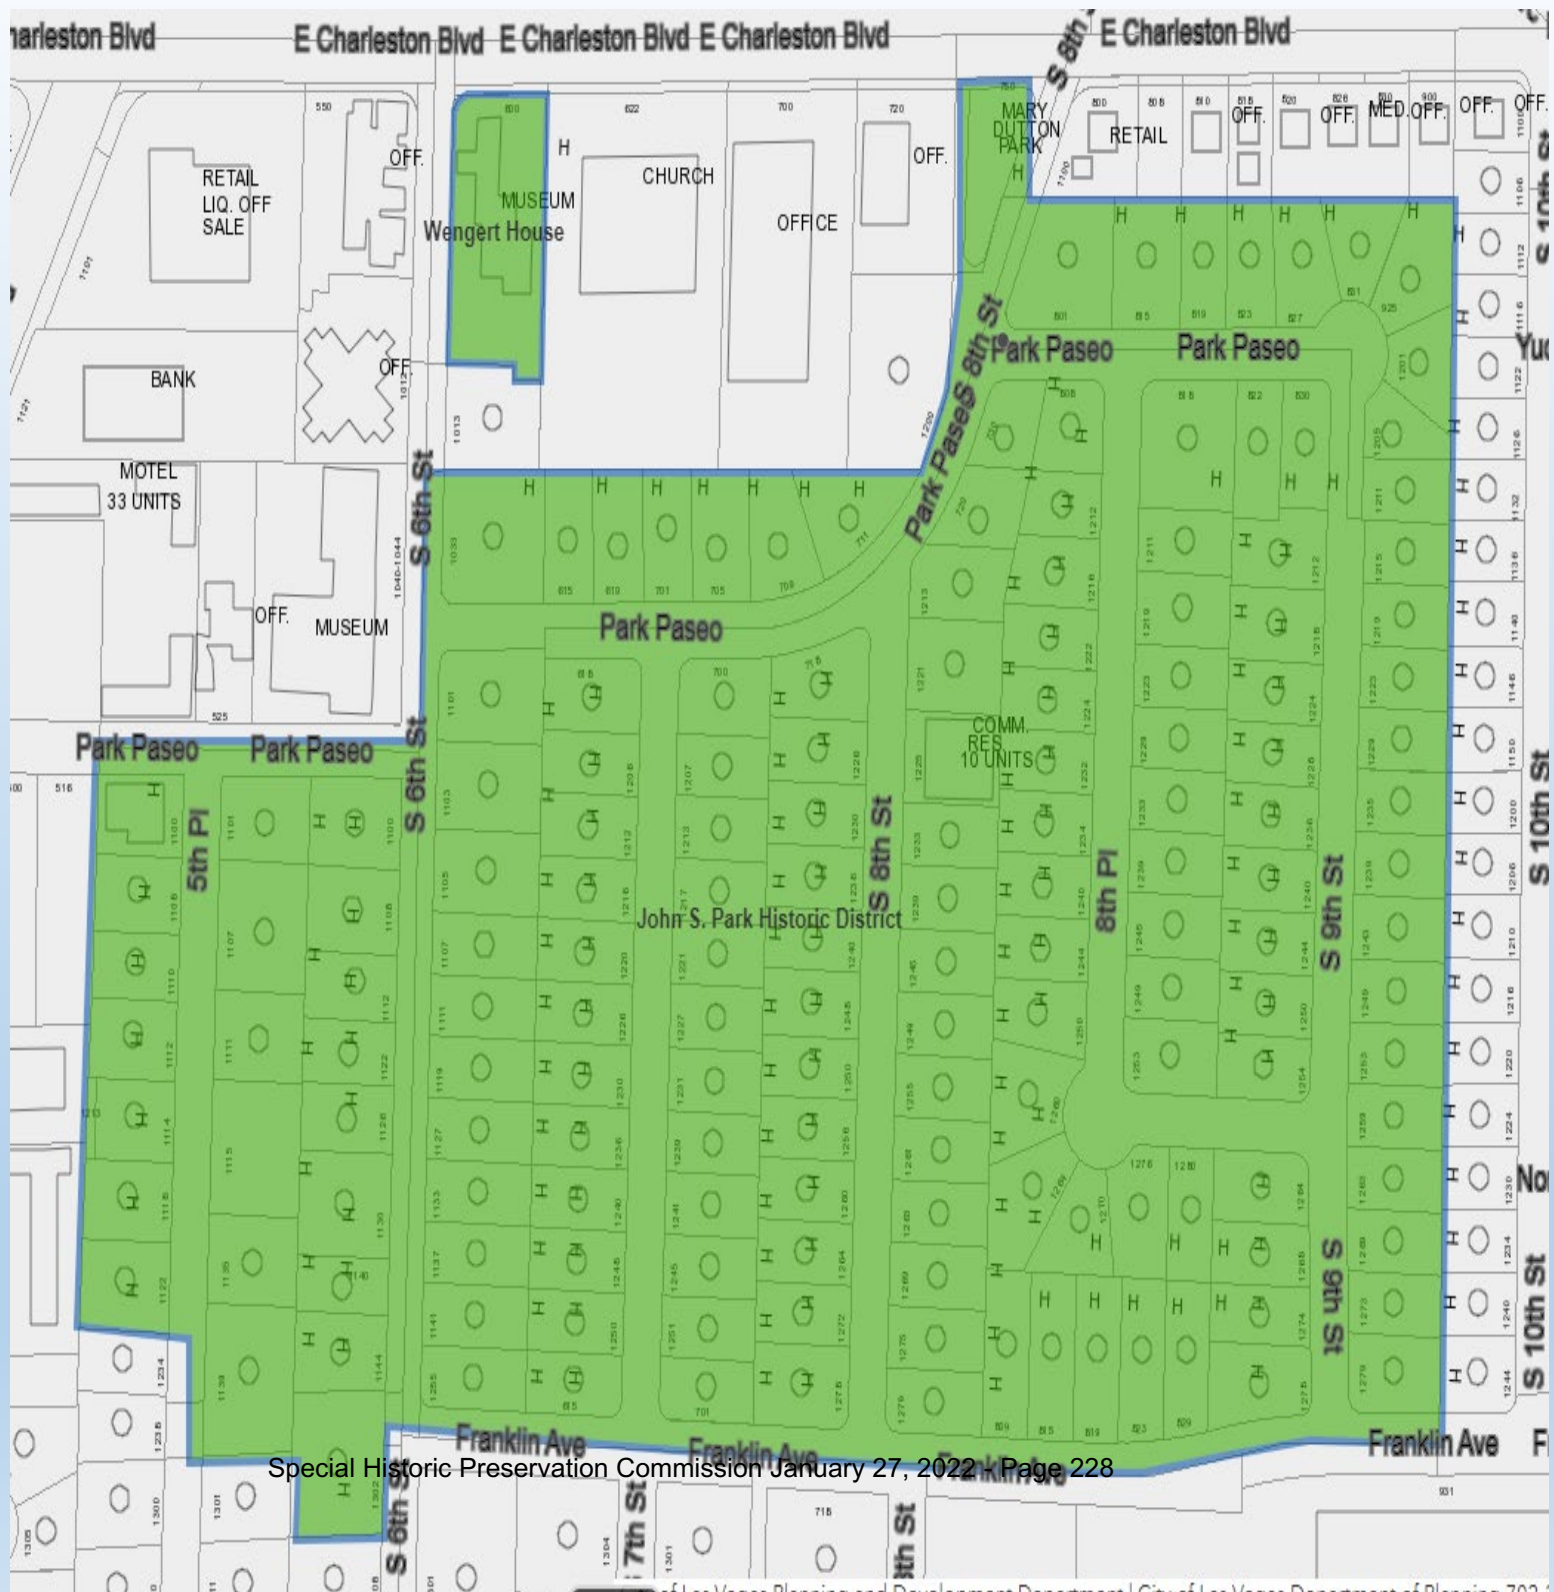

John S. Park Design Guidelines

- October 2002: 20th Century Preservation drafted John S Park Design Guidelines
- May 28, 2003: HPC approved the use of design guidelines
- July 26, 2006: HPC requested update to the guidelines
- September 27, 2006: HPC approved updated guidelines
- October 25, 2006: HPC adopted guidelines
- February 25, 2009: HPC approved modification to revise text for window treatments
- Design guidelines can be viewed on our website:
<https://sawebfilesprod001.blob.core.windows.net/planning/John-S-Park-Neighborhood-Historic-District-Design-Guidelines.pdf?sv=2017-04-17&sr=b&si=DNNFileManagerPolicy&sig=ggv6TX8VOY8tbzXNvcHDYOVw6ty%2FaNBk2IWVT%2Bo1Hm8%3D>
- Or type “John S Park Design Guideline” in Search Bar:
<https://www.lasvegasnevada.gov>

City of Las Vegas

AGENDA MEMO **SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF:** **JANUARY 27, 2022**

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☐ Action
☒ Report

SUBJECT:

22-0011-HPC1 - Report by the Department of Planning regarding Director's updates

PURPOSE/BACKGROUND


The Director of the Department of Planning will provide updates on any items outside the scope of the Project Update list pertinent to the Commission.

RECOMMENDATION:

Report only; No action required

BACKUP DOCUMENTATION:

None

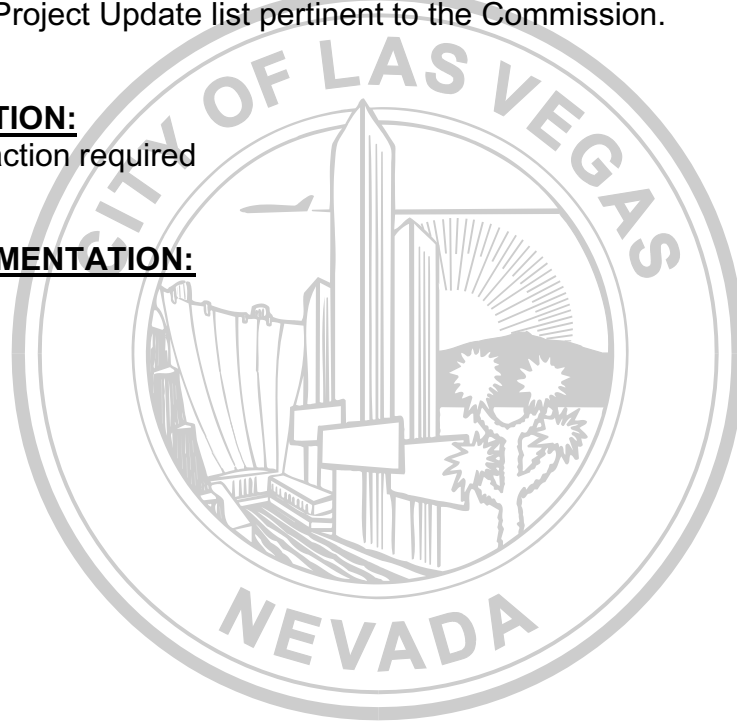

City of Las Vegas

AGENDA MEMO **SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF:** **JANUARY 27, 2022**

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☐ Action
☒ Report

SUBJECT:

22-0012-HPC1 - Report by the Department of Planning regarding Project Update List

PURPOSE/BACKGROUND:

The project update list includes information regarding active grants awarded by the Historic Preservation Commission as well as those awarded by the Commission for the Las Vegas Centennial; updates on historic properties; and on-going and pending future agenda items.

The project update list is updated every month. Additional updates may be available at the meeting.

RECOMMENDATION:

Report only; No action required

BACKUP DOCUMENTATION:

1. Project Update List

Project Updates

Historic Preservation Commission

Updated 4 January 2022

Project Or Site Name	Status	Next Milestone	Project Deadline	Comments/Notes
Historic Preservation Commission Grants/Projects				
Westside Survey	Contract in negotiations			Contract to be approved at March 23, 2022 HPC Meeting
Charleston Heights Survey	Proposals Due January 10, 2022			
Neon Museum Sign of the Times	First half completed September 2021			Second half will take place March 2022
Strategic Neighborhood Outreach	In-progress			
SHPO Survey Grant	Project in Progress		March 2022	Further revisions in progress
Las Vegas High School National Register of Historic Places – District Listing	In DC		August 10, 2021	With Keeper of the NRHP in DC as of December 9, 2021
Commission for the Las Vegas Centennial Grants				
Signs on Sticks	In-progress		Spring 2023	Rummel Hotel/ Par-A-Dice Signs
Charleston Heights Neighborhood Historic Survey	Waiting to confirm contract with contractor		August 2023	Contractor slated to begin March 2022
The City of Las Vegas: The Forties (Part IV) and The Fifties (Part V) Documentary Films	In progress	Pt. 4 – 1 st draft Script due Dec. 9 th Commission comments due Dec 22 nd	May 15 2022 and May 15 2023	Producers in Las Vegas 2 nd in Oct. for interviews
Las Vegas Days Parade 2022	In pre-production		May 2022	Will be held May 14, 2022
City Clerk Office Conservation of Historic Materials Project	In progress		July 31, 2022	

Discovery Children's Museum	Completed		August 2021	Commissioners are invited to attend the film premiere on January 12, 2022 at the museum.
Las Vegas Days Rodeo	Completed	Rodeo November 11-13		Will give report at March CLC meeting
UNLV Asian American and Pacific Islander (AAPI) Oral History Project	Project in Progress		August 31, 2022	Extension granted until August 2022
National Atomic Testing Museum Planning & Development Project	In progress		June 2021	Extension granted until June 2022
Neon Museum Brilliant! Expansion	In progress		December 2021	Commissioners invited to VIP preview December 13, 2021
Neon Museum/Reed Whipple Expansion	Delayed		August 31, 2021	
Harrison House Restoration and Refurbishment Project	In-progress but delayed		December 2021	Will ask for extension at January CLC meeting
Blue Angel Information Board	In Progress	Will be installed January 2022		
Blue Angel Motel Statue and Sign Restoration	Restoration completed and installed on Charleston Blvd.	Will no longer have a ribbon cutting ceremony	June 30, 2021	Installed at intersection of Charleston Blvd/Fremont St/Eastern Ave on March 12, 2020.
Floyd Lamb Park Hay Barn Project	In-progress		Est. Spring 2022	Delayed due to construction material shortages
Historic Preservation Commission Funding	In-progress		December 31, 2020	Status update presented at November 15, 2021 CLC meeting
Biltmore Bungalows Survey	Delayed		December 16, 2021	NPF will give update at January CLC meeting
Revolving Fund	Delayed		December 2019	NPF will give update at January CLC meeting
Junior League Educational Mini Grants	Interrupted due to COVID-19 – currently on hold.	Extended into 2020/2021 school year	Winter 2021	
Project Enchilada Sign Restorations	In-progress		No specification	6 signs refurbished and reinstalled – 1 still undergoing work

Updates on Historic Properties				
Helen Toland Residence	Added to City of Las Vegas Register of Historic Places_16 DEC 2020			
Harrison House	Received SHPO and CLC grants for repairs			Projects in progress
Huntridge Theater	Completed			Added to Las Vegas Historic Property Register 9/01/2021 Bronze Plaque ordered 11/15/2021
Old Mormon Fort	Have expressed interest in submitting grant requests		TBD	
Old Motel Signs in East Yard	Pending interest in refurbishment of signs		TBD	Signs include: Blue Angel Gateway Arch; Fun City; Arcade [from NY]
Moulin Rouge Columns	Stored at old Cashman Center		TBD	Will be moved to East Yard in the near future
Reed Whipple Building	In-Progress		TBD	Being converted into administrative space for the Neon Museum
Safari Motel Sign	Requested funding at July Meeting – Tabled			Tabled
Scenic Byway Signs	Delayed due to COVID-19	Field documentation completed but letters to owners delayed.	March 2020	Planning Department Staff (including HPO) were completing the inventory but is now delayed due to COVID-19

HPC Projects

- Survey Catalog
 - Final product will be presented at March 23 meeting
- Las Vegas High School National Register of Historic Places – District Listing
 - With the Keeper of the Register in DC – will have answer by February 19
- National Park Service URC Grant Award
 - Contract for approval at February 23 meeting
- SHPO HPF/Centennial Commission Charleston Heights Survey Grant
 - Proposals with evaluation committee

Use of Video Conferencing

- City policy does not allow the use of video conferencing during any city meeting.
- Must ensure accurate record keeping/minimize risk of lost dialogue.
- Public can view meeting at:
<https://lasvegas.primegov.com/portal/search>
 - Can view live sessions
 - Can view recorded sessions

Huntridge Circle Park Renovation

- Public Works has a contract with Stantec Consulting Services for:
 - Creation of three site plans to meet the needs of the community.
 - The community will select the site plan through a series of meetings.
 - One example is for a fenced dog park, playground improvements, and exercise stations.
 - There will not be any buildings added to the property
- While of historic-age, the park is not on any historic registers – this is an info item only

Centennial Commission Projects

- Status the same as last update, all are in progress with the exception of delays to the following:
 - Junior League
 - Neon Museum/Reed Whipple
- Discovery Children's Museum completed their project and had film premiere January 12, 2022 - Can be viewed on You Tube:
<https://www.youtube.com/watch?v=A8HHEPv58JY>



Blue Angel Installation Complete



Story on City Beat - <https://www.youtube.com/watch?v=YwihkLyP-1U>

A Thank you from Jeannette Somma



**ARCHAEOLOGY
FAIR**



**Jan.
29,
2022**

**10 am
- 2 pm**

**Learn from archaeologists
Visit each booth to get a prize
Mock excavations on the hour**



**JAN 29, 2022
10 am to 2 pm**



\$6 for adults, free for kids!

Lost City Museum


721 S. Moapa Valley Blvd. Overton, NV 89040

702-397-2193 x 0 for more information

City Of Las Vegas Black History Month Events

- “A Focus on Portraits,” an African American Heritage Exhibition: Monday-Thursday, 7 a.m. to 5:30 p.m., Jan. 20-April 14, 2022: Free and open to the public Las Vegas City Hall Chamber Gallery, 495 S. Main St., second floor.
- “Second Annual Sharing the History of Black Firefighters in Southern Nevada” Saturday, Feb. 12, 10 a.m. Free and open to the public. Doolittle Senior Center, 1930 N. J St.
- “Heart of Black History Contest.” Entries due by 5 p.m. Friday, Feb. 18. Free and open to the public. East Las Vegas Community Center, 250 N. Eastern Ave.
- More details on these events and more on the city website:
[https://sawebfilesprod001.blob.core.windows.net/parks-recreation/Black History Month 2022/CLV Black-History-Month-2022-Brochure.pdf?sv=2017-04-17&sr=b&si=DNNFileManagerPolicy&sig=GjUXLBkKafu9AVEHxh3eX8acESzXr3q0HYOz2tVy%2BF8%3D](https://sawebfilesprod001.blob.core.windows.net/parks-recreation/Black%20History%20Month%202022/CLV%20Black-History-Month-2022-Brochure.pdf?sv=2017-04-17&sr=b&si=DNNFileManagerPolicy&sig=GjUXLBkKafu9AVEHxh3eX8acESzXr3q0HYOz2tVy%2BF8%3D)

New Chrisina Aguilera Video - <https://www.youtube.com/watch?v=pTqL6pHnAlY>

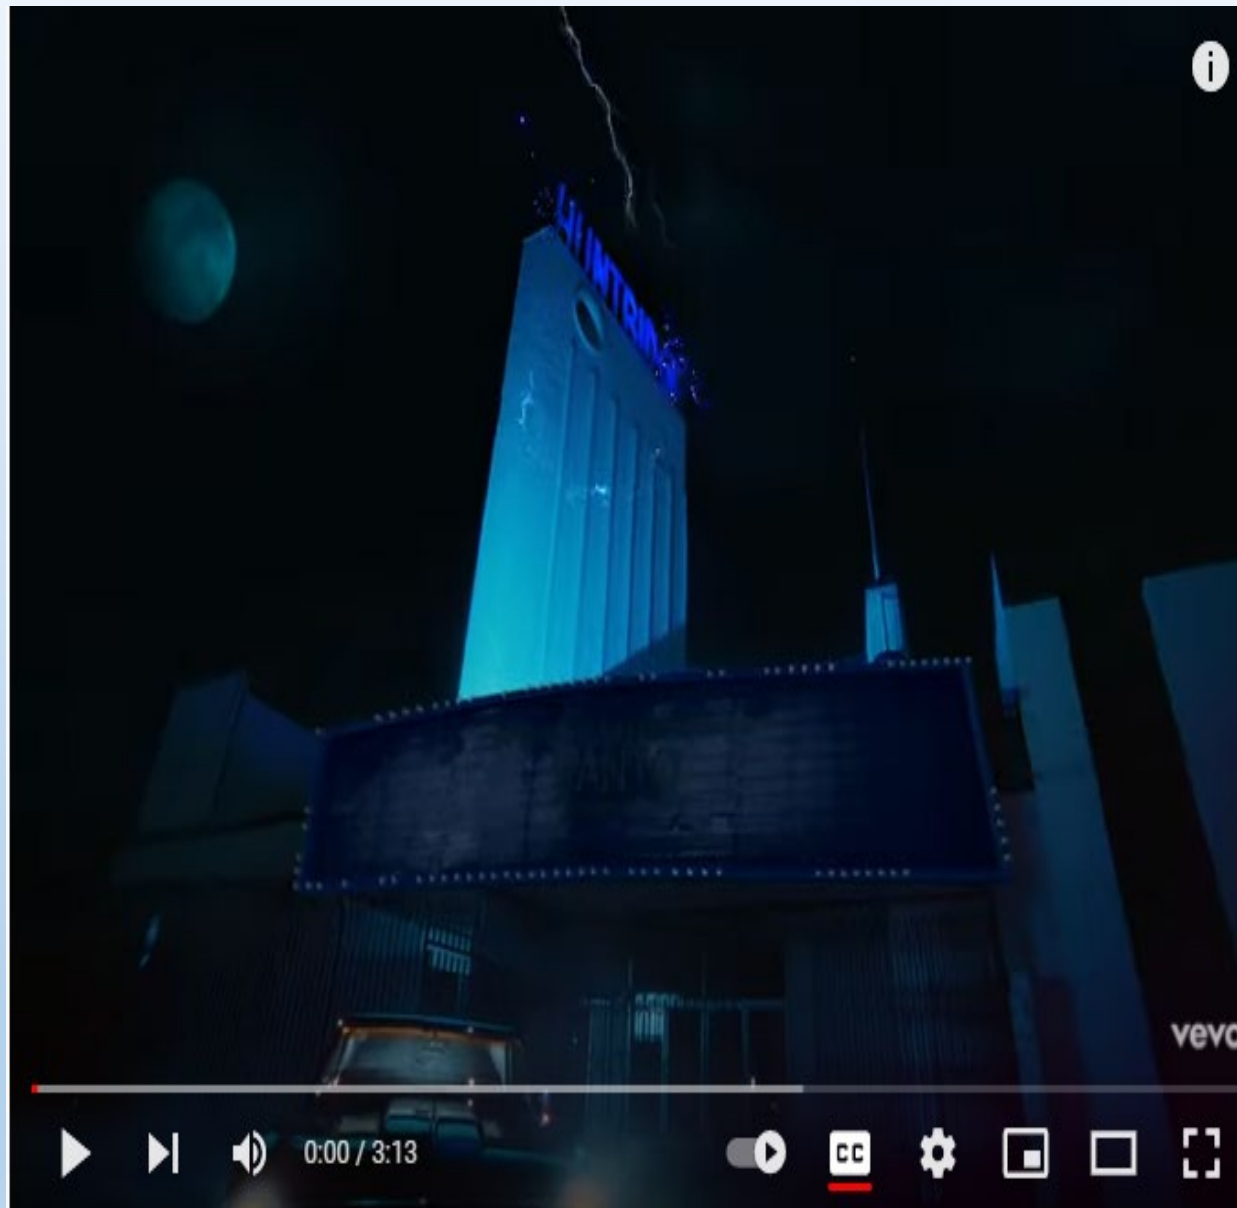

A VIDEO WAS EMBEDDED AND SHOWN FOR THIS SLIDE. IT CAN BE VIEWED BY WATCHING THE VIDEO FOR THIS ITEM.

#ChristinaAguilera #Ozuna #Santo
Special Historic Preservation Commission January 27, 2022 - Page 242
Christina Aguilera, Ozuna - Santo (Official Video)

City of Las Vegas

AGENDA MEMO SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF: JANUARY 27, 2022

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☐ Action
☒ Report

SUBJECT:

22-0013-HPC1 - Report by the Department of Planning regarding historic and archaeological resources in local media

PURPOSE/BACKGROUND:

The Commission has requested staff to compile articles relating to southern Nevada historic and archaeological resources in local media. Attached are the articles recently released in regards to Southern Nevada historic and archaeological resources. If additional articles or sources are identified by, the commission they should be communicated with staff so they can be included in future agendas.

RECOMMENDATION:

Report only; No action required

ARTICLE LINK(S):

Reclaiming Their Words: <https://www.reviewjournal.com/rj-magazine/reclaiming-their-words-2475198/>

Transforming Buildings at the Stewart Indian School Into a Cultural Center and Museum: https://savingplaces.org/stories/transforming-buildings-at-the-stewart-indian-school-into-a-cultural-center-and-museum?utm_medium=email&utm_source=newsletter&utm_campaign=weekly#.YaTqFnMKSI

Downtown Las Vegas celebrates the life of Tony Hsieh: <https://www.8newsnow.com/news/local-news/downtown-las-vegas-celebrates-the-life-of-tony-hsieh/>

SLIDESHOW: Flamingo Las Vegas celebrating 75th anniversary with look back: <https://www.8newsnow.com/news/local-news/flamingo-las-vegas-celebrating-75th-anniversary/>

Flamingo on Las Vegas Strip to celebrate 75th anniversary: https://www.fox5vegas.com/more/flamingo-on-las-vegas-strip-to-celebrate-75th-anniversary/article_dd1c2324-48a6-11ec-91f0-03837a039ebe.html

City of Las Vegas

Flamingo Las Vegas joins El Cortez marking milestone dates:

<https://apnews.com/article/lifestyle-las-vegas-casinos-d018159d3f3c30c557c70a889775a3bb>

The Neon Museum debuts new experiences with updated 'Brilliant! Jackpot' show:

<https://www.8newsnow.com/news/local-news/the-neon-museum-debuts-new-experiences-with-updated-brilliant-jackpotshow/>

Neon Museum holds preview of its immersive 'Brilliant!' show:

<https://news3lv.com/news/local/neon-museum-holds-preview-of-its-immersive-brilliant-show>

Neon Museum Show Off North New Gallery: <https://oaklandnewsnow.com/neon-museum-shows-off-north-gallery-upgrades/>

SoHo Playhouse signs on as sole operator of historic Huntridge Theater:

<https://news3lv.com/news/local/soho-playhouse-sole-operator-huntridge-theater-las-vegas>

Huntridge Theater lands new operator for theater space:

<https://www.reviewjournal.com/business/huntridge-theater-lands-new-operator-for-theater-space-2499954/>

City of Las Vegas

AGENDA MEMO **SPECIAL HISTORIC PRESERVATION COMMISSION MEETING OF:** **JANUARY 27, 2022**

DEPARTMENT: PLANNING

DIRECTOR: SETH T. FLOYD, ESQ.

HISTORIC PRESERVATION OFFICER: DR. DIANE SIEBRANDT

☐ Action
☒ Report

SUBJECT:

22-0014-HPC1 - Discussion regarding topics for future agenda items by the Historic Preservation Commission. Comments made during this portion of the agenda by individual Commission Members shall refer solely to proposals for future agenda items and any discussion shall be limited to whether or not any such proposed item(s) is/are within the purview of the Commission and/or whether such proposed item(s) shall be placed on a future agenda. No discussion regarding the substance of any such proposed topic shall occur and no action shall be taken regarding the proposal.

RECOMMENDATION:

Discussion only; No action required

BACKUP DOCUMENTATION:

None